

BUILDING AN IOT DEVICE FOR OUTDOOR USAGE: A STEP-BY-STEP TUTORIAL





PROF. CONGDUC PHAM
[HTTP://WWW.UNIV-PAU.FR/~CPHAM](http://www.univ-pau.fr/~cpham)
UNIVERSITÉ DE PAU, FRANCE



CONTENTS

- This could be seen as a second part of « Low-cost LoRa IoT device: a step-by-step tutorial »
- We will show here how fit the IoT device for outdoor usage, again, at a very low cost
- Let's get started...



GET A BOX FOR OUT-DOOR USAGE

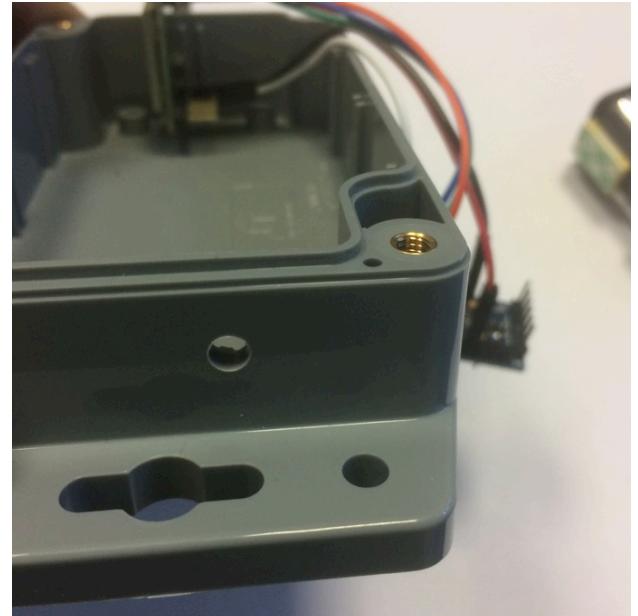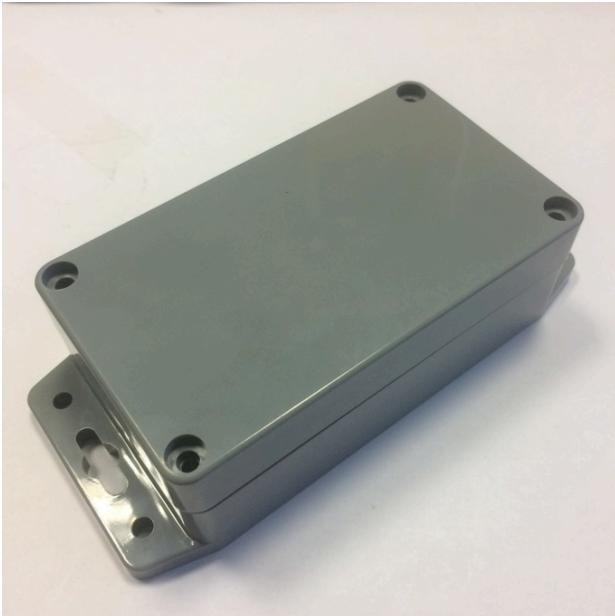

I got mine from Lextronic (<http://www.lextronic.fr/P22453-boitier-etanche-115-x-65-x-40mm.html>). It is an IP65 box which dimension is 115 x 65 x 40mm.

First thing is to drill a 8mm hole for the radio module and the antenna. At the other end, drill a smaller hole (4mm or 5mm) for the sensor wire. Drill as many holes as needed.


PUTTING THE ANTENNA

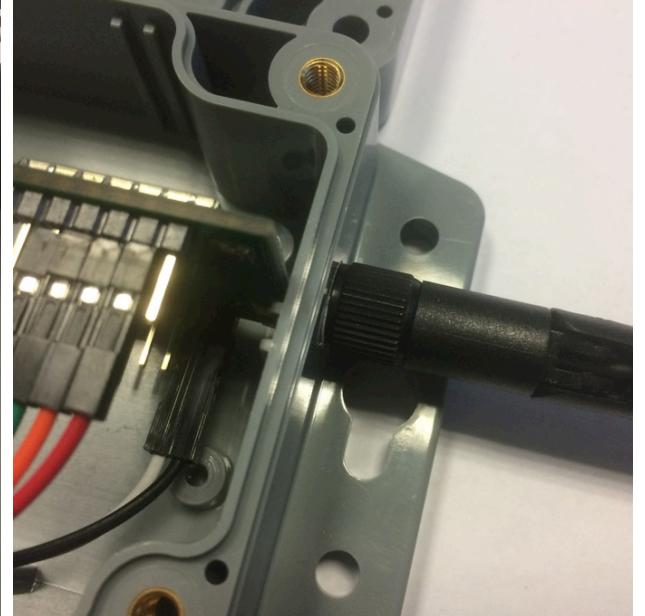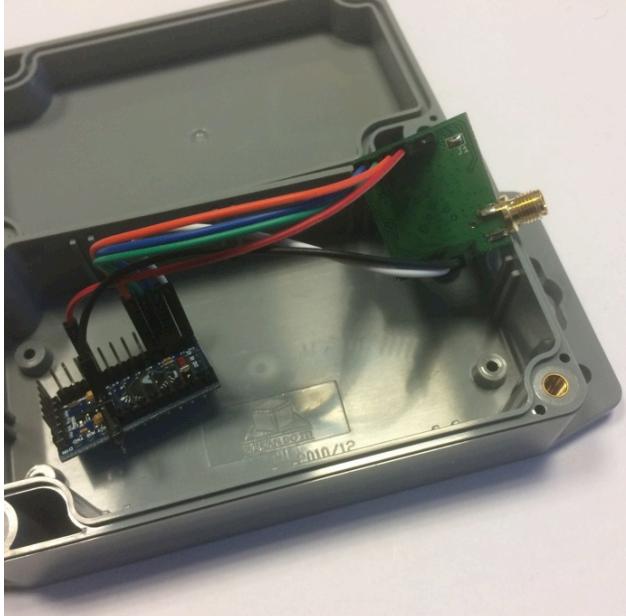

Take the IoT device that has been built previously with the « Low-cost LoRa IoT device: a step-by-step tutorial ».


Put the antenna plug through the 8mm hole. Screw the antenna, but not too firmly, the radio module should be a bit loose here before closing the box.

ADD THE POWER SUPPLY

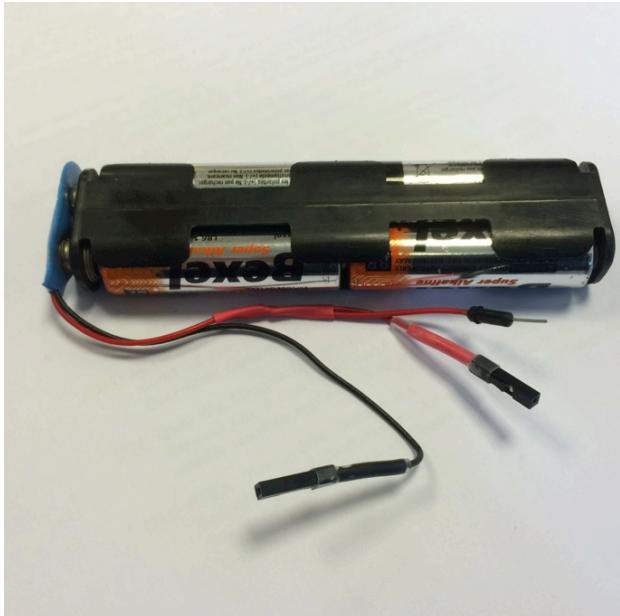

Instead of the long 4-AA battery coupler used in the previous tutorial, use a more compact version and solder 2 wires for the + (Vcc) and the - (GND). The voltage with 4-AA batteries is about 6v. The - wire should have a female connector at the other end to be plugged on the Pro Mini board directly. For the + wire, use whatever you want but it is advise to not connect the + to the board directly but rather use an other wire to easily switching ON/OFF


FIXING THE COMPONENTS

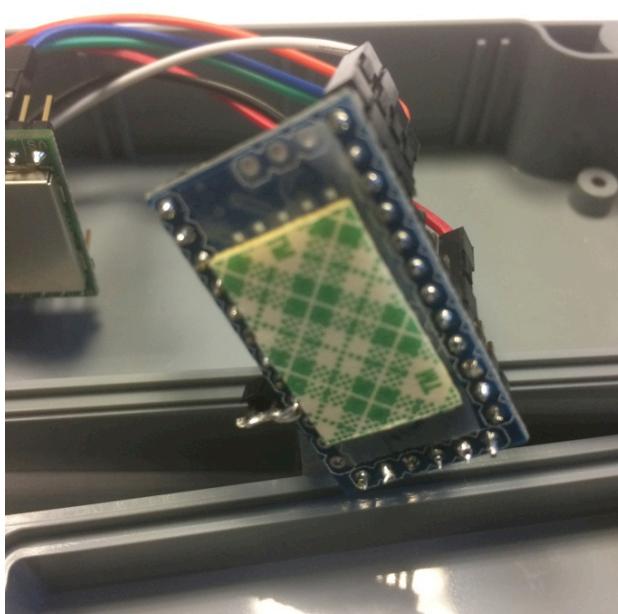

To firmly fix the board and the power supply in the box, I use double-side tape, the one used to fix mirror on the wall. For the board, it is better to use regular tape first between the board and the double-side tape because such tape can be very sticky and hard to remove.



PUTTING EVERYTHING IN THE BOW


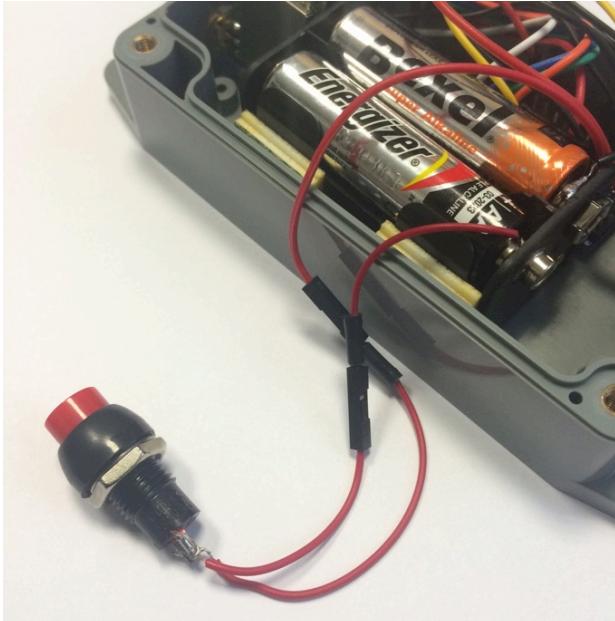


Now, put the board and the power supply in the box.

See how the Vcc is connected using an intermediate wire to ease manipulation.

Or use an ON/OFF push button if you want.



WAZIUP TEMPERATURE SENSOR

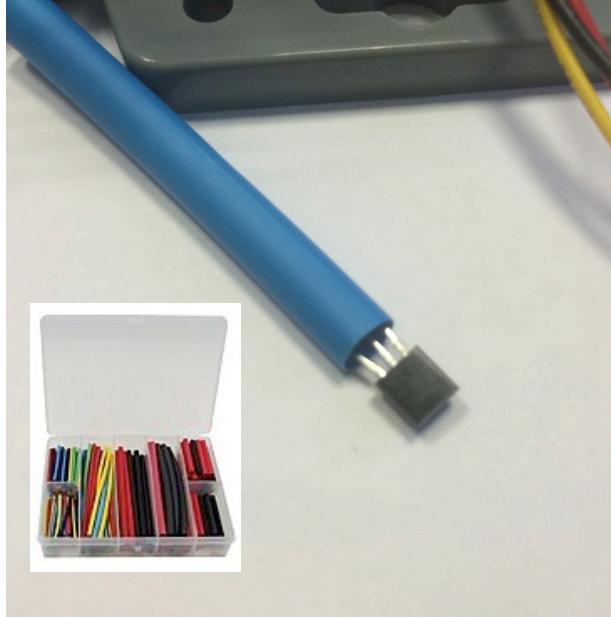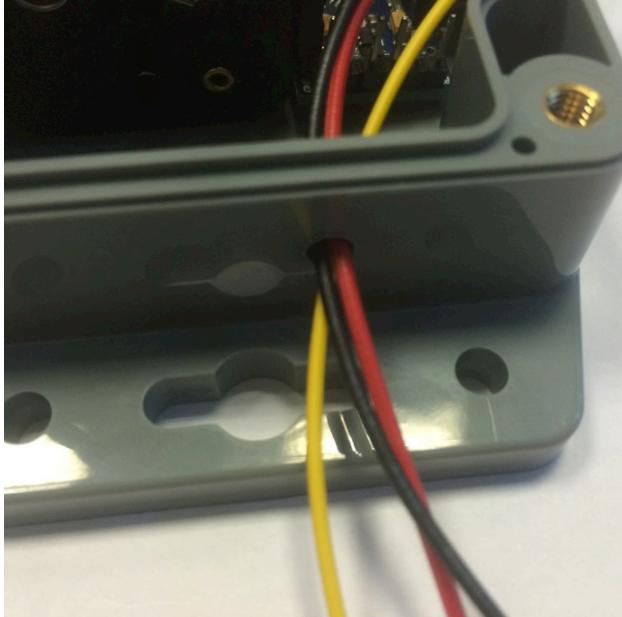

We will use the same temperature sensor than in the previous tutorial. We need 3 wires and we also need to make the design a bit more water and dust proof. First, use 3 wires with a female connector at one end that will be plugged into the board. Pass the wires through the smaller hole, leaving the female-connector side in the box.

To protect the sensor, use heat-shrink sleeve. Use a diameter that is large enough for the plastic part of the sensor to go through.



PREPARING FOR THE TEMPERATURE SENSOR (2)

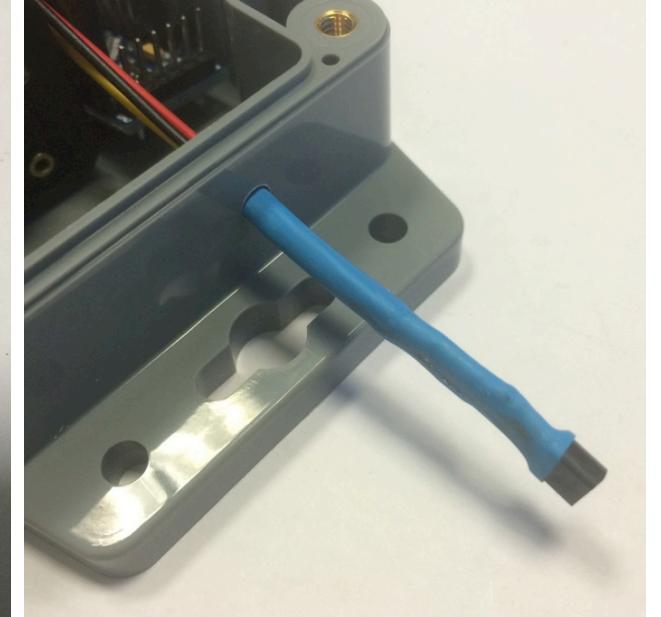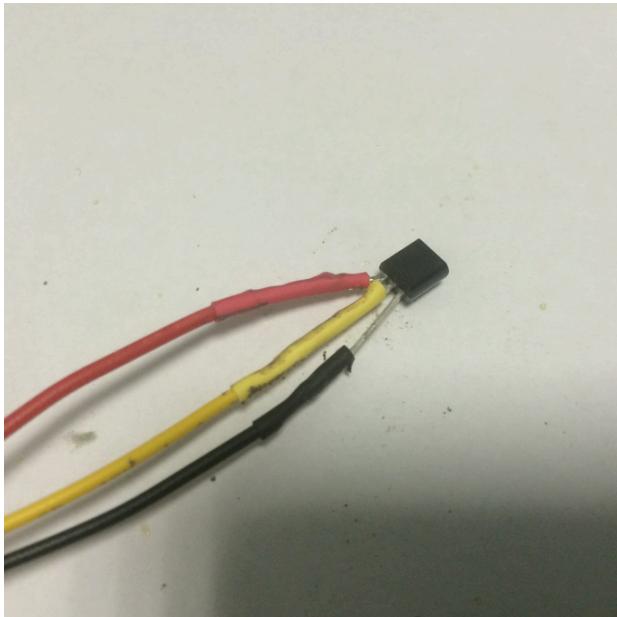


At the other end of the wire, you can just solder. Once again heat-shrink sleeves is great to isolate the wires.

Once all wires have been soldered, place the larger heat-shrink sleeve and protect all wires. BE CAREFULL, you have to place the sleeves before soldering, then slice them in place before heating.

CONNECTING THE SENSOR


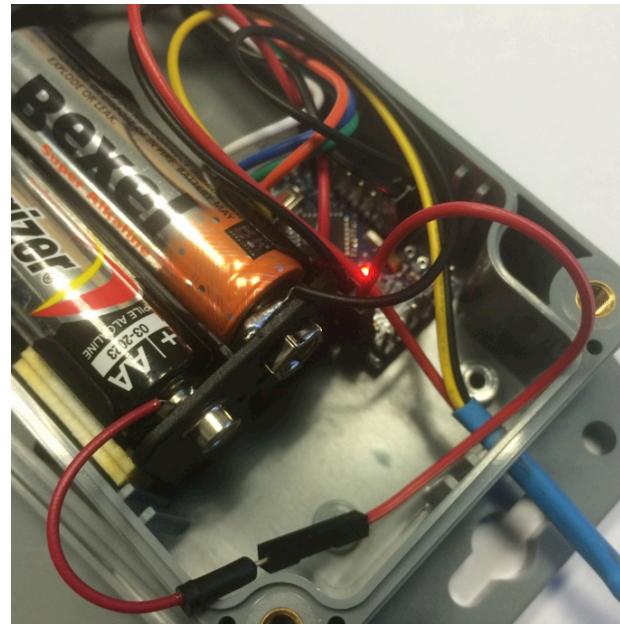
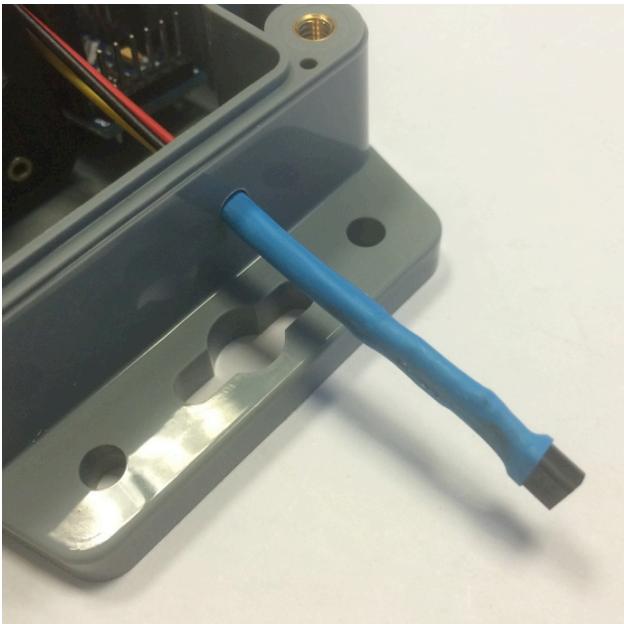


Connect the sensor's wires as described in the previous tutorial.

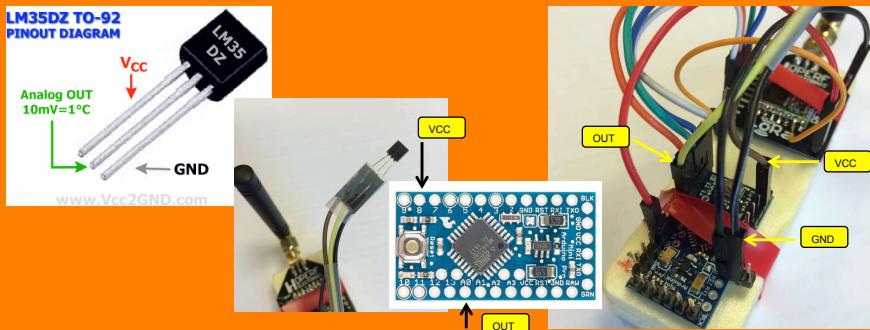

The GND should be connected to one of the board's GND, the VCC should be connected to the analog A8 pin and the OUT pin should be connected to the analog A0 pin.



LAST STEP AND DEPLOYING YOUR IOT DEVICE

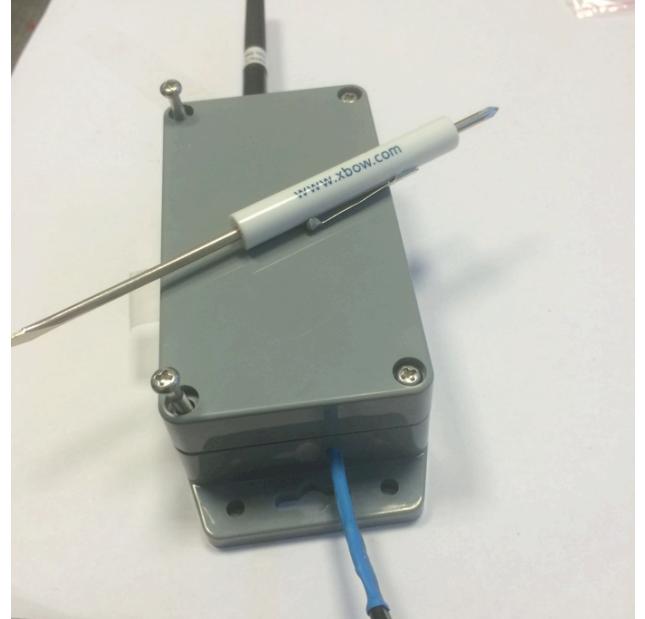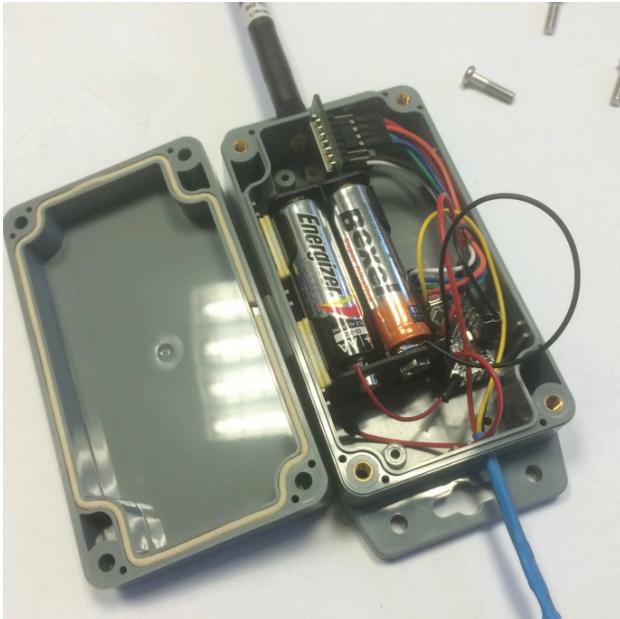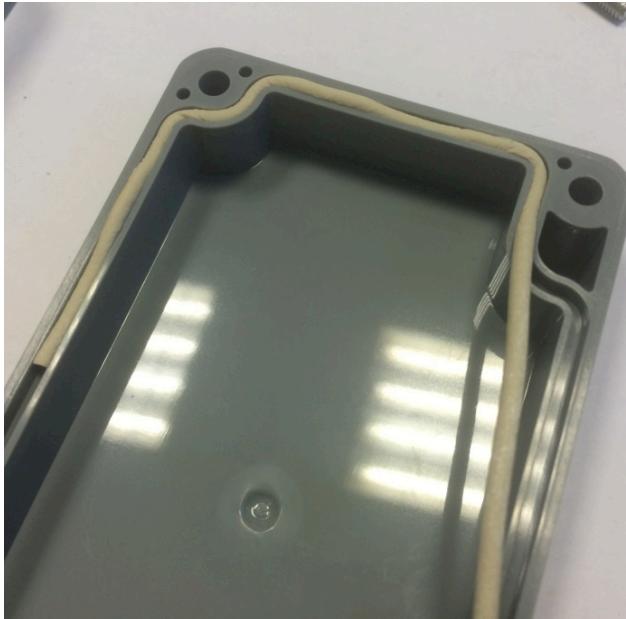

Program your board to have duty-cycle for low-power operation mode. Connect the Vcc wire, check that you receive the data on the gateway and then close the box. You can now screw a bit more firmly the antenna.

With 1 sample every hour, your device should be capable of running for several months.



USE LONGER CABLE FOR YOUR SENSOR

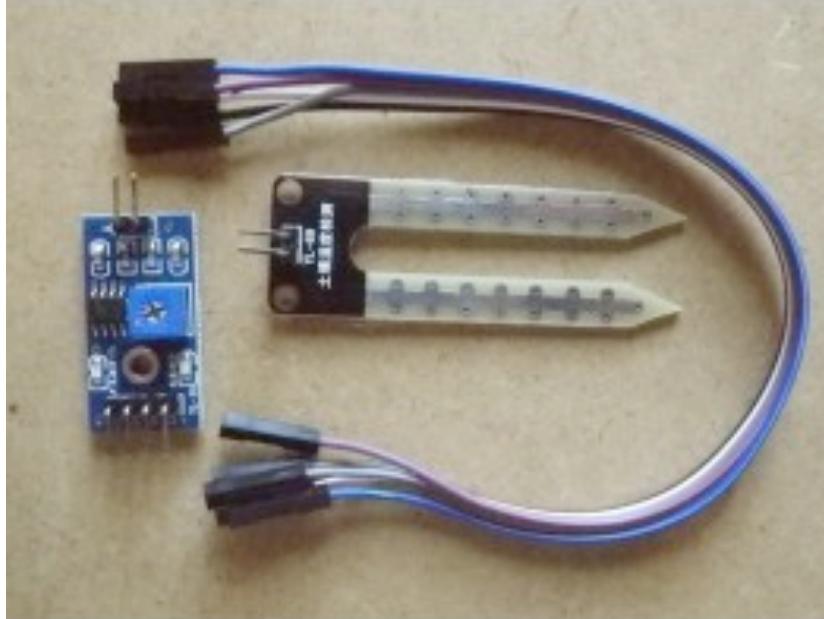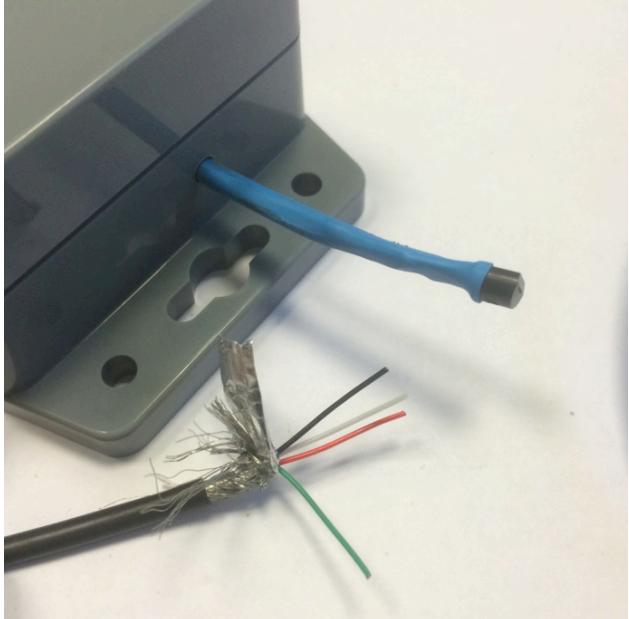

If you need longer cable for your sensor (like more than a meter, for instance for soil humidity sensor) it is of course not convenient to use heat-shrink sleeve to protect the wire.

A very low-cost solution is to use an old USB cable (there are plenty of them unused!) that already has the necessary plastic coating and that contains 4 wires for your own usage.


ANOTHER BOX EXAMPLE

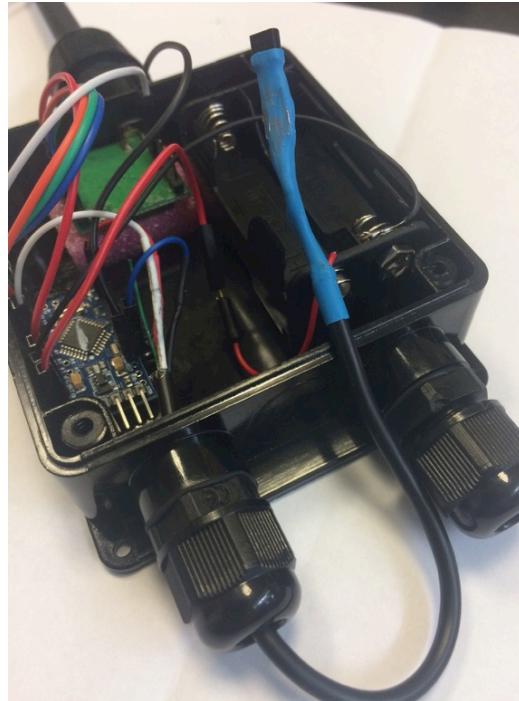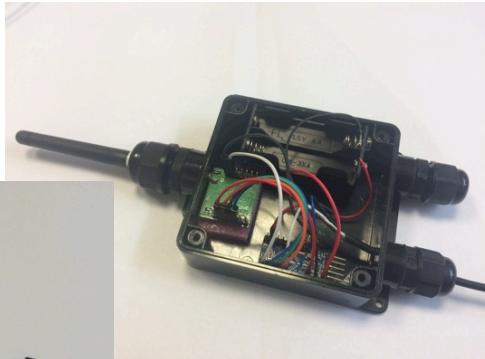

This box comes with 3 cable glands that are very convenient for the antenna and the sensor cables. Got it from here: <http://www.lextronic.fr/P34821-boitier-etanche-avec-3-presses-etoupes.html>



An old USB cable (with some soldering work) is used to connect the temperature sensor: 3 wires from the 4 available are used.

OUTDOOR TEST

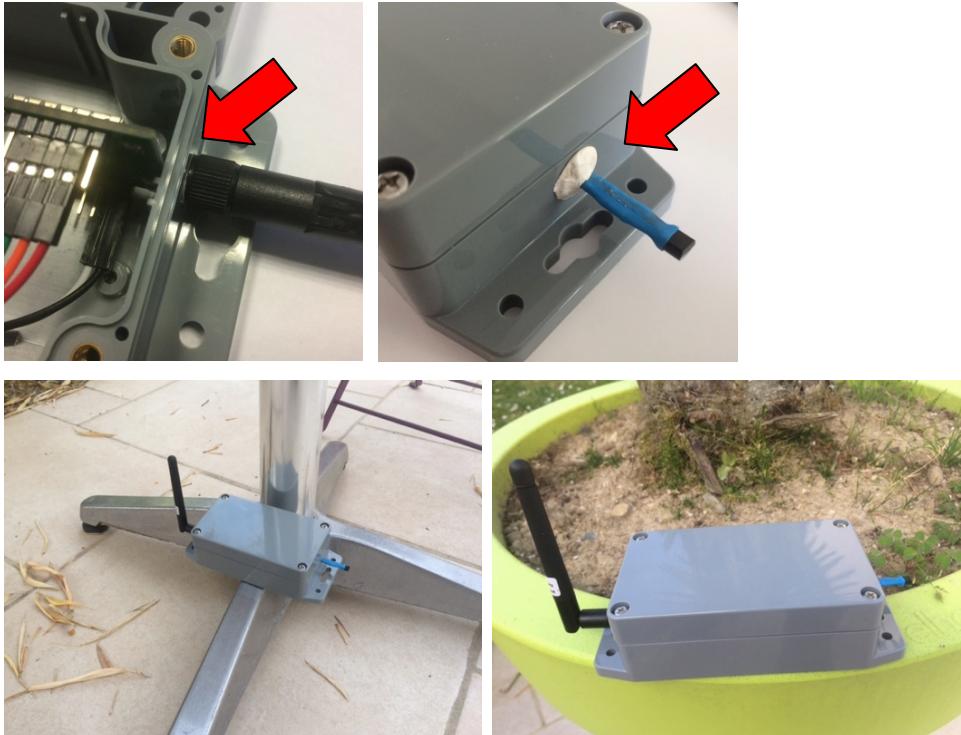


Put some silicone/putty at the antenna and sensor wire junction to avoid humidity in the box. After closing the box, tighten the antenna now if needed.

Outdoor test from May 6th to May 8th, 2016

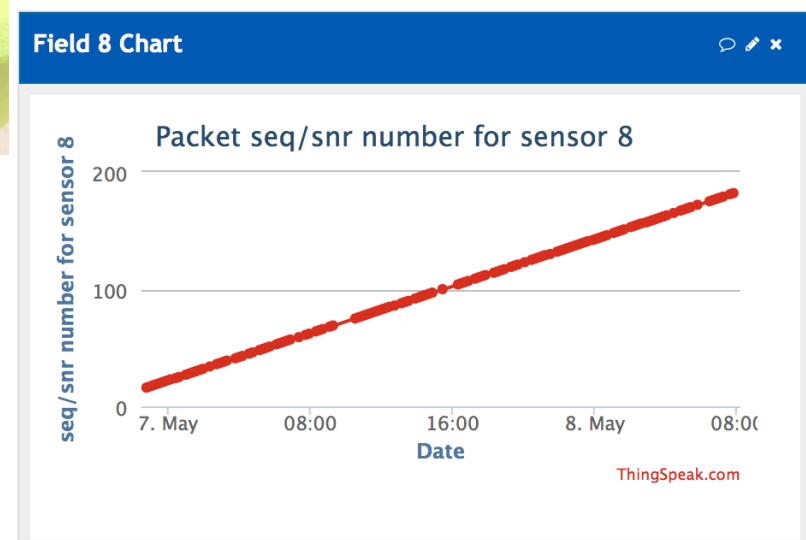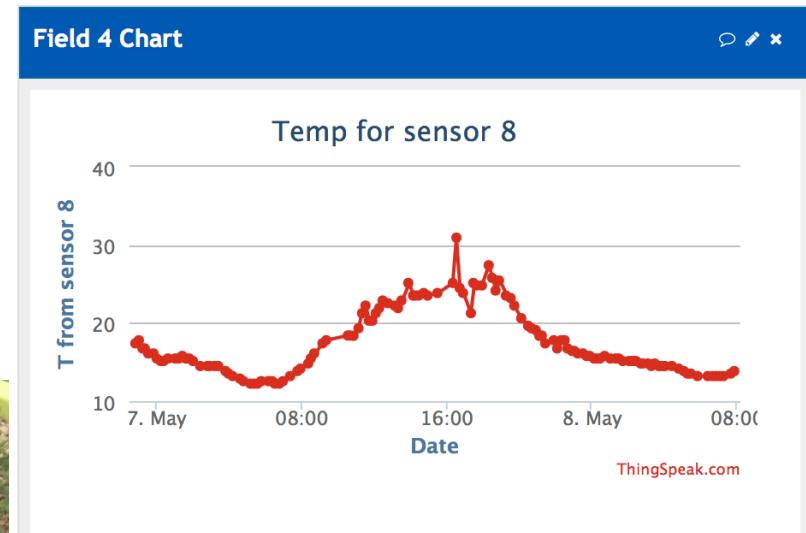

INSTALLING YOUR OWN CABLE GLAND

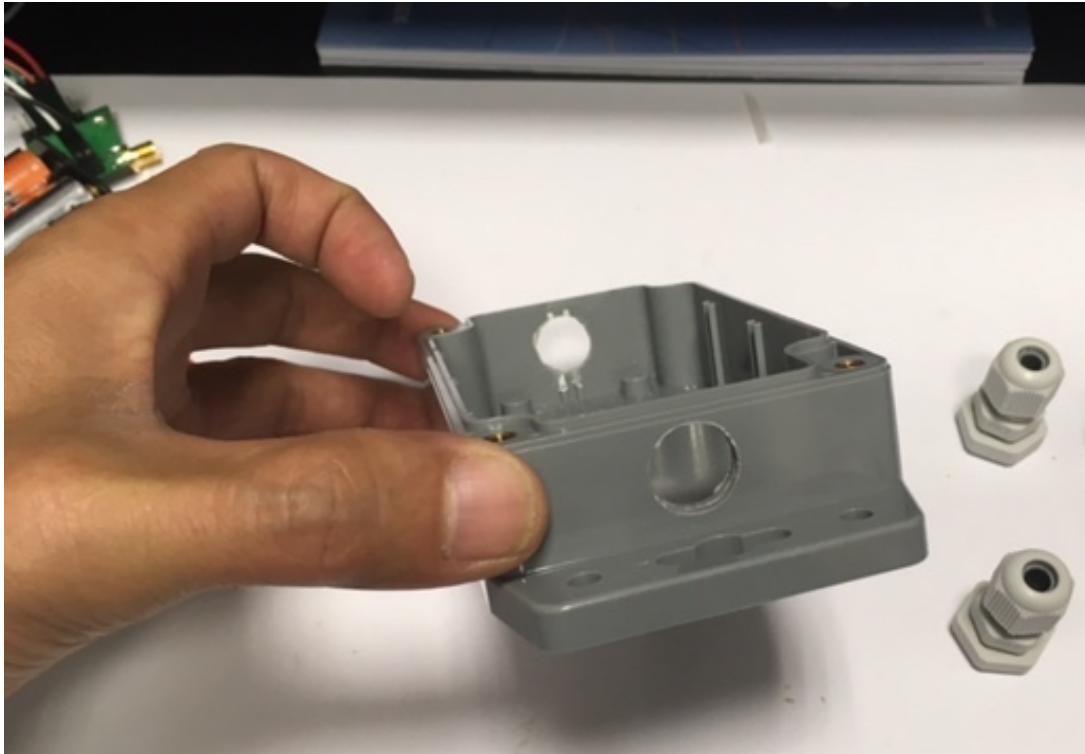

Drill a hole depending on the gland diameter (here PG7, 12mm, so hole of 13mm)

PROTECTING FROM DIRECT SUN



Any plastic cover would do ! But avoid transparent plastic. Here a CD cover with white paper. Do not completely cover with a plastic box neither.

BETTER ANTENNA PLACEMENT



As can be seen here, when the device is close to the ground, the antenna may be not in optimal position.

It is possible to use 1m or 2m of antenna coaxial cable. Take a good quality (e.g. RG58 minimum) to limit attenuation. 2m is reasonable but try to have it the shortest possible.



Look at the antenna tutorial for instructions on how to build your own cable (with adequate connectors) at the correct length.





CABLE GLAND FOR ANTENNA CABLE



If a cable gland is used for the antenna cable, take at least PG9 so that the antenna connector can go through.