


24VAC INPUT, PROTECTION & 3.3V BUCK

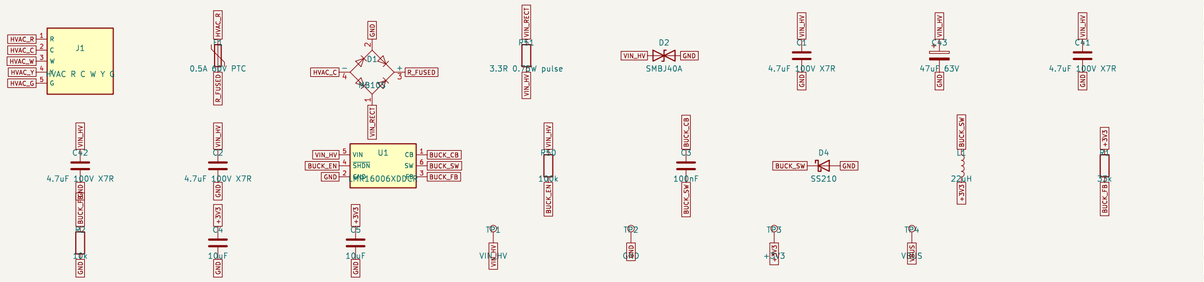


USB-C (FLASHING ONLY) & POWER-PATH — do not connect USB to an earthed PC while 24VAC is wired

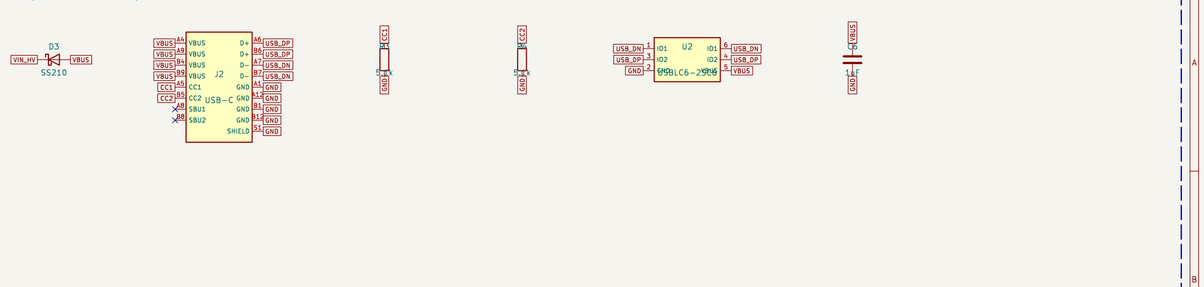


ESP32-C6 MCU, RESET/BOOT, WATCHDOG, STATUS LED

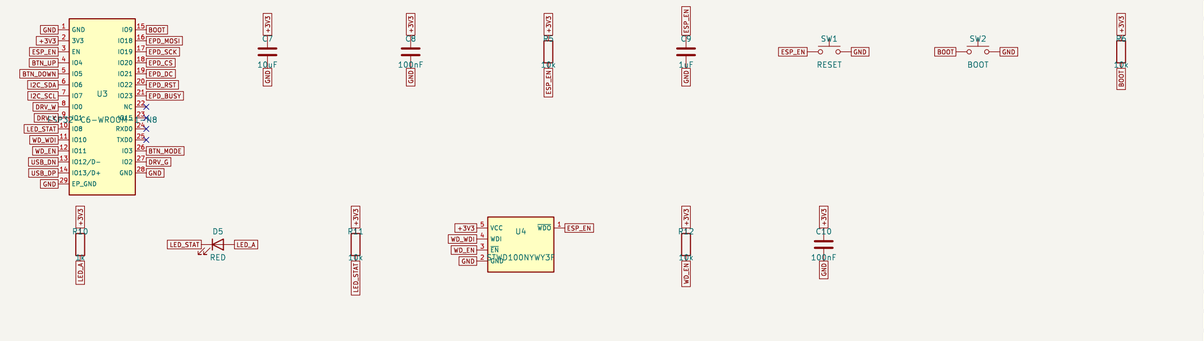


HVAC OUTPUTS W / Y / G (zero-cross opto + triac, snubbers DNP)

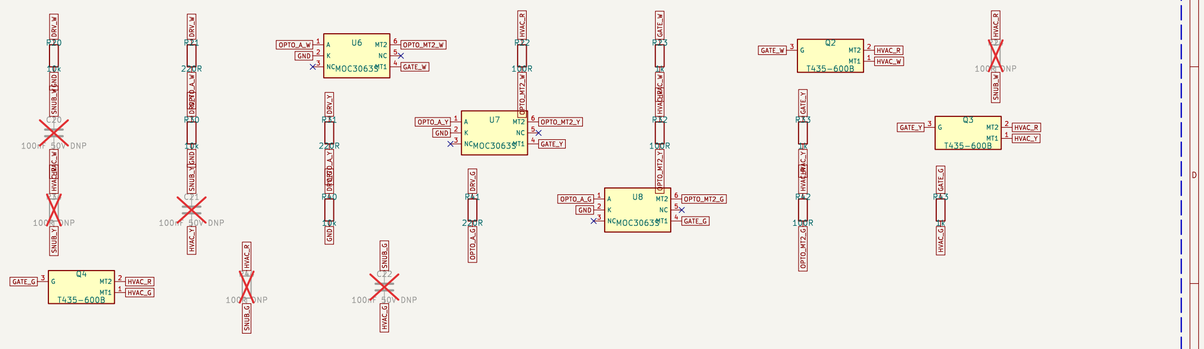

2.9in E-PAPER (GDEY029T94) FPC + BOOST (Good Display ref. circuit)

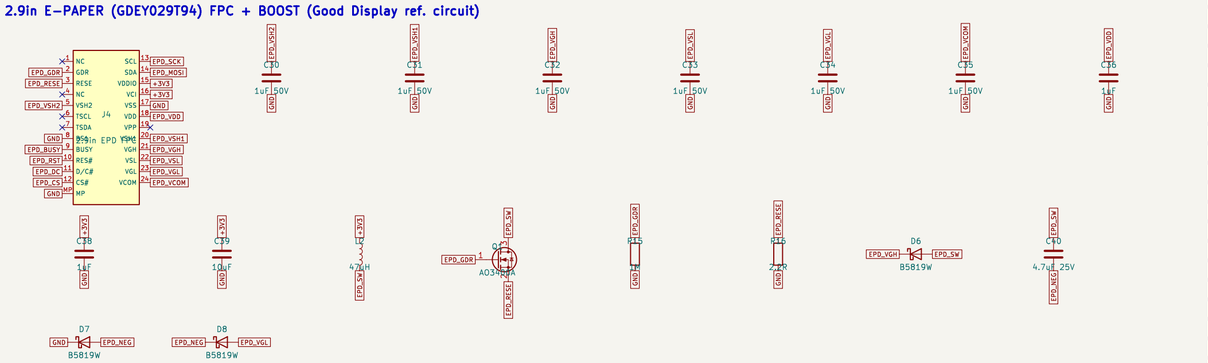

SHT40 (THERMAL ISLAND), STEMMA QT, UI BUTTONS, MOUNTING

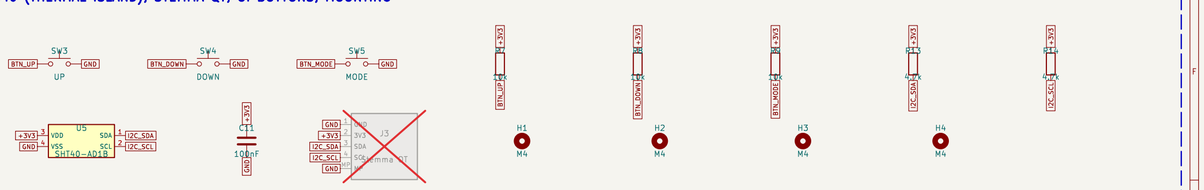

ESP32-C6 Zigbee, 24VAC R/C/W/Y/G, JLCPCB assembly

Sheet: /
File: thermostat-v3.kicad_sch

Title: Connie's Super Awesome Thermostat V3

Size: A2	Date:	Rev: 3.0
KiCad E.D.A. 9.0.2		Id: 1/1