

xxx_paper_100.pdf

Water Quality Modeling and Prediction Method Based on Sparse Recurrent Neural Network^{*}

Zhenbo Cheng, Zhengyuan Shen, Tianqi Zhu, Huaidi Lin, and Leilei Zhang

²
Zhejiang University of Technology, Hangzhou, China
czb@zjut.edu.cn

Abstract. It is an important prerequisite for scientific management and maintenance of water resources to accurately predict all kinds of indicators that affect water quality. This paper proposed a method of forecasting water quality index and rank based on sparse recurrent neural network (SRNN). Based on the principle of minimum mean square recursive error, the training algorithm of the network was designed. The neural network was used to construct a water quality prediction model. The experimental results showed that the model can be used to predict the trend of water quality in Zhejiang province.

Keywords: Water quality modeling· Water quality prediction· Recurrent neural network.

⁶ 1 Introduction

With the rapid economic development and population growth, sewage and wastewater generated by the production and living of human are posing a serious threat to the water quality of lakes and rivers[17]. There are various problems such as water shortage, water pollution and deterioration of water ecological environment in all parts of China[17], which has become the main bottleneck restricting the sustainable development of economy and society. In order to effectively solve this problem, the rational planning of water resources is particularly important[11, 10]. Accurate detection of water quality parameters of rivers and lakes, as well as reasonable prediction of future changes in water quality parameters[3], is a necessary prerequisite for scientific planning of water resources. Water quality prediction is the process of constructing a water quality model using existing data and then estimating the future water quality parameters of the predicted point via the model. Common predictive models can be divided into two categories: Principle Driven Model (PDM) and Data Driven Model (DDM).

PDM is generally based on the principle of mass and energy conservation, and considers the interaction between water quality components and its own biochemical effects, and then through the construction of hydrodynamic motion and energy equations of water[13, 4]. Typical principle driven water quality

¹⁴
^{*} This work is supported by Public Projects of Zhejiang Province (2016C31G2020069) and the 3rd Level in Zhejiang Province “151 talents project” to Zhenbo Cheng.

models include the Streeter Phelps(SP) model for quantifying oxygen balance[2], which is often applied to simple water body self-purification; a QUAL model capable of simulating up to 15 water quality components[13], which is often used to study the impact of influent wastewater load on the water quality of the receiving river; the Water Quality Analysis Simulation Program(WASP) model of pollutant interaction[4] and the BASINS model combined with geographic information system[13, 14]. The above prediction model has been widely used in water pollution control and early warning, water quality planning and other fields because it can accurately describe the relationship between various components of water. For PMD, however, once the factors affecting water quality change, it is often necessary for domain experts to redesign the model, resulting in the lack of flexibility in the application of such water quality models.

The construction of DDM which is different from PDM does not necessarily require the participation of domain experts. It only needs to input a large amount of water quality data into a learning model, and then adjust the parameters of the learning model according to the algorithm to obtain the mapping between the input data and the data to be predicted. The learning model with adjusted parameters can be used for water quality prediction. Common learning models include various regression analysis based on statistical principles[6, 23, 22, 20] and artificial neural network (ANN)[15, 7, 18, 9, 16, 19]. Because these models have a learning process, they can be applied to various water quality predictions under environmentally variable scenarios.

In order to obtain higher prediction accuracy, the ANN commonly used in DDM often needs a large number of historical water quality data, and then automatically learns the water quality prediction model to meet the demand according to the historical data. However, the back propagation (BP) network which is commonly used in ANN often has the disadvantage of slow convergence speed. In addition, BP network is a typical feedforward structure neural network, but water quality data is often a time series[21]. BP network is difficult to simulate the time correlation between water quality data. Therefore, based on the latest theoretical research results of the prefrontal cortex in neuroscience[1, 5], this study quickly constructs a model between water quality data through a recursive least mean square error algorithm by constructing a sparsely connected large-scale recurrent neural network. The accuracy of the model was verified by predicting the water quality indicators such as ammonia nitrogen (AN), dissolved oxygen (DO), permanganate index (PI), total phosphorus (TP) and total nitrogen (TN) in a river.

2 Water quality model

This study used a sparsely connected recurrent neural network (SRNN) to simulate the temporal correlation between water quality data. SRNN which is unlike common recurrent neural networks contains a large number of neurons. The positive and negative connection weights between neurons are roughly the same. In particular, when the intensity coefficient of weighted connections between

neurons in SRNN exceeds a certain threshold, the spontaneous activity of the recursive network will exhibit chaotic characteristics[16]. This feature makes the network have strong state coding capabilities. SRNN has been widely used in cognitive modeling of neuroscience. Some theoretical neuroscientists even speculate that SRNN is similar to the function of the prefrontal cortex of the brain[19].

2.1 SRNN network structure

As shown in Figure 1, the SRNN contains three parts, an input layer y , a recursive layer x , and an output layer z . Vector $y = [y_1, y_2, \dots, y_m]^T$ represents the input layer neuron activity, where y_i is the input water quality indicator and the superscript T is the transpose.

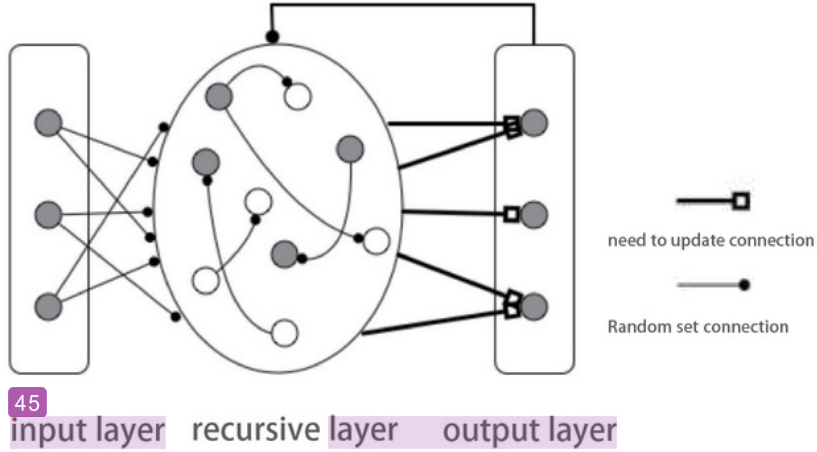


Fig. 1. Structure of SRNN

Neuronal activity level is represented by recursion x , whose activity was calculated by the formula:

$$\tau \frac{dx}{dt} = -x + w^{RNL}r + w^{in}y + w^{fb}z, \quad (1)$$

where $r = \tanh(x)$ represents the rate of release of recurrent layer neurons and \tanh is a hyperbolic tangent function as well as the activation function of recursive layer neurons. $\tau = 0.01$ is the neuron activity decay constant.

w^{RNL} represents the recursive connection matrix between neurons in the recursive layer. Since the recursive layer has $N = 1000$ neurons, w^{RNL} is a matrix of size 1000×1000 . The element w_{ij}^{RNL} in the matrix represents the connection

weight between the i -th neuron and the j -th neuron in the recursive layer. The recursive layer is a sparse connection, and w_{ij}^{RNL} sets the probability of $p = 0.1$ to a non-zero value and the probability of $1 - p = 0.9$ to zero. This means that only a few of the reciprocal layer neurons have a mutual connection. The value of the non-zero element of w_{ij}^{RNL} is randomly selected from the Gaussian distribution $Norm(0, g^2/pN)$, where g is the intensity coefficient of weight. When $g \geq 1.5$, the recursive layer neurons will have the spontaneous activity of chaotic characteristics[16].

w^{in} represents the connection matrix between the input layer and the recursive layer. The weights are randomly selected according to the Gaussian distribution $Norm(0, 0.5)$. w^{fb} is the connection weight of the output neuron feedback back to the layered neuron. It is still a sparse connection. 90% of the weights are set to 0, and other non-zero elements are still randomly selected according to the Gaussian distribution $Norm(0, 0.5)$. z is the output layer neuron activity, corresponding to the predicted output, and its calculation is determined by:

$$z = wr \quad (2)$$

where w represents the connection matrix between the recursive layer and the output layer. The recursive layer and the output layer are fully connected, and the weights are randomly assigned according to a uniform distribution between $[-1, 1]$. w is different from w^{RNL} , w^{in} , and w^{fb} , and its element values need to be updated during the learning phase, while the values of w^{RNL} , w^{in} , and w^{fb} remain unchanged during the learning phase.

As can be seen from the structure of SRNN, it is similar to the Echo State Network (ESN) [12]. They all have a recursive layer and the learning process only adjusts the weight between the recursive layer and the output layer. However, SRNN and ESN also have the following differences. First of all, the SRNN's recursive layer connection weight does not need to be specially set, but the ESN needs to have a weight matrix with a spectral radius greater than or equal to 1 in order to achieve reverberation. Secondly, the training of ESN is a kind of offline learning. It needs to wait for the network to pre-calculate for a period of time before starting to adjust the weight, but SRNN can update the weight immediately according to the current input.

2.2 SRNN learning algorithm

According to the description of SRNN in the previous section, the recursive layer connection weights only need to be randomly selected according to a given probability distribution and use the online learning mode. These features require a learning algorithm that quickly determines how the output weight should be updated so that the network output is equal to the value of the real output.

The target output expected at time t is $r(t)$. The real output of the network is $w^T(t - \Delta t)r$. The error between them is $e(t)$.

$$e(t) = w^T(t - \Delta t)r - f(t) \quad (3)$$

The learning algorithm is to adjust the output weight from $w^T(t - \Delta t)$ to $w^T(t)$ so that the error $e(t)$ is gradually reduced. After the output weight is updated, the output error of the network becomes:

$$e_+(t) = w^T(t)r - f(t) \quad (4)$$

After the algorithm converges, the value of $e(t)/e_+(t)$ should go to 1 and $e(t) > e_+(t)$. This means that the adjustment of the output weights will not further reduce the output error. In order to achieve fast learning, the weight adjustment of the output requires a quick reduction in the error value during the previous learning. To this end, according to the recursive least mean square error algorithm [8], the output weights are adjusted as follows:

$$w(t) = w(t - \Delta t) - e(t)P(t)r(t) \quad (5)$$

Equation 5 shows that the decision to update the output weight is the error $e(t)$, the firing rate r of neurons in the recursive layer, and the matrix $P(t)$.

The matrix $P(t)$ can be seen as the learning rate, which is used to determine the size and scale of connection weights adjustment. However, it is unlike the general learning rate, this learning rate is a matrix. It means that each output weight has its own learning rate, which is one of the main reasons that the algorithm can converge quickly.

The computation of the learning rate matrix $P(t)$ is carried out in the following way:

$$P(t) = P(t - \Delta t) - \frac{(P(t - \Delta t)r^T(t)P(t - \Delta t))}{(1 + r^T(t)P(t - \Delta t)r^T)} \quad (6)$$

$P(t)$ needs to have an initial value in the first step, and then update it every step according to Equation 6. The initial value of $P(t)$ is set to $\frac{1}{\alpha}I$, where I is a unit matrix of 1000×1000 , and α is a constant.

3 Experimental result

3.1 Water quality data preparation

This study selects the water data of a reservoir in Zhejiang from May 2012 to May 2015. The data source is the actual value of the water detection by the automatic monitoring station every 4 hours. Dissolved oxygen, permanganate index, ammonia nitrogen, total phosphorus and total nitrogen, were selected to evaluate the water quality grade. In addition, in order to reduce the influence of daytime illumination and human activity factors, only the water data at 4 o'clock in the morning is selected. Considering the possible abnormalities of the water quality parameters in the measurement, the data is preprocessed to remove some obvious abnormal data. It uses the Grubbs criterion for outlier detection. First of all, the data is sorted in ascending order. The outliers are sequentially

removed from both ends until the data set meets the requirements. In order to determine the anomaly data, it need to calculate:

$$G_i = \frac{|X_i - \bar{x}|}{S} \quad (7)$$

where G_i is characteristic data of the Grubbs criterion test. X_i is the data to be tested. \bar{x} is the arithmetic mean of the data set. S is the standard deviation of the data set. If G_s is bigger than $G_p(n)$, it is judged that the data is an abnormal value. The critical value $G_p(n)$ determined by the Grubbs table. It is related to the detected level $\sigma = 0.05$ and the number n of data of the test data set.

Since the units and the detection range of the water body index are not uniform, the input data needs to be normalized. The value of the input data x is mapped between 0.2 and 0.8. The normalization formula is as follows:

$$y = 0.6 * \frac{x - \min(x)}{\max(x) - \min(x)} + 0.2 \quad (8)$$

The minimum time unit of the data set is day T . T was taken from 7 days, 14 days, and 30 days. They respectively generate 3 sets of training and testing data sets. The water quality data of the data set from May 1, 2012 to April 30, 2014 are selected as training data. The water quality data of the data set from May 1, 2014 to April 30, 2015 are selected as testing data. Ammonia nitrogen, dissolved oxygen, permanganate index, total phosphorus and total nitrogen were selected as the measured parameters to verify the effectiveness of SRNN.

3.2 Water quality parameter prediction

Water quality data for several days are used as input to predict water quality afterwards parameters. Network performance is quantified by calculating the root mean square (RMS) error:

$$RMS = \frac{1}{t_e - t_s} \sum_{i=t_s}^{t_e} \sqrt{(\bar{y}(i) - y(i))^2} \quad (9)$$

where $\bar{y}(i)$ and $y(i)$ are network estimates and real values. t_e and t_s are the start time and end time. The training results of the ammonia nitrogen index are selected to examine the convergence of SRNN. The number of recursive layer neurons is set to 1000. The weight intensity coefficient g is set to 1.5. The step size of Equation 1 is set to 0.05. The constant α of the learning rate matrix P is set to 1.5.

Figure 2 shows the learning curve of SRNN, that is the change of RMS with the number of iterations. The data in the figure is the result of repeating 10 training sessions. It can be seen from the figure that the value of RMS gradually decreases with the number of iterations. It converges after about 15 iterations, which indicates that the training speed of SRNN is faster.

Although the SRNN training converges faster, it is necessary to calculate the prediction result of SRNN under the test data in order to characterize the

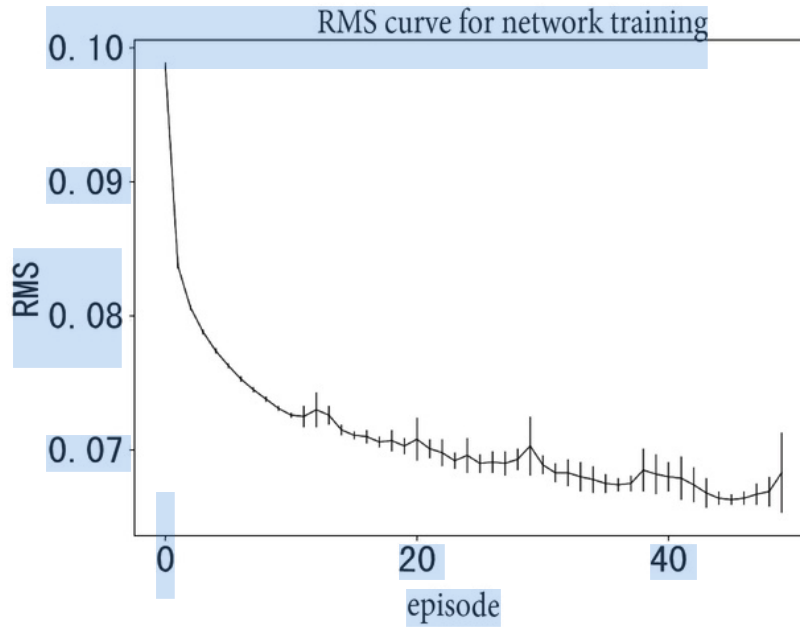


Fig. 2. Learning curve for SRNN

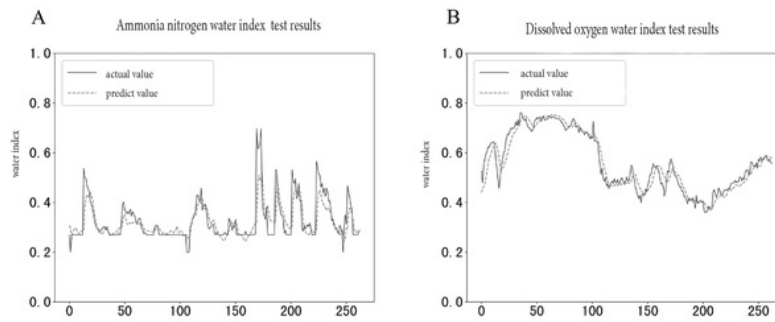


Fig. 3. Prediction results for ammonia and dissolved oxygen using SRNN

prediction ability of SRNN. We test the prediction results of SRNN on ammonia nitrogen and dissolved oxygen in water quality. The predicted result is shown in Figure 3. The solid line is the measured data of ammonia nitrogen and dissolved oxygen, while the dotted line is the predicted result given by SRNN. Ammonia nitrogen refers to nitrogen in the form of free ammonia (NH_3) and ammonium ions (NH_4^+) in water. The ammonia nitrogen wastewater is mainly derived from chemical fertilizer, coking, petrochemical, pharmaceutical, food, landfill and so on. The discharge of a large amount of ammonia nitrogen wastewater into the water not only causes eutrophication of the water, but also causes black odor in the water. The trend of the change of ammonia nitrogen in time in Figure 3 indicates (solid line) that the change of ammonia nitrogen in water is extremely unstable and there are often mutations. The dissolved oxygen content in the water is closely related to the partial pressure of oxygen in the air and the temperature of the water. Compared with the ammonia nitrogen index in water, the change of dissolved oxygen index is relatively flat. It is not difficult to find from the prediction results in Figure 3 (dashed line) that SRNN can accurately predict these two water quality indicators whether it is for the ammonia nitrogen index with mutation (Figure 3(A)) or for the relatively stable dissolved oxygen (Figure 3(B)). The prediction errors (RMS) for the two water quality indicators in Figure 3 against the test data set were 0.065 and 0.057.

Determining the model prediction results are often free parameters in the model, such as the number of BP network hidden layer neurons as well as the initial value of the weight and the strength coefficient g of the SRNN recursive layer weight. The generalization ability of the SRNN network is verified by calculating the RMS under repeated tests. Let the intensity coefficient g be equal to 0.5, 1.0 as well as 1.5 and run 10 replicates for each parameter. Each repeated experiment includes two phases of training and testing. The weight of each repeated experiment SRNN is randomly selected according to a given distribution. As shown in Figure 4(A), the mean values of the test RMS under the three intensity coefficients are less than 0.08. Their respective variances are 0.0042, 0.0001 and 0.0006. This shows that SRNN can obtain better prediction results under different weight intensity coefficients. In particular, when the intensity coefficient g is equal to 1.5, the spontaneous activity of the SRNN recursive network has chaotic characteristics [16]. But SRNN can still obtain better prediction results.

The length of the SRNN input sequence has a different impact on the prediction results. As shown in Figure 4(B), the prediction results based on the time series of the previous 7 days are significantly better than the prediction results based on the time series of the first 14 days or the first 30 days.

In addition, SRNN was used to test the three water quality indicators of permanganate index, total nitrogen and total phosphorus in water. The test results are shown in Figure 5. It is not difficult to see that SRNN's predictions for these three water quality indicators are equally accurate.

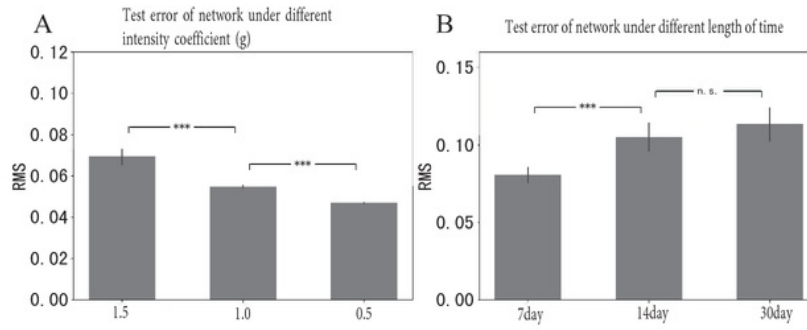


Fig. 4. Generalization for SRNN

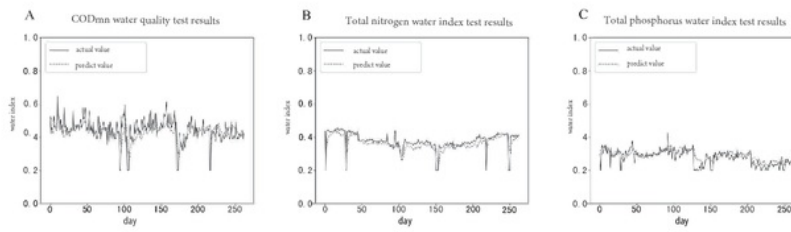


Fig. 5. Prediction results for other water quality indicators

3.3 Water quality level prediction

After successfully predicting water quality indicators [20], SRNN will be further used to predict water quality levels. According to the National Surface Water Environmental Quality Standard (GB3838-2002): the surface water quality grade (L) is divided into five grades from I to V. Class I-III water meets urban drinking water standards. In order to correspond to the five levels of water quality, the output of SRNN is modified to 5 neurons. Each neuron corresponds to a level. The five neurons with the highest rate of release are set to the output of SRNN:

$$L = \operatorname{argmax}_i [z_1, z_2, z_3, z_4, z_5] (i = 1, 2, 3, 4, 5) \quad (10)$$

When the output result $z = [0.001, 0.089, 0.2, 1.23, 0.5]^T$ and the index i of the largest element in z is 4, then the water quality level L predicted by SRNN is IV. In order to more accurately describe the relationship between the predicted level and the true level, the relative distance D between the two levels is also calculated to represent $e(t)$. The setting of $e(t)$ is shown in Table 1.

Table 1. Training error setting

D	0	1	2	3	4
$e(t)$	0	0.15	0.25	0.35	0.45

We use a total of 368 data sets with a 7-day monitoring interval from May 1, 2012 to April 30, 2014 during training process. We use a total of 200 data sets with a 7-day monitoring interval from May 1, 2014 to April 30, 2015 during testing process. Through 20 repeated experiments, the best correct rate of water level prediction was 89%, as well as the average correct rate was 85.6%. At the same time, this study also tests the SRNN forecast to reach the water quality level in the next 2 to 6 days. As shown in Figure 6, the correct rate of prediction results is above 80%.

3.4 Model comparison

The effectiveness of SRNN has been demonstrated by predicting different water quality indicators and water quality levels in a river. In the following, we will further explain that SRNN is more suitable for the prediction of water quality indicators and grades with time correlation by comparing with the prediction results of BP neural network. BP neural network model structure is a three-layer structure BP. The number of neurons in the input layer corresponds to the input length of the data. The time scale of the input data is converted together into the input of the BP network. The number of hidden layer neurons is taken as 13, and the number of neurons in the output layer is set to 1 or 5 according to the prediction task. The experiment was repeated 10 times. The comparison between the BP network and the SRNN prediction results is shown in Table 2.

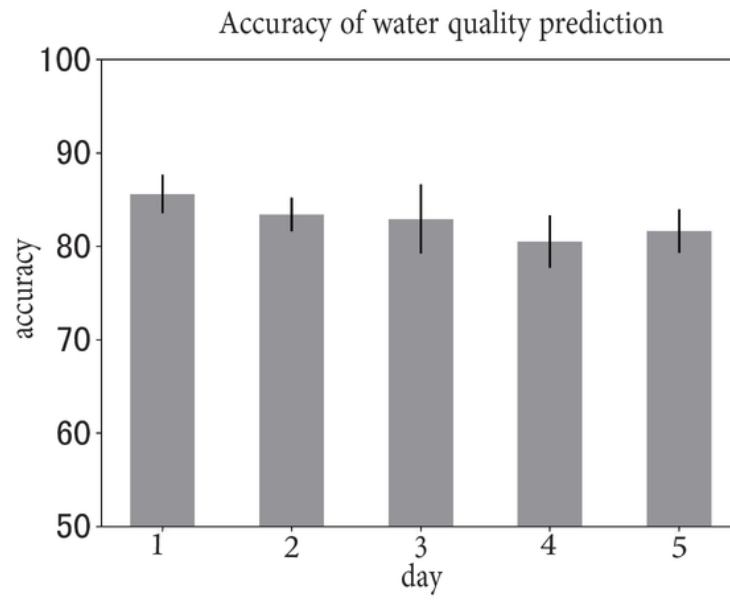


Fig. 6. Predict water quality level using SRNN

Table 2. Comparison on prediction results between BP network and SRNN network

model	RMS error value					Accuracy of next day
	AN	DO	PI	TP	TN	
SRNN	0.0342	0.0234	0.0468	0.0241	0.0244	85.6%
BP	0.066	0.1082	0.0943	0.0441	0.0662	51.75%

4 Discussion

In this study, a recurrent neural network with sparse connection features was designed to model the water quality data. The mean square recursive error algorithm was used to train the network to predict various indicators of water quality and water quality levels. The simulation results show that SRNN has better prediction ability. In particular, SRNN has few free parameters. The three weights of w^{RNL} , w^{in} , and w^{fb} only need to be randomly set according to the distribution to obtain better prediction results. This makes SRNN easier to apply to environmentally variable water quality predictions.

SRNN which is similar to Echo State Network (ESN) training only needs to adjust the weight between recursive layer and output layer. This greatly improves the operational efficiency of the recursive network. Since there is no need to adjust the connection weights between the neurons in the recursive layer during learning, the recursive layer of SRNN and ESN can be considered as a general-purpose computing unit similar to the function of the prefrontal cortex of the brain[1, 5]. Although SRNN and ESN are similar in structure, there are also essential differences between them. Firstly, SRNN's recursive layer connection weight does not require special settings. In order to achieve reverberation, ESN requires a weight matrix with a spectral radius greater than or equal to 1. Secondly, ESN training is a kind of offline learning, that is, it needs to wait for the network to pre-calculate for a period of time before adjusting the output weight. But SRNN can update the output weights on the fly based on the current input. This feature is especially important in situations where the amount of training data is insufficient.

The good predictive performance of SRNN is not only related to its structure, but also closely related to the learning algorithm it uses. It is not difficult to see from Equation 5 and 6 that the learning algorithm of SRNN is the same as the BP network error back propagation algorithm. However, compared to the error backpropagation algorithm, the learning process of SRNN can quickly make the network output close to the target output which mainly in the calculation of the matrix P . The matrix P is equivalent to the inverse of the correlation matrix in estimating the recurrence rate of the recursive layer [8]. Intuitively, SRNN's algorithm can accurately adjust the weights between the neurons and the output neurons based on the activity of the recursive layer neurons, so that the output of the output neurons quickly approaches the actual output value. In addition, SRNN has better predictive performance than BP networks commonly used for water quality prediction. Because the BP network is just a feedforward neural network, which cannot model the correlations that may exist in the input data over time. SRNN which is unlike BP networks is a recurrent neural network. The existence of the recursive layer makes it possible to establish the temporal correlation of the input data.

The prediction model proposed in this study belongs to the data-driven water quality prediction model DDM. Compared with PDM, DDM can adapt to water quality prediction under changing conditions. However, the model constructed in DDM mode is difficult to interpret from the perspective of true biochemical

reaction between water quality indicators. This makes it possible to overfit the data when applying DDM. Therefore, when applied to the prediction of water quality indicators, considering the integration of PDM into DDM is a problem that needs to be studied in the future. In addition, there are many factors affecting water quality parameters and grades, such as seasons and climate. However, this study did not add these factors to the model. Therefore, how to integrate more variables into SRNN to improve the accuracy of model prediction is a problem worthy of further study.

5 Conclusion

This study designed a recurrent neural network with sparse connection features for modeling water quality data. This study uses the mean square recursive error algorithm to train the network to predict various indicators of water quality and water quality levels. The simulation results show that the method has the characteristics of with adaptability to the model parameters and fast convergence. This method can be used to predict the future trends of water quality parameters and water quality levels of rivers and lakes. The method can play an active role in intelligent modeling of river water quality, watershed planning and pollution control.

References

1. Generating coherent patterns of activity from chaotic neural networks: Neuron
2. Bayram, A., Uzlu, E., Kankal, M., Dede, T.: Modeling stream dissolved oxygen concentration using teaching-learning based optimization algorithm. *Environmental Earth Sciences* **73**(10), 6565–6576 (2015)
3. Bei, J., Lin, Q., Zhihong, Z.: Review of water quality prediction method. *Agriculture and Technology* **36**(23), 68–69 (2016)
4. Changming, Y.: Progress of studies on water environmental mathematic models. *Chinese Journal of Environmental Engineering* (1), 74–81 (1993)
5. Cheng, Z., Deng, Z., Hu, X., Zhang, B., Yang, T.: Efficient reinforcement learning of a reservoir network model of parametric working memory achieved with a cluster population winner-take-all readout mechanism. *Journal of Neurophysiology* **114**(6), jn.00378.2015 (2015)
6. Guoli, W., Xiaofei, C., Kan, L.: Summary on application of regression analysis in water science. *China Rural Water and Hydropower* (11), 40–44 (2004)
7. Hamid, Z.A.: Evaluation of multivariate linear regression and artificial neural networks in prediction of water quality parameters. *Journal of Environmental Health Science & Engineering* **12**(1), 40–40 (2014)
8. Haykin, S.: Adaptive filter theory. forth edition (2003)
9. Hongli, F., Xiuhong, L., Qin, Y.: Neural network prediction and control model for ammonia oxidizing process under low do concentration. *China Environmental Science* **37**(1), 139–145 (2017)
10. Hongshu, C.: Analysis and discussion for the current situation of water resources on administer and water pollutions on prevention in our country. *Environmental Science Survey* **22**(s1), 66–69 (2003)

11. Huiyong, W., Peng, Y.: Wang huiyong, yan peng. Environmental Protection (4), 1-36 (2000)
12. Jaeger, H., Haas, H.: Harnessing nonlinearity: Predicting chaotic systems and saving energy in wireless communications. Science **304**(5667), 78-80 (2004)
13. Jiaquan, W., and Wu Jun, C.Z.: Stream water quality models and its development trend. Journal of Anhui Normal University(Natural Science) **27**(3), 242-247 (2004)
14. Jurui, Y., Duo, F.: The realization of water quality simulation model based on gis. Journal of Gansu Agricultural University (3), 307-309 (1999)
15. Najah, A., El-Shafie, A., El-Shafie, A.H.: Application of artificial neural networks for water quality prediction. Neural Computing & Applications **22**(1), 187-201 (2013)
16. Qing, Z., Xuelei, W., Ting, Z.: Prediction of water quality index of honghu lake based on back propagation neural network model. Wetland Science **14**(2), 212-218 (2016)
17. Shunze, W., Qing, X., Hongliang, L.: Analysis of water pollution in chinese watershed. Environmental Science & Technology (2), 1-6 (2000)
18. Tiesong, H., Peng, Y., Jin, D.: Applications of artificial neural network to hydrology and water resources. Advances in Water Science **6**(1), 76-82 (1995)
19. Ying, L., Xinzhen, Z., Jingxiang, Z.: The study on prediction modeling for river water quality. Journal of System Simulation **13**(2), 139-142 (2001)
20. Ying, Z., Qianqian, G.: Comprehensive prediction model of water quality based on grey model and fuzzy neural network. Chinese Journal of Environmental Engineering **9**(2), 537-545 (2015)
21. Yong, W.: Timing Data Mining and Its Application in Water Quality Prediction. Ph.D. thesis, Guangdong University of Technology (2005)
22. Zhaobing, S., Baoliang, W., Haifeng, J.: Water quality prediction based on probability-combination. China Environmental Science **31**(10), 1657-1662 (2011)
23. Zhen, H., Zhijiang, Y., Peipei, Q.: Drinking water quality prediction and visualization based on bayesian method. China Water & Wastewater **28**(5), 53-56 (2012)

15%

SIMILARITY INDEX

PRIMARY SOURCES

- | | | |
|---|---|-----------------|
| 1 | link.springer.com
Internet | 65 words — 1% |
| 2 | "Advances in Neural Networks - ISNN 2017", Springer Nature, 2017
Crossref | 45 words — 1% |
| 3 | "Neural Information Processing", Springer Nature, 2017
Crossref | 36 words — 1% |
| 4 | article.wateroceanscience.org
Internet | 32 words — 1% |
| 5 | "Neural Information Processing", Springer Nature, 2016
Crossref | 26 words — 1% |
| 6 | Zhang, B.. "SD-GIS-based temporal-spatial simulation of water quality in sudden water pollution accidents", Computers and Geosciences, 201107
Crossref | 26 words — 1% |
| 7 | www.growingscience.com
Internet | 25 words — < 1% |
| 8 | Md. Sumon Shahriar, Mohammad Kamruzzaman, Simon Beecham. "Multiple Resolution River flow Time Series Modelling using Machine Learning Methods", Proceedings of the MLSDA 2014 2nd Workshop on Machine Learning for Sensory Data Analysis - MLSDA'14, 2014
Crossref | 24 words — < 1% |

-
- 9 Christian, Evelyn Aramaine. "The use of COD, TOC, fluorescence, and absorbance spectroscopy to estimate biochemical oxygen demand in wastewater.", Proquest, 2015. 23 words — < 1%
ProQuest
-
- 10 "Rough Sets and Knowledge Technology", Springer Nature, 2013 23 words — < 1%
Crossref
-
- 11 Xifeng Liu, Xuefeng Yua, Kui Yu. "The Current Situation and Sustainable Development of Water Resources in China", Procedia Engineering, 2012 22 words — < 1%
Crossref
-
- 12 Ali, Sabeeh Afroz. "Azamgarh mandal ke muslim geet: samajik sandarbh.", Veer Bahadur Singh Purvanchal University, Jaunpur (India), 2018 21 words — < 1%
ProQuest
-
- 13 "Neural Information Processing", Springer Nature, 2011 19 words — < 1%
Crossref
-
- 14 Zhewei Zhang, Zhenbo Cheng, Zhongqiao Lin, Chechang Nie, Tianming Yang. "A neural network model for the orbitofrontal cortex and task space acquisition during reinforcement learning", Cold Spring Harbor Laboratory, 2017 19 words — < 1%
Crossref Posted Content
-
- 15 Song Xu, Shou Lun Chen. "A New Real Time Forecasting Model for Wind Power", Applied Mechanics and Materials, 2012 18 words — < 1%
Crossref
-
- 16 tjfeonline.com 17 words — < 1%
Internet
-
- 17 Yaoyao He, Qifa Xu, Jinhong Wan, Shanlin Yang. "Short-term power load probability density forecasting based on quantile regression neural network and 17 words — < 1%

-
- 18 www.freepatentsonline.com 17 words — < 1%
Internet
-
- 19 es.scribd.com 17 words — < 1%
Internet
-
- 20 "Prediction of Water Quality of Huangpu River Using a Tidal River Network Model", Environmental Engineering Science, 12/2008 16 words — < 1%
Crossref
-
- 21 Boyue Zheng, Guohe Huang, Lirong Liu, Mengyu Zhai, Yuru Guan. "Metabolism of urban wastewater: Ecological network analysis for Guangdong Province, China", Journal of Cleaner Production, 2019 16 words — < 1%
Crossref
-
- 22 www.amarsi-project.eu 16 words — < 1%
Internet
-
- 23 oriprobe.com 15 words — < 1%
Internet
-
- 24 en.cnki.com.cn 14 words — < 1%
Internet
-
- 25 Su, Dandan, Guangsheng Liu, Guangda Gao, Jiawei Liu, and Yingchen Meng. "Design and Implementation of Drainage Network Extraction Algorithm Based on Binary Linear Regression", Journal of Computers, 2013. 14 words — < 1%
Crossref
-
- 26 Wu, ChungMin, ShengChun Chou, and HorngTwu Liaw. "A trend based investment decision approach using clustering and heuristic algorithm", Science China Information Sciences, 2014. 13 words — < 1%
Crossref

-
- 27 "Advances in Neural Networks – ISNN 2011", Springer Nature, 2011 13 words — < 1%
Crossref
-
- 28 Heddam, Salim. "Simultaneous modelling and forecasting of hourly dissolved oxygen concentration (DO) using radial basis function neural network (RBFNN) based approach: a case study from the Klamath River, Oregon, USA", Modeling Earth Systems and Environment, 2016. 12 words — < 1%
Crossref
-
- 29 jn.physiology.org 10 words — < 1%
Internet
-
- 30 Zhewei Zhang, Zhenbo Cheng, Zhongqiao Lin, Chechang Nie, Tianming Yang. "A neural network model for the orbitofrontal cortex and task space acquisition during reinforcement learning", PLOS Computational Biology, 2018 10 words — < 1%
Crossref
-
- 31 Yong He, Yun Zhang, Shujuan Zhang, Hui Fang. "Application of Artificial Neural Network on Relationship Analysis between Wheat Yield and Soil Nutrients", 2005 IEEE Engineering in Medicine and Biology 27th Annual Conference, 2005 10 words — < 1%
Crossref
-
- 32 google.com 10 words — < 1%
Internet
-
- 33 www.scirp.org 10 words — < 1%
Internet
-
- 34 G. Hessel, W. Schmitt, K. Van Der Vorst, F.-P. Weiss. "A neutral network approach for acoustic leak monitoring in the VVER-440 pressure vessel head", Progress in Nuclear Energy, 1999 9 words — < 1%
Crossref
-
- 35 english.mee.gov.cn 9 words — < 1%
Internet

36	itise.ugr.es Internet	9 words — < 1%
37	"Intelligence Systems in Environmental Management: Theory and Applications", Springer Nature, 2017 Crossref	9 words — < 1%
38	www.teco.edu Internet	9 words — < 1%
39	www26.us.archive.org Internet	9 words — < 1%
40	www.foxrivergroup.org Internet	9 words — < 1%
41	Lecture Notes in Computer Science, 2012. Crossref	8 words — < 1%
42	José Vanderlei Martins, Paulo Artaxo, Epaminondas S.B. Ferraz, Manfredo H. Tabacniks. "Chronological studies of tree-rings from the Amazon Basin using thick target PIXE and proton backscattering analysis", Nuclear Instruments and Methods in Physics Research Section B: Beam Interactions with Materials and Atoms, 1999 Crossref	8 words — < 1%
43	Zhongwu Li. "Temporal and spatial characteristics of surface water quality by an improved universal pollution index in red soil hilly region of South China: a case study in Liuyanghe River watershed", Environmental Geology, 08/05/2008 Crossref	8 words — < 1%
44	Ju, Q.. "Division-based rainfall-runoff simulations with BP neural networks and Xinanjiang model", Neurocomputing, 200908 Crossref	8 words — < 1%
45	"Computational Intelligence in Data Mining", Springer Nature,	

46

Yang, Y. Jeffrey, Roy C. Haught, John Hall, Jeff Szabo, Robert M. Clark, and Greg Meiners.
"Adaptive Water Sensor Signal Processing: Experimental Results and Implications for Online Contaminant Warning Systems",
World Environmental and Water Resources Congress 2007,
2007.

Crossref

8 words — < 1%