



SINGLE DIRECTIONAL PLATE BACK BRACE
ISOMETRIC VIEW
CONCRETE

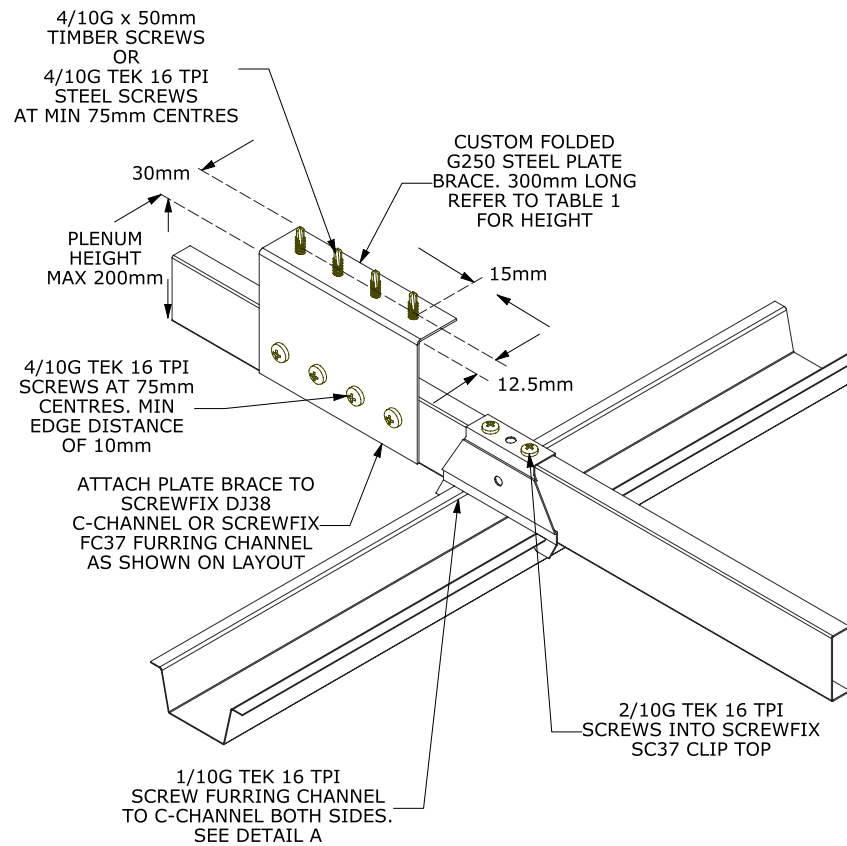

SINGLE DIRECTIONAL PLATE BACK BRACE
ISOMETRIC VIEW
TIMBER/STEEL

1/10G TEK 16 TPI
SCREW FURRING CHANNEL
TO C-CHANNEL BOTH SIDES

SCREWS REQUIRED AT
SC37 CLIP CLOSEST TO
PLATE BRACE ONLY



DETAIL A - SIDE VIEW SC37 CLIP

TABLE 1 - PLENUM HEIGHT SPECIFICATION

PLENUM HEIGHT (mm)	PLATE BRACE GAUGE
0-100	MIN. 0.75BMT (300mm LONG)
100-150	MIN. 1.15BMT (300mm LONG)
100-200	MIN. 1.50BMT (300mm LONG)
200+	PLATE BRACE NOT PERMITTED

NOTES:

1. INSTALL ANCHORS AS PER MANUFACTURER'S SPEC
2. REPRESENTATIVE ONLY. SEE BREVITY FOR DETAILS
3. ANY CHANGES ON SITE TO BE APPROVED BY BREVITY

DESIGNER:

Brevity

Victoria Park Market,
Unit 72B,
210 Victoria Street West
Auckland 1010

+64 9 216 7104
www.teambrevity.com

Tolerances (unless specified)	1-100	<1000	>1000
	± 2	± 10	± 70



Rev	Description
A	FOR CONSENT

Designed	BREVITY LTD	16/01/23
Drawn	BREVITY LTD	16/01/23

**SINGLE DIRECTIONAL
BACK BRACE
SPECIFICATION DRAWING**

Scale: Do not Scale

DRG No. 050-32D Sheet 1 OF 1