


CONNECTION B ISOMETRIC VIEW

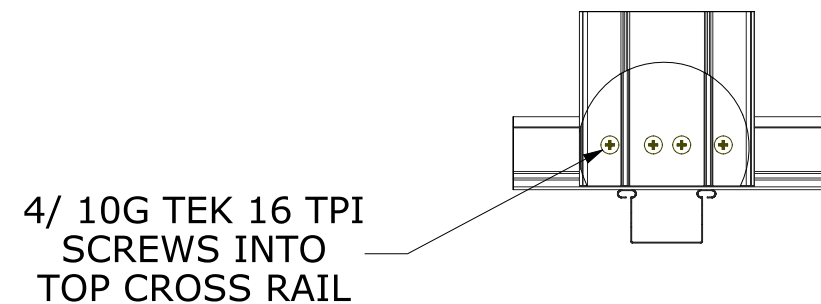

CONNECTION B REAR VIEW

PURLIN TYPE	CONNECTIONS
STEEL MIN. 1.3mm	8/ 14G TEK 10 TPI
TIMBER MIN. 45mm	8/ 14G TEK 10 TPI MIN. EMBEDMENT 45mm

- NOTES:
1. INSTALL STUDS AS PER MANUFACTURER'S SPEC
 2. INSTALL ANCHORS AS PER MANUFACTURER'S SPEC
 3. WHERE BOXED STUDS ARE USED INSTALL AS PER MANUFACTURER'S SPEC
 4. SCREWED CONNECTION MIN SPACING AS SHOWN
 5. REPRESENTATIVE ONLY. SEE BREVITY SPEC FOR DETAILS
 6. ANY CHANGES ON SITE TO BE APPROVED BY BREVITY

DESIGNER:


Brevity

Victoria Park Market,
Unit 72B,
210 Victoria Street West
Auckland 1010

+64 9 216 7104
www.teambrevity.com

Tolerances (unless specified)	1-100	<1000	>1000
	± 2	± 10	± 70

All dim. in mm



Rev	Description		
A	FOR CONSENT		
Designed	BREVITY LTD	16/01/23	
Drawn	BREVITY LTD	16/01/23	
Approved	BREVITY LTD	16/01/23	

BACK BRACE SPECIFICATION DRAWING

Scale Do not Scale

DRG No. 050-31G 1 OF 1