


ANGLE SUSPENSION FOR CONNECTING TO SIDE OF UPPER STRUCTURAL MEMBER

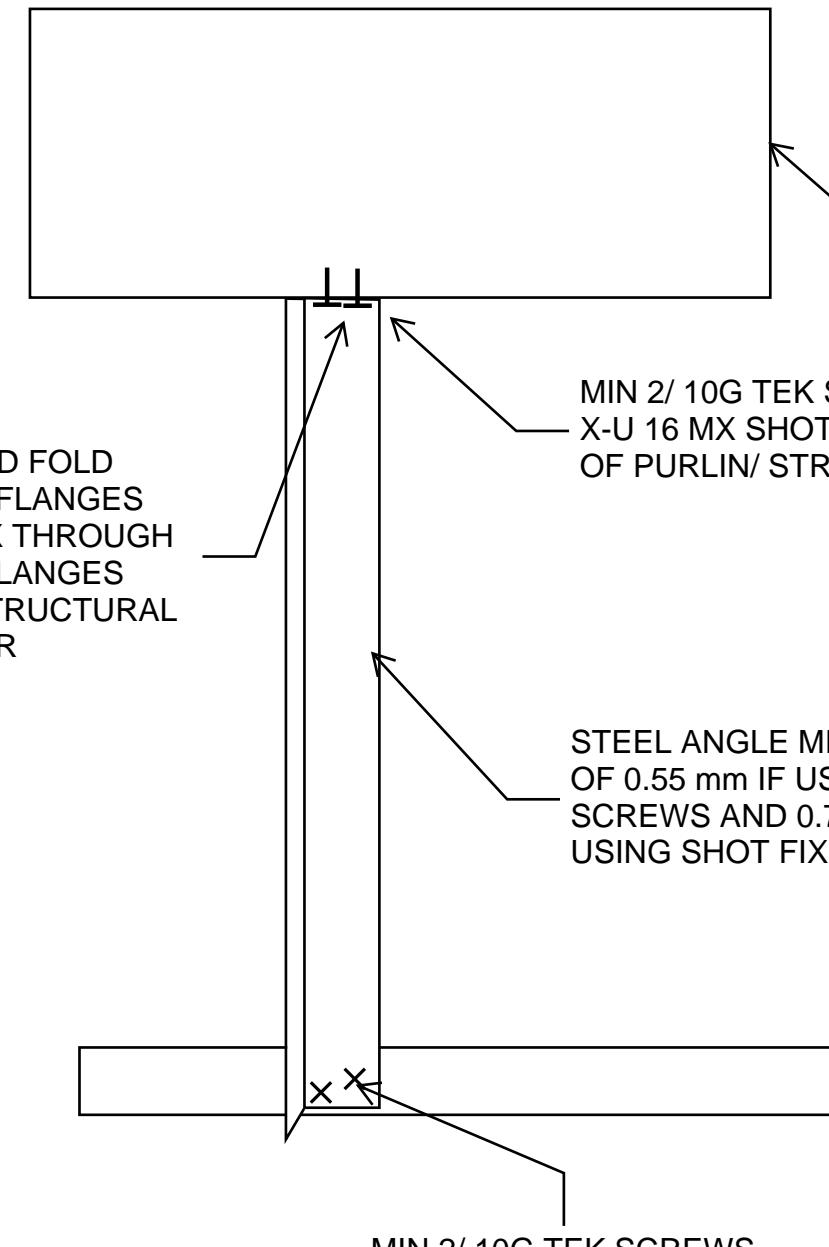

ANGLE SUSPENSION FOR CONNECTING TO UNDERSIDE OF UPPER STRUCTURAL MEMBER

NOTES:

1. 10G TEK SCREWS TO HAVE MIN SPACING AND EDGE DISTANCE OF 15 mm
2. HILTI X-U 16 MX FIXINGS TO HAVE MIN SPACING OF 25 mm AND MIN EDGE DISTANCE OF 13 mm
3. 0.75 mm BMT REQUIRED FOR USING SHOT FIXINGS
4. STRUCTURAL STEEL MUST BE MIN G300 GRADE AND MIN 6 mm THICKNESS
5. ANY CHANGES ON SITE TO BE APPROVED BY BREVITY


DESIGNER:

Brevity

Victoria Park Market,
Unit 72B,
210 Victoria Street West
Auckland 1010

+64 9 216 7104
www.teambrevity.com

Tolerances (unless specified)	1-100	<1000	>1000
	± 2	± 10	± 70



Rev	Description
A	FOR INFORMATION

Designed	BREVITY LTD	16/01/23
Drawn	BREVITY LTD	16/01/23
Approved	BREVITY LTD	16/01/23

ANGLE SUSPENSION DETAIL FOR SUSPENDED CEILINGS

Scale Do not Scale