


**TOP CROSS RAIL
SEISMIC GAP**

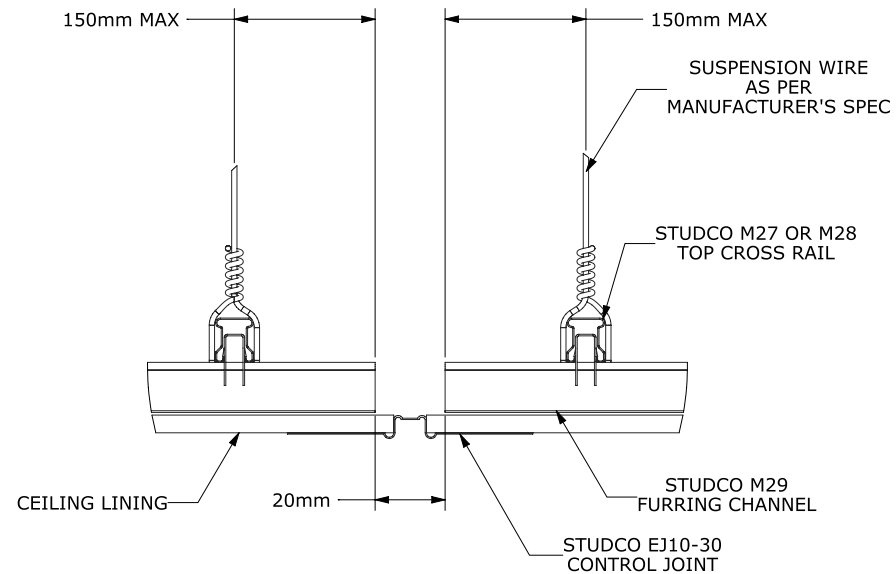

**FURRING CHANNEL
SEISMIC GAP**

- NOTES:
1. SUSPENSION WIRE PLACEMENT TO BE IN ACCORDANCE WITH GRID MANUFACTURER'S SPEC
 2. INSTALL ANCHORS IN ACCORDANCE WITH MANUFACTURER'S SPEC
 3. REPRESENTATIVE ONLY. SEE BREVITY FOR DETAILS
 4. ANY CHANGES ON SITE TO BE APPROVED BY BREVITY
 5. ACOUSTICS & FIRE PERIMETER GAP DESIGN REQUIREMENTS TO BE CONFIRMED BY OTHERS
 6. SEISMIC GAP DETAIL ONLY ACCEPTABLE FOR +/- 19mm MOVEMENT. FOR LARGER GAPS CONTACT BREVITY

DESIGNER:


Brevity

Victoria Park Market,
Unit 72B,
210 Victoria Street West
Auckland 1010

+64 9 216 7104
www.teambrevity.com

Tolerances (unless specified)	1-100	<1000	>1000
	± 2	± 10	± 70

All dim.
in mm



Rev	Description
A	FOR CONSENT

Designed	BREVITY LTD	16/01/23
Drawn	BREVITY LTD	16/01/23

**STUDCO
SEISMIC GAP**

Scale
Do not Scale

DRG No. 050-12C Sheet 1 OF 1