




NAME	DATE	TIME (HRS)

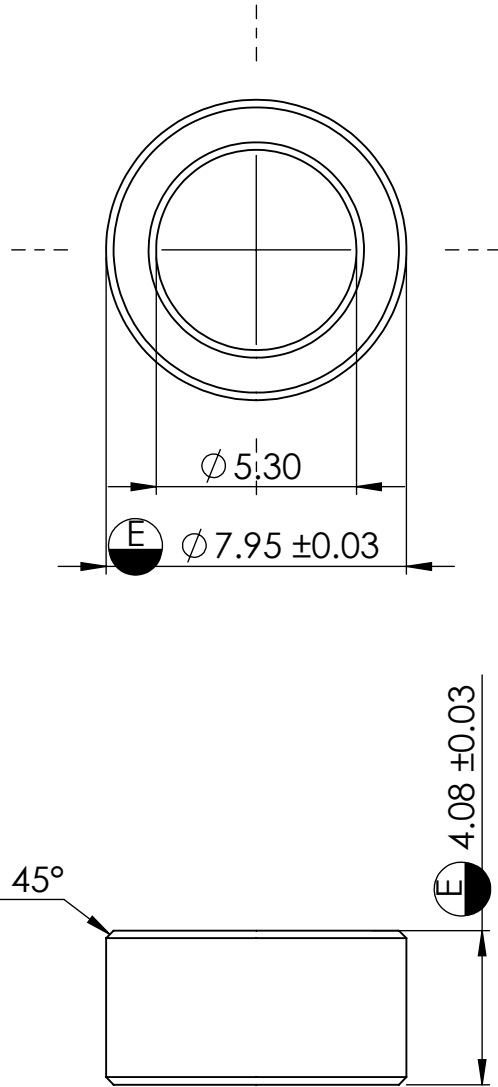

QUALITY	
AUTHORIZE	TALLER

NOTES: Pieza libre de filos y rebabas.		TOTAL OF PIECES	4 Pza.	UNLESS OTHERWISE SPECIFIED		
		ANG. PRO		TOLERANCES DIMENSIONS	ISO 2768-1 mK-E ASME Y14.5M-1994	
				MM +0.1 -0.1	INCHES +0.004 -0.004	ANGLES +1° -1°
				MATERIAL:	4140T Steel	
				SURFACE TREATMENT:	Electroless Nickel	
				HARDNESS:	N.A.	
REV	DESCRIPTION	DATE	APPROVED	REVIEWS		

<div></div>		PAG. 1 de 1		ALL TECHNICAL DATA DISCLOSED HERE IN IS THE PROPERTY OF JOYSON SAFETY SYSTEMS AND SHALL NOT BE USED BY ANY OTHER MANUFACTURER, PROCUREMENT OR DISCLOSURE WITHOUT WRITTEN PERMISSION OF THE OWNMER.			
<div><div><div></div></div><div>MEDIDA ESPECIAL</div></div>							
<div><div><div></div></div><div>JOYSON SAFETY SYSTEMS</div></div>		<div>JOYSON TECHNICAL CENTER</div>					
		<div>MODEL NAME:</div>			<div>SERIES No</div>		
		<div>MACHINE NAME:</div>					
<div>APPROVALS</div>		<div>DATE</div>					
<div>DESIGNER</div>		<div>LGG</div>		<div>11/01/2022</div>			
		<div>PART NUMBER:</div>			<div>CARB01-AC-100-007</div>		
		<div>SIZE</div>	<div>PART NAME</div>			<div>REV.</div>	
		<div>A</div>	<div>Cartridge Locking Bushing</div>			<div>A</div>	
<div>REVIEW</div>		<div>RVM</div>		<div>11/01/2022</div>			
		<div>ESCALE</div>	<div>5:1</div>	<div>DRAWING IN</div>		<div>MILLIMETERS</div>	