


(4) 9/32 DRILL THRU &
C'SINK 17/32 D X 82° INCL. ANGLE

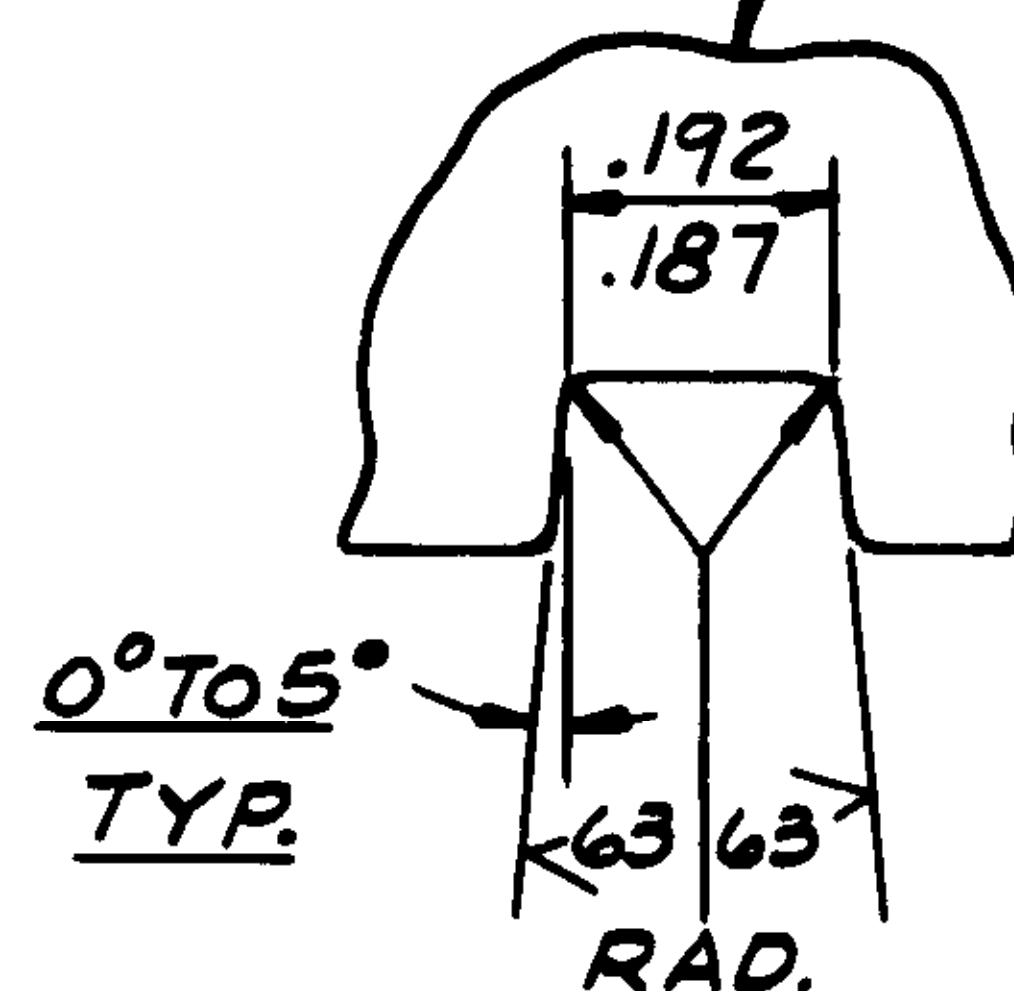

ENLARGED VIEW OF
O-RING GROOVE

DECIMAL DIAMETERS MUST
BE CONCENTRIC WITHIN
.001 T.I. RDG.

NW-0308 IND. 46
USED ON ASSEMBLY NO.

"INFORMATION CONTAINED HEREIN CONSTITUTES
PROPRIETARY CONFIDENTIAL INFORMATION OF
OWENS-ILLINOIS, AND IS ACCEPTED ONLY SUBJECT TO
THAT UNDERSTANDING, IT IS TO BE KEPT
CONFIDENTIAL AND NOT COPIED, USED, OR CONVEYED
TO OTHERS WITHOUT OWENS-ILLINOIS' WRITTEN
AUTHORIZATION."

N		I		D	
M		H		C	
L		G		B	
K		F		A	
J		E			CHANGES

UNLESS SPECIFIED: 125 ✓
FINISHED SURFACE ROUGHNESS
FINISHED DIMENSIONS - FRACTIONAL ± .015
DECIMAL ± .005
BREAK SHARP EDGES MARK PART NUMBER AT (X)

NAME SLEEVE
DRAWN RED CHECKED ULM DATE 9-27-78 SCALE 1 TO 1
MATERIAL M-1020 H.R. STEEL

OWENS-ILLINOIS
DRAWING NUMBER

NW-4892
SHEET