



3X \varnothing 4.20 THRU —
M5X0.8 - 6H THRU
EQUALLY SPACED
ON A \varnothing 33 B.C.

Ø 33±.1 B.C.




DIMENSIONING AND TOLERANCING PER ASME Y14.5-2009 AND LIBBEY CORPORATE STANDARDS


INFORMATION CONTAINED HEREIN CONSTITUTES PROPRIETARY CONFIDENTIAL INFORMATION OF LIBBEY, INC. AND IS TO BE ACCEPTED ONLY SUBJECT TO THAT UNDERSTANDING. IT IS TO BE KEPT CONFIDENTIAL AND NOT TO BE COPIED, USED, OR CONVEYED TO OTHERS WITHOUT THE EXPRESSED WRITTEN CONSENT OF LIBBEY, INC.

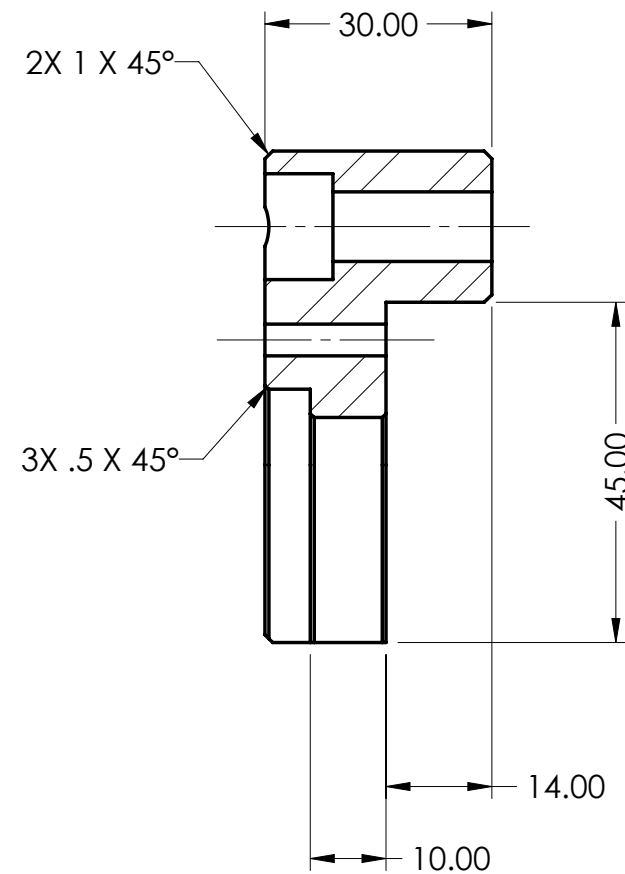

SECTION A-A

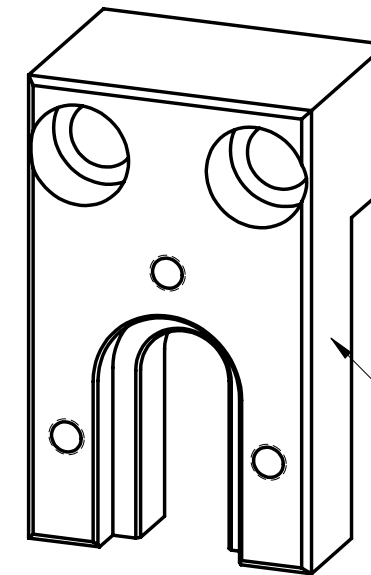

—MARK PART NUMBER HERE

REV.	DESCRIPTION	BY	DATE
REVISIONS			
<div>NT.</div> <div>:</div> <div> <p>MATERIAL</p> <p>AISI 1040 STEEL, UNS G10400</p> </div>			
DESIGN	D.SOLEY	SAVED	6/1/2022
DRAWN	D.SOLEY	05/25/2022	
<div> <div>  <div> <p>LIBBEY®</p> <p>CORPORATE OFFICES TOLEDO, OHIO WWW.LIBBEY.COM</p> </div> </div> </div>			
L-BRACKET			
X-Y-THETA ADJUSTER			
SCALE:	SIZE	DRAWING NUMBER	
1:1	B	LY-8849	
		SHEET 1 OF 1	

[illegible]