


General Dimension Tolerance				
0 ~ 4	± 0.1	16 ~ 63	± 0.3	
4 ~ 16	± 0.2	63 ~	± 0.5	

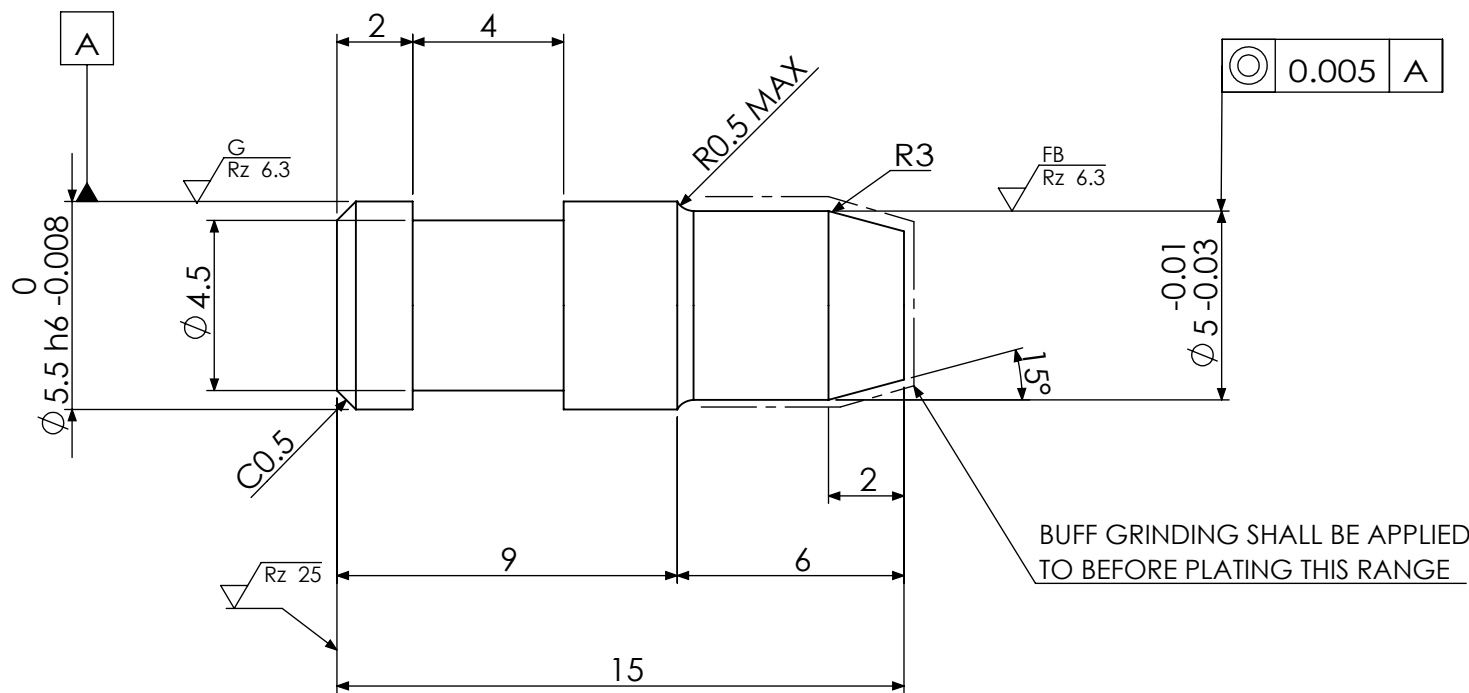

$\sqrt{Rz 100}$ ($\sqrt{Rz 25}$ $\sqrt{Rz 6.3}$ $\sqrt{FB Rz 6.3}$)

NOTE: ALL EDGES MUST BE C0.5 UNLESS OTHERWISE SPECIFIED

SURFACE TREATMENT					HEAT TREATMENT		WEIGHT	
MICr-20 ±4μm					HRC: 61-63			
ALL PART					VQT			
MATERIAL:					RESEMBLANCE PART No.			I/O CODE
SKD11 (ASTM A681 D2)								
PART NAME					GUIDE PIN			
DENSO MEXICO					DWG NO.		ASP CODE	SHEET
					PB-TM-08-1093-34-006		A2	1 OF 1
APPROVED	CHECKED	CHECKED	DESIGNED	DRAWN	QTY.: 3			No.: 6
					SCALE:10:1			