



General Dimension Tolerance				
0 ~ 4	± 0.1	16 ~ 63	± 0.3	
4 ~ 16	± 0.2	63 ~	± 0.5	

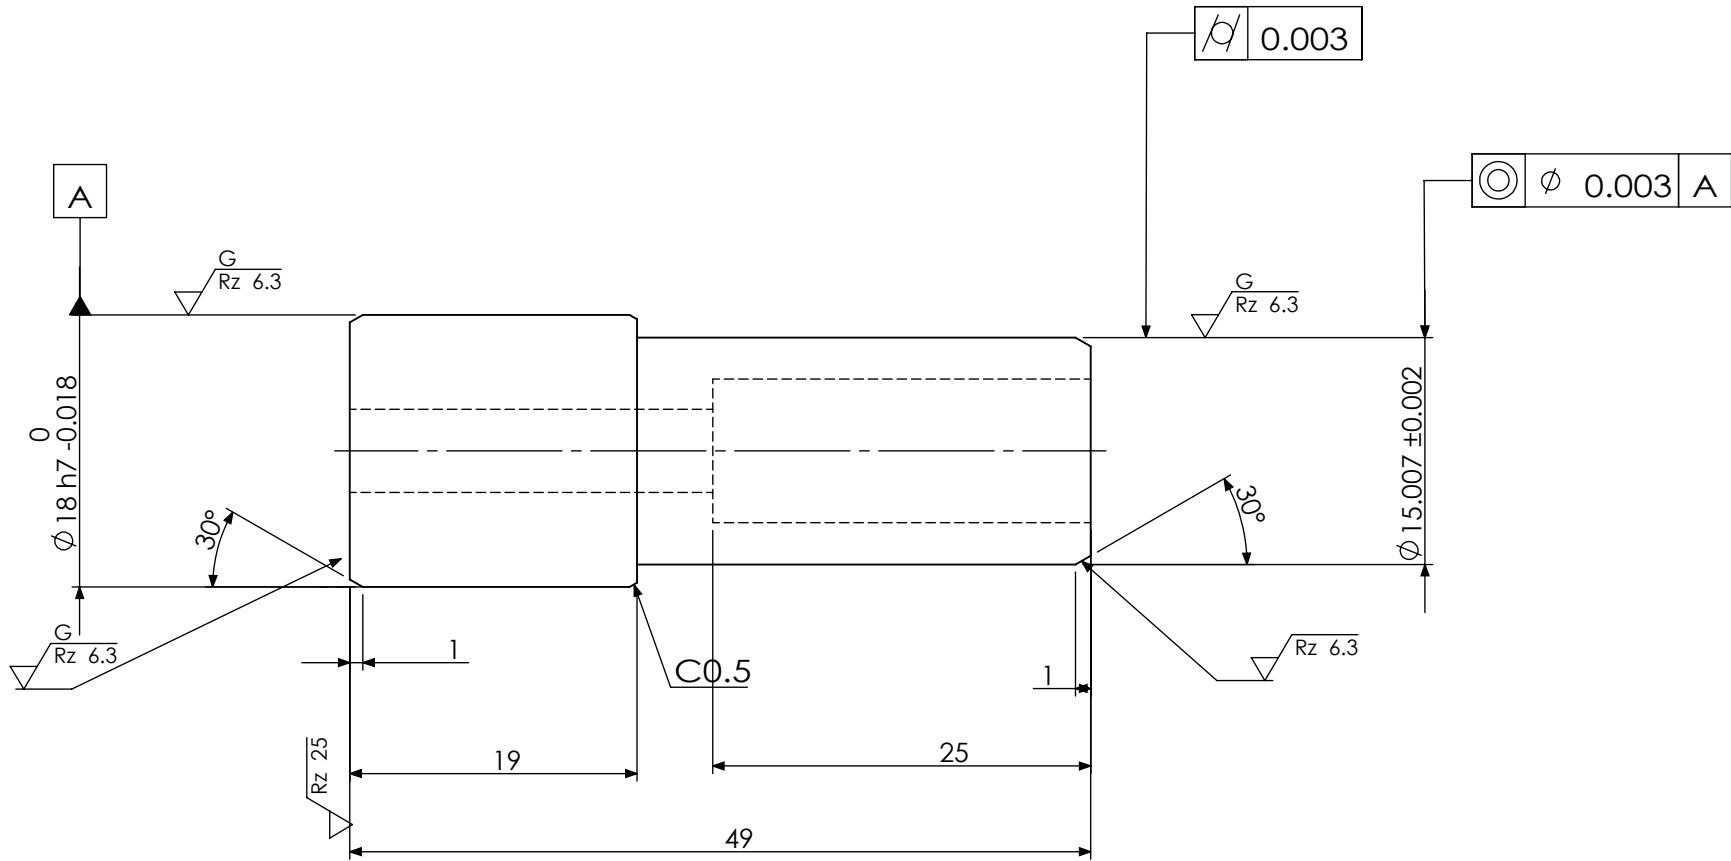

$\phi 5.5$ DRILL THRU,
 $\phi 9.5$ C-BORE, DEEP 25

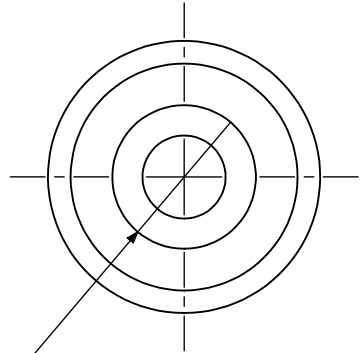

NOTE: ALL EDGES MUST BE C0.5 UNLESS OTHERWISE SPECIFIED

$\sqrt{Rz 100}$ ($\sqrt{Rz 25}$, $\sqrt{Rz 6.3}$)

SURFACE TREATMENT					HEAT TREATMENT					WEIGHT	
MICr-20 $\pm 4\mu\text{m}$					HRC: 57-64						
ALL PART					QT						
MATERIAL:					RESEMBLANCE PART No.					IMPO CODE	I/O CODE
SK 105											
PART NAME					WORKGUIDE						
DENSO MEXICO					DWG NO. M-4017230-030					A2	ASP CODE
APPROVED	CHECKED	CHECKED	DESIGNED	DRAWN	QTY.: 1					No.: 3	
										SCALE:2:1	