




| NAME | DATE | TIME (HRS) |
|------|------|------------|
| | | |
| | | |
| | | |
| | | |

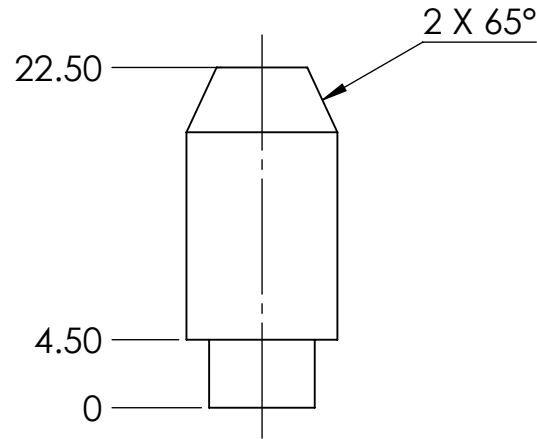

Ø 4.20 THRU ALL
M5x0.8 - 6H THRU ALL

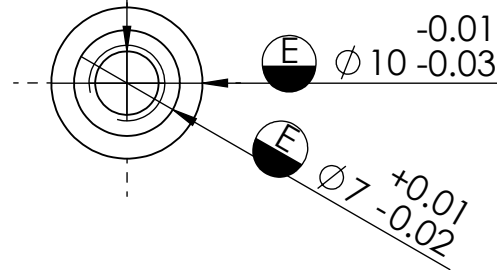

QUALITY



TALLER

NOTES:
Pieza libre de filos y rebabas.

TOTAL OF
PIECES 2 Pza.

UNLESS OTHERWISE SPECIFIED

TOLERANCES ISO 2768-1 mK-E
DIMENSIONS ASME Y14.5M-1994

MM INCHES ANGLES
+1 -1 +.004 -.004 +1° -1°

MATERIAL: SS304

SURFACE
TREATMENT: Pulido

HARDNESS: N.A.

REV DESCRIPTION DATE APPROVED

REVIEWS

PAG. 1 de 1

MEDIDA ESPECIAL



APPROVALS
DESIGNER LGGV 05/01/2022

REVIEW RVM 05/01/2022

ALL TECHNICAL DATA DISCLOSED HERE IN IS THE PROPERTY OF
JOYSON SAFETY SYSTEMS AND SHALL NOT BE USED BY ANY OTHER
MANUFACTURER, PROCUREMENT OR DISCLOSURE WITHOUT WRITTEN
PERMISSION OF THE OWNER.

JOYSON TECHNICAL CENTER

MODEL NAME: CART016-TRN SERIES No M2021-159

MACHINE NAME: LID.CARTRIDGE FARISIDE LUCID LH

PART NUMBER: CART016-TRN-100-004

SIZE PART NAME
A Cartridge Locking Pin

ESCALE 2:1 DRAWING IN MILLIMETERS

JSSAM-JTC-MF-FM-0002