

| ıce | ±0.3 | ±0.5 |
|-----------------|---------|-------|
| nsion Tolerance | 16 ~ 63 | 63 ~ |
| ral Dimension | ±0.1 | ± 0.2 |
| General | 0 ~ 4 | 4~16 |



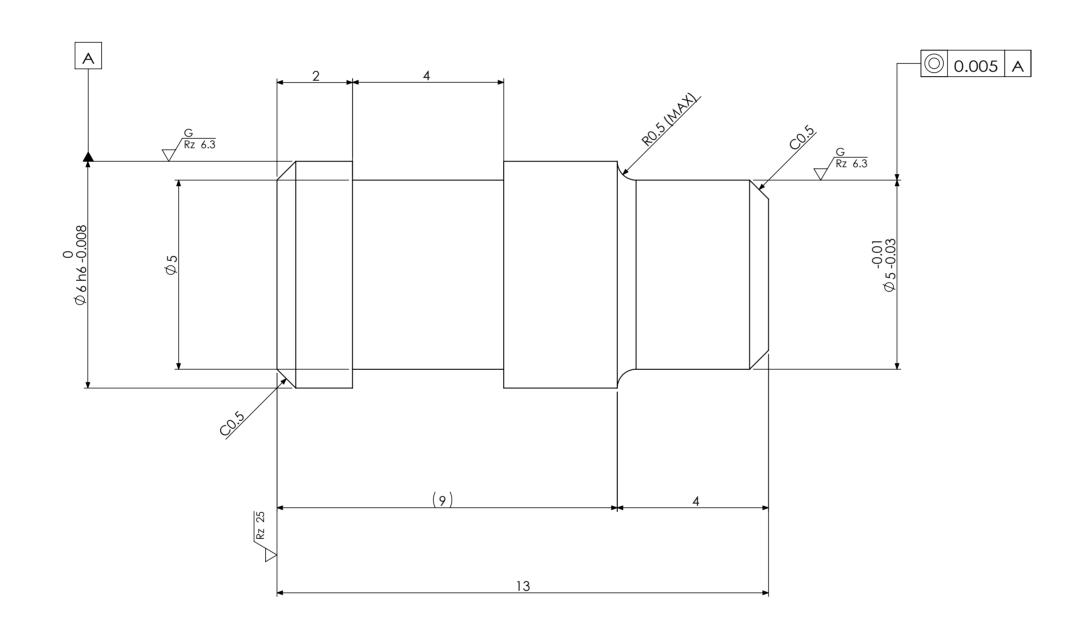

| NOTE: DIMENSION AFTER PLATING | $\sqrt{\frac{Rz \ 100}{\sqrt{\frac{Rz \ 25}{\sqrt{\frac{G}{Rz \ 6.3}}}}}$ | | |
|------------------------------------------------------------|---------------------------------------------------------------------------|--------------|--------------------|
| SURFACE TREATMENT | HEAT TREATMENT | WEIGHT | |
| MICr-20 +/- 4 µm ALL PART MATERIAL: SKD11 (ASTM A681 D2) | HRC 61~63 QT resemblance part no. | IMPO CODE | I I I/O CODE |
| PART NAME GUIDE PIN | PB-TM-08-1093-25-008 | A2 ASP CODE | SHEET 1 OF 1 |
| JULIO QTY | r.: 3 No | .: 8 | SCALE:10:1 |