


A 2x2 matrix diagram. The vertical axis is labeled 'QUALITY' in the center. The horizontal axis has two labels: 'AUTHORIZE' on the left and 'TALLER' on the right. The matrix is divided into four quadrants by a horizontal line and a vertical line.

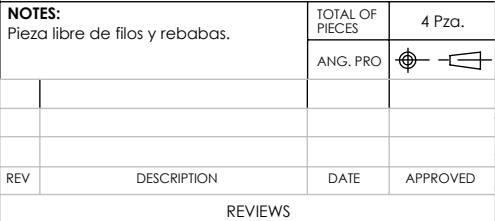

UNLESS OTHERWISE SPECIFIED		
TOLERANCES DIMENSIONS	ISO 2768-1 mK-E ASME Y14.5M-1994	
MM +1 -.1	INCHES +.004 -.004	ANGLES +1 °-1 °
MATERIAL:	ALUMINIO	
SURFACE TREATMENT:	PULIDO	
HARDNESS:		

		PAG. 1 de 1	
 MEDIDA ESPECIAL			
 JOYSON SAFETY SYSTEMS			
APPROVALS		DATE	
DESIGNER	RSMV	20/07/21	
REVIEW	JATA	20/07/21	

<p>ALL TECHNICAL DATA DISCLOSED HERE IN IS THE PROPERTY OF JOYSON SAFETY SYSTEMS AND SHALL NOT BE USED BY ANY OTHER MANUFACTURER, PROCUREMENT OR DISCLOSURE WITHOUT WRITTEN PERMISSION OF THE OWNMR.</p>				
<p>JOYSON TECHNICAL CENTER</p>				
MODEL NAME:		CLCQST001-P2	SERIES No	M2022-000
MACHINE NAME:		ENSAMBLE DE BRACKET CLCQST		
PART NUMBER:		CLCQST001-P2-108		
SIZE	PART NAME			REV.
A	PART 108			A
ESCALE	1:2	DRAWING IN	INCHES	