

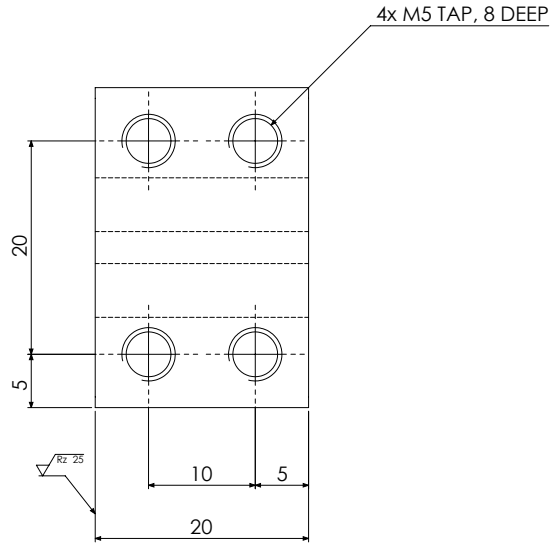


General Dimension Tolerance			
0 ~ 4	±0.1	16 ~ 63	±0.3
4 ~ 16	±0.2	63 ~	±0.5

BUFF GRINDING SHALL BE APPLIED
TO BEFORE PLATING

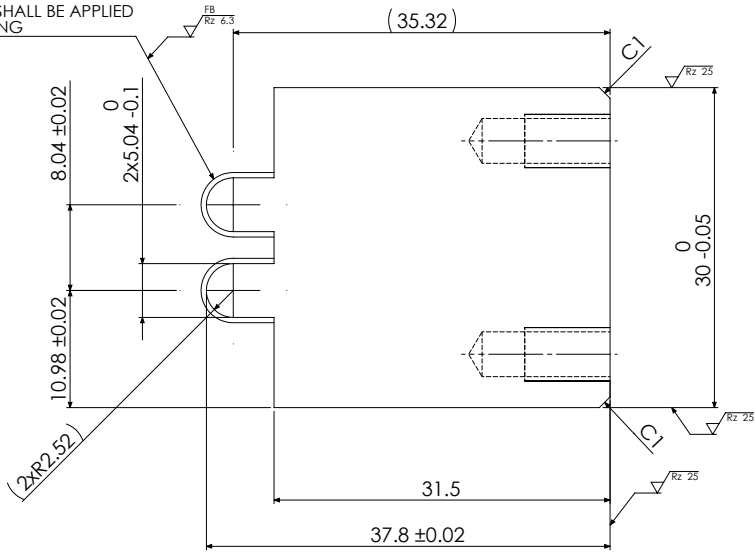

$\sqrt{Rz\ 100}$ ($\sqrt{Rz\ 25}$ $\sqrt{FB\ Rz\ 6.3}$)

NOTE: ALL EDGES MUST BE C0.5 UNLESS OTHERWISE SPECIFIED

SURFACE TREATMENT					HEAT TREATMENT		WEIGHT	
MICr-20 ± 4µm					HRC61-63			
ALL PART					VQT			
MATERIAL:					RESEMBLANCE PART NO.		SMO CODE	UO CODE
SKD11 (ASTM A681 D2)								
PART NAME					PAWL			
DENSO MEXICO					DWG NO.		APP CODE	SHEET
					PB-TM-08-1093-44-010		A2	1 OF 1
APPROVED	CHECKED	CHECKED	DESIGNED	DRAWN	QTY.: 1		No.: 10	
							SCALE: 2:1	

CONFIDENTIAL