

| General | ral Dim | Dimension | Tolerance | ce |
|---------|---------|-----------|-----------|-------|
| 0 ~ 4 | ± 0.1 | 16 ~ 63 | 63 | ± 0.3 |
| 4~16 | ± 0.2 | ~ 69 | , | ±0.5 |
| | | | | |
| | | | | |

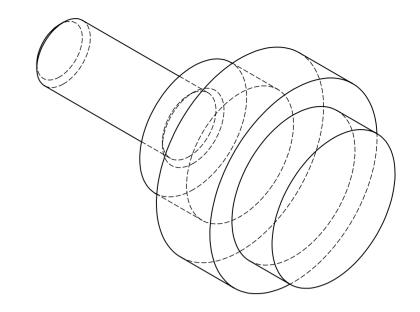

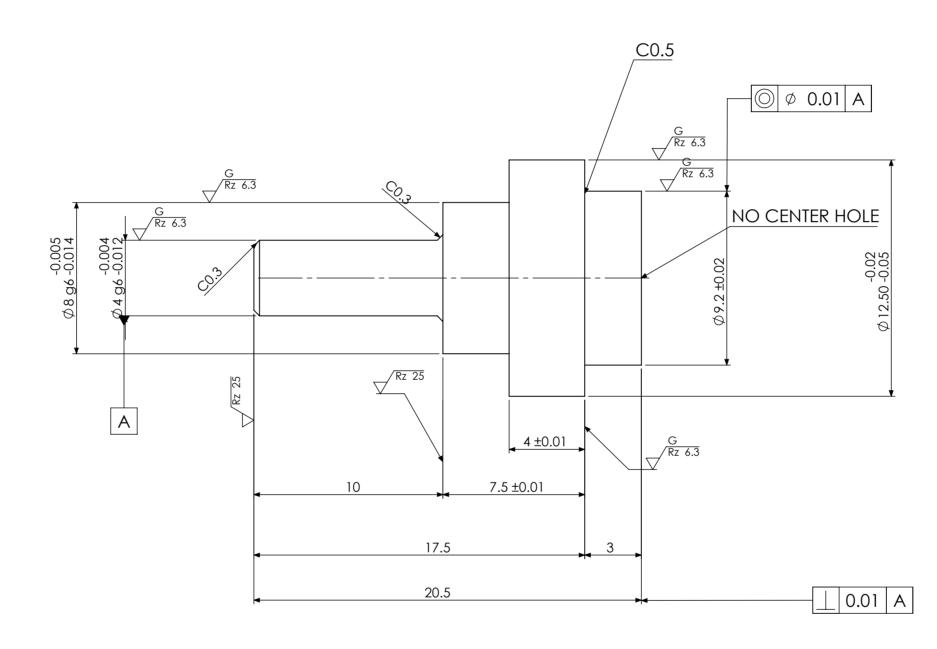

 $\sqrt{\frac{Rz \ 100}{Rz \ 25}}$ ($\sqrt{\frac{Rz \ 25}{Rz \ 6.3}}$)

NOTE: ALL EDGES MUST BE CO.3 UNLESS OTHERWISE SPECIFIED

| SURFACE TREATMENT | HEAT TREATMENT | WEIGHT | | | |
|---------------------------------------|----------------------|---|--|--|--|
| MICr-20 +/- 4 μm | HRC 57~6 | 54 | | | |
| ALL PART | QT | | | | |
| MATERIAL: | RESEMBLANCE PART NO. | | | | |
| SKD11 (ASTM A681 D2) | | | | | |
| PIN (TNGA 2.4L INT/TNGA 2.4L EXH) | | | | | |
| DENSO MEXICO | M-2815387-38 | 30 A2 CODE 1 OF 1 | | | |
| APPROVED CHECKED CHECKED DESIGNED DR. | WN | ,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,, | | | |
| JULI SERI | QTY.: 1 | No.: 38 SCALE:5:1 | | | |

CONFIDENTIAL