
)ce	± 0.3	±0.5	
Dimension Tolerance	16 ~ 63	63 ~	
ral Dime	± 0.1	± 0.2	
General	0 ~ 4	4~16	

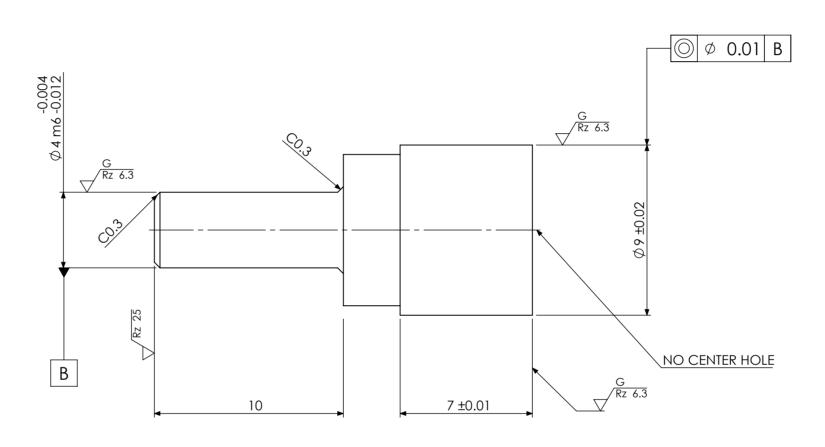

 $\sqrt{\frac{Rz \ 100}{Rz \ 100}}$  (  $\sqrt{\frac{Rz \ 25}{Rz \ 6.3}}$  )

SURFACE TREATMENT				HEAT TREATMENT															
MI	MICr-20 +/- 4 μm				HRC 57~64														
	ALL F						C	T							-				
						Ш							1			_			
MATERIAL:					RESEMBI	ANCE F	PART N	lo.									MPO CODE	I/C CO	
SKD1	SKD11 (ASTM A681 D2)				I		ı	ı	ı	ı		ı	I	I					
PART NAME		TU	BE																
DENSO MEXIC				DWG NO											$\vdash$	1	ASP	SH	EET
APPROVED CHECKED	CHECKED	DESIGNED	DRAWN		1	M- 	10	59	91	3-	38	30	ı	ı	A2	2	CODE	10	OF 1
			JULIO SERRATO	QTY	<b>'.:</b> 1	•		•	•	•	•	•	1	٧c	).: 3	38		SCA	LE:5:1

CONFIDENTIAL