

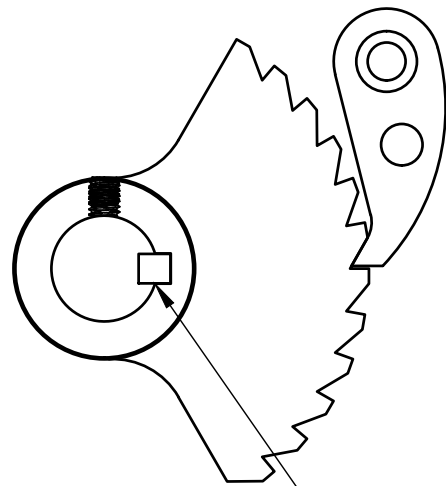



Dept. KogEtho	Technical reference	Created by Louis Frank	2022-01-18	Approved by
		Document type	Document status	
		Title Hebel_Assembly	DWG No.	
		Rev. 5	Date of issue 2022-02-11	Sheet 1/3




The key must be flush with the ratchet wheel on the inner side.

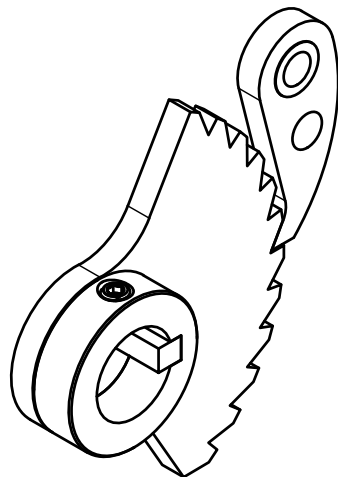

B

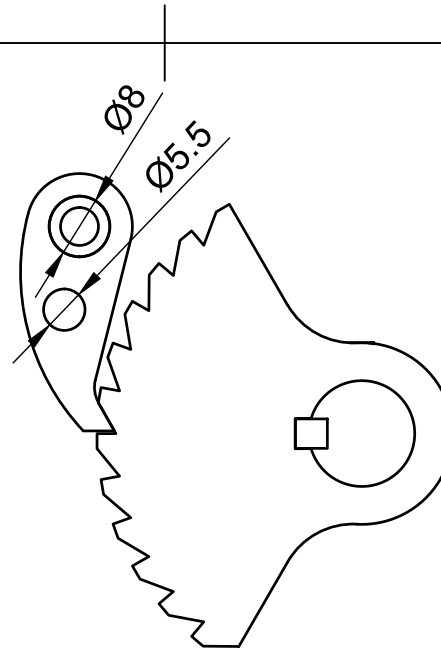


M4x5 - DIN 914

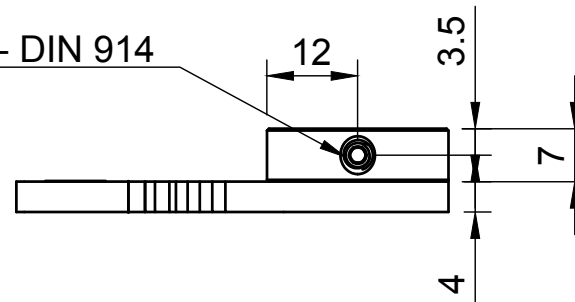





B (4:1)

Brass bushing

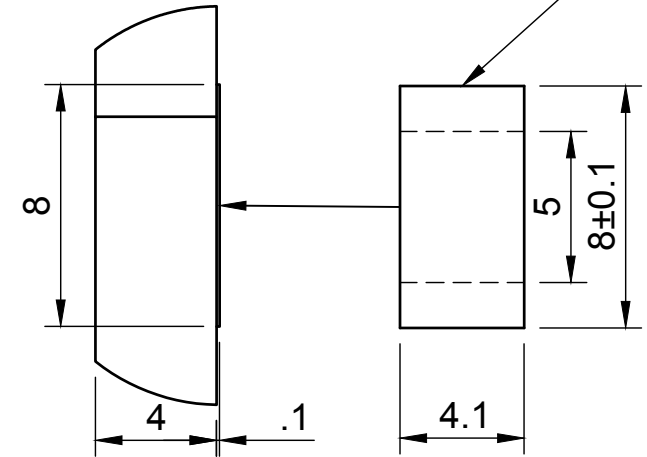

The brass bushing is inserted into the ratchet and serves as a bearing. Therefore, it must be free to move, make use of the tolerances.

Dept. KogEtho	Technical reference	Created by Louis Frank	2022-01-18	Approved by
		Document type	Document status	
		Title Hebel_Assembly	DWG No.	
		Rev. 5	Date of issue 2022-02-11	Sheet 2/3

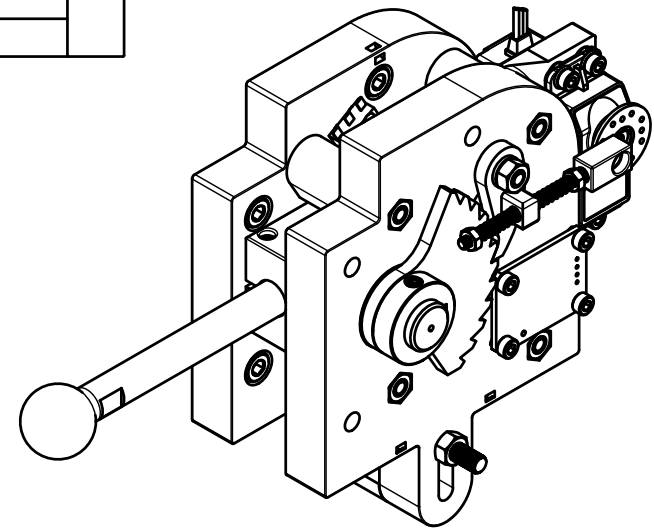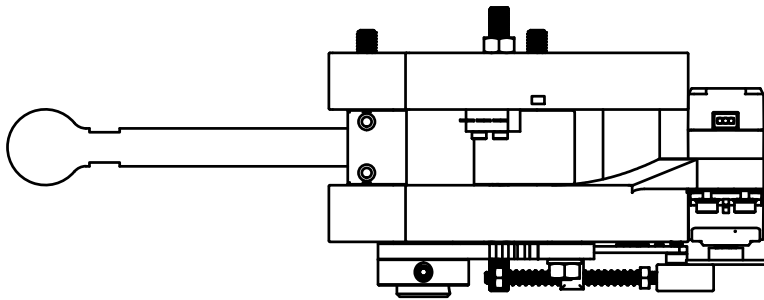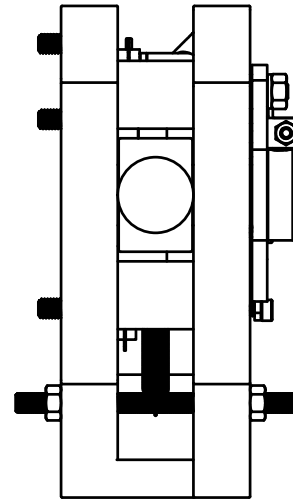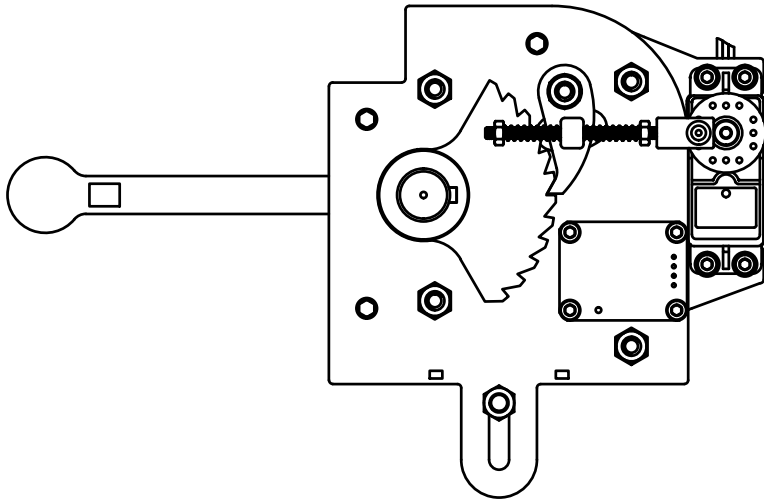

Dept. KogEtho	Technical reference	Created by Louis Frank	2022-01-18	Approved by
		Document type	Document status	
		Title Hebel_Assembly	DWG No.	
		Rev. 5	Date of issue 2022-02-11	Sheet 3/3