



Dept. KogEtho	Technical reference	Created by Louis Frank 2021-11-29	Approved by		
		Document type	Document status		
		Title Assembly_2	DWG No.		
			Rev. 2	Date of issue 2022-02-11	Sheet 1/4


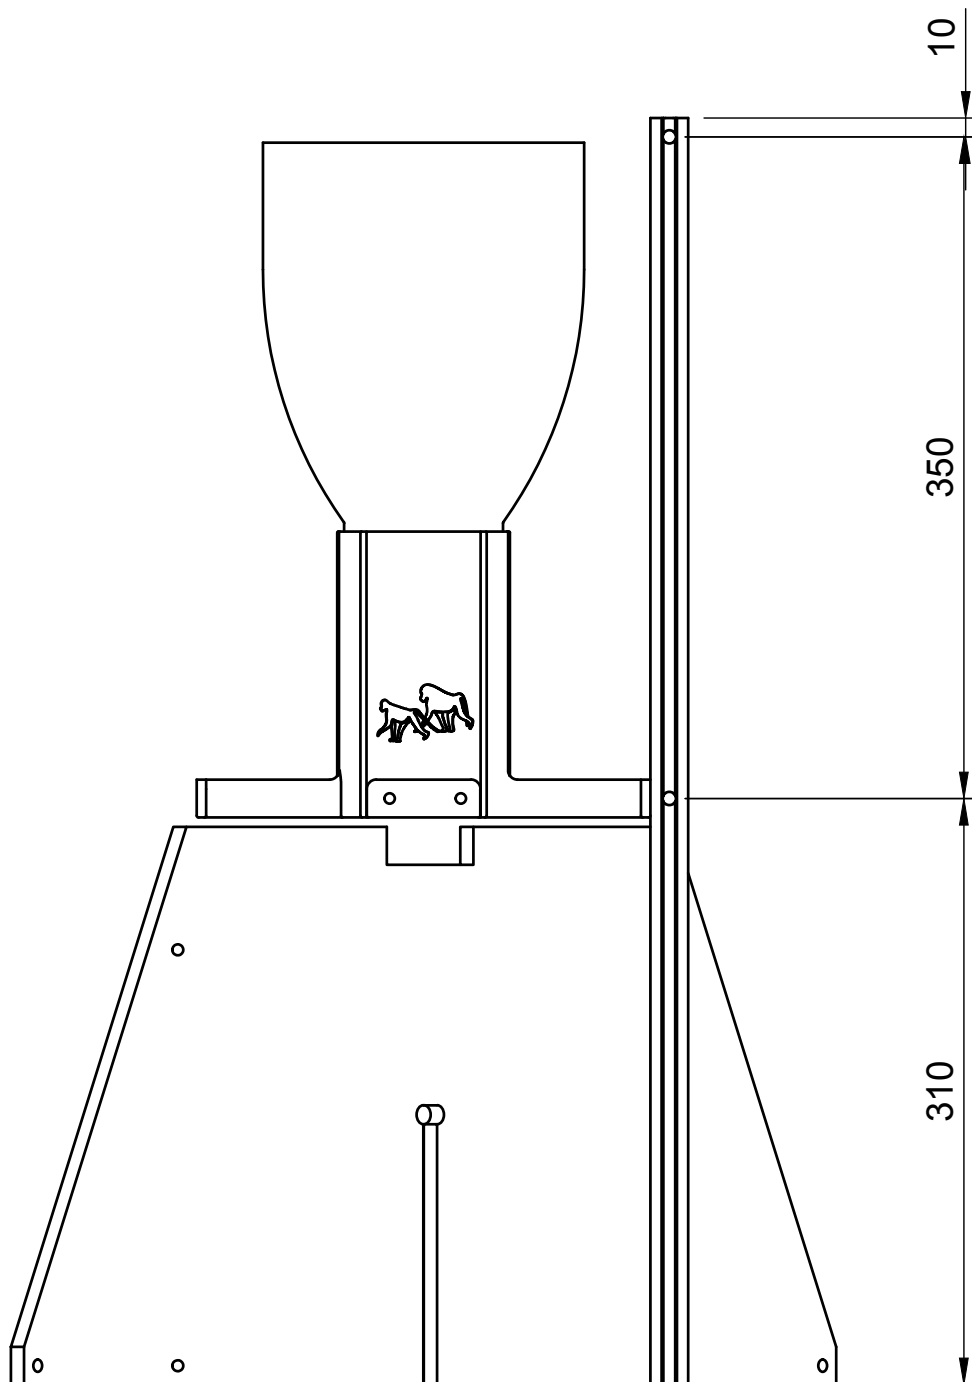


Dept. KogEtho	Technical reference	Created by Louis Frank	2021-11-29			Approved by		
		Document type			Document status			
		Title Assembly_2			DWG No.			
					Rev. 2	Date of issue 2022-02-11	Sheet 2/4	

The smaller opening should be on the side where the lever is located.

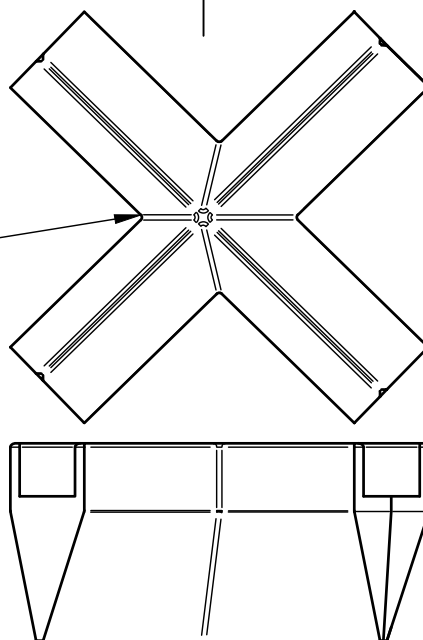

By applying tape to the button of the cross, the divider can be raised to adjust the distribution between the left and right sides of the device.

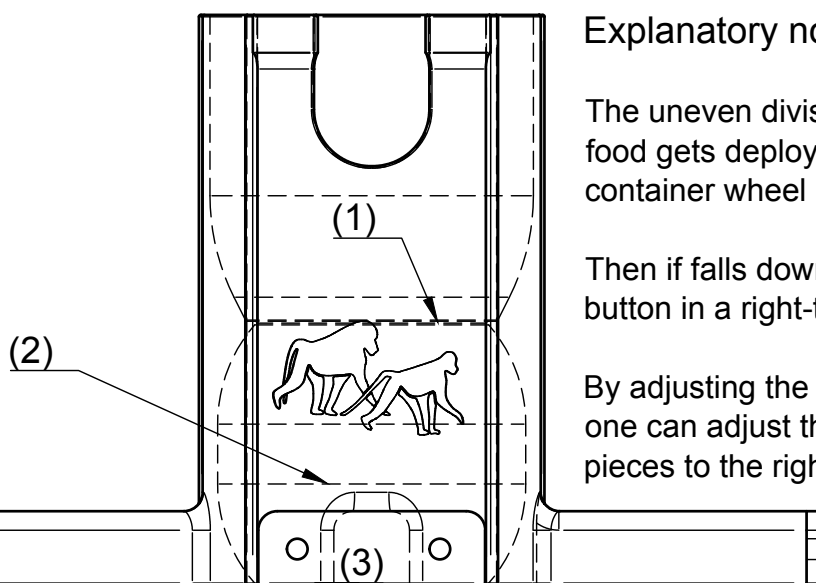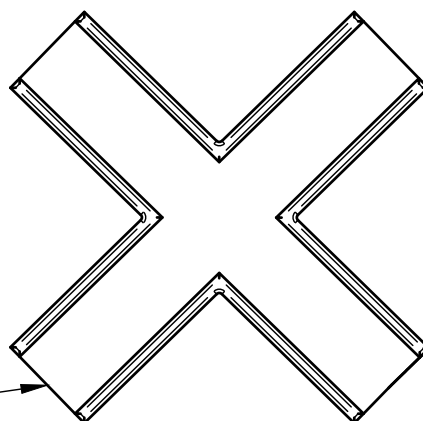


Explanatory note

The uneven division occurs, because the food gets deployed on the right half of the container wheel (1).


Then if falls down towards the opening on the button in a right-to-left direction (2)

By adjusting the height of the divider module, one can adjust the surface to reflect the food pieces to the right side. (3)

Dept. KogEtho	Technical reference	Created by Louis Frank	2021-11-29			Approved by
Divider module		Document type				Document status
		Title	Assembly_2			DWG No.
		Rev.	2	Date of issue	2022-02-11	Sheet 3/4

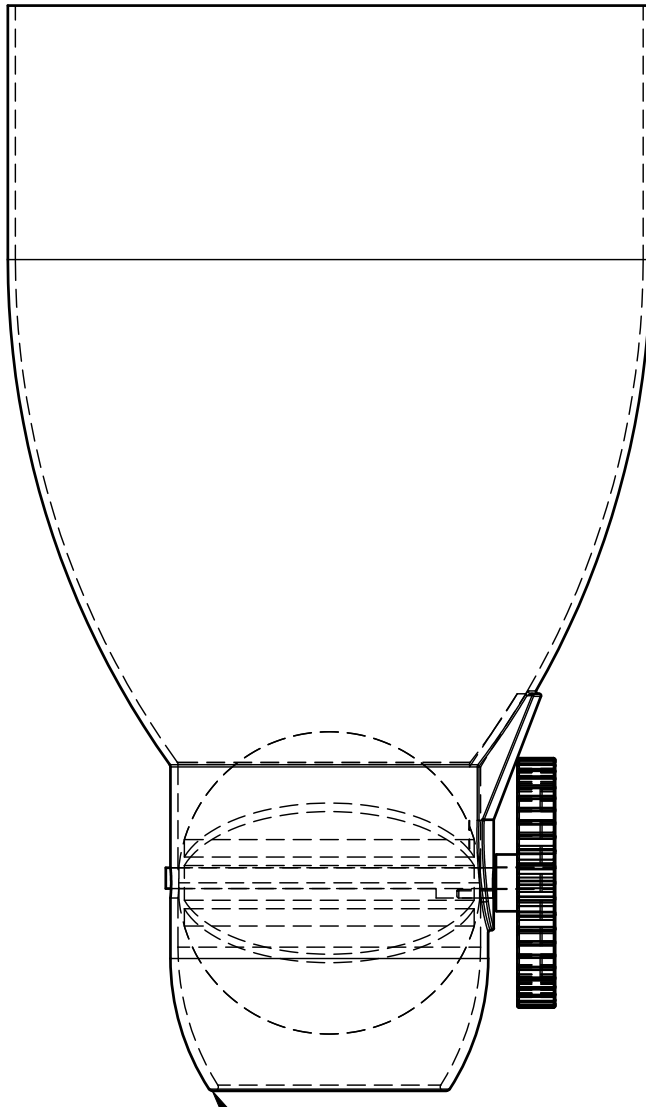

To remove the rubber wheel from the container, carefully pull out the axle/gear section towards the front.

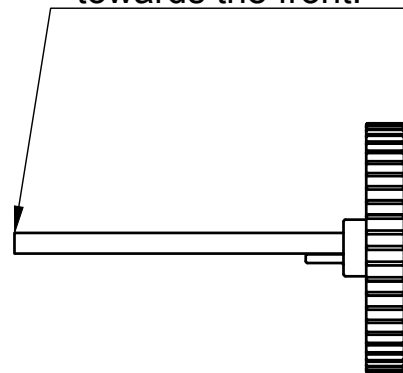

The container can be removed by carefully pulling it up and out of the apparatus.

Dept. KogEtho	Technical reference	Created by Louis Frank	2021-11-29			Approved by
Container cleaning		Document type				Document status
		Title Assembly_2				DWG No.
			Rev. 2	Date of issue 2022-02-11	Sheet 4/4	