



Hecho por: Coraima Mera Rodriguez

EXAMEN

a) TOPOLOGÍA

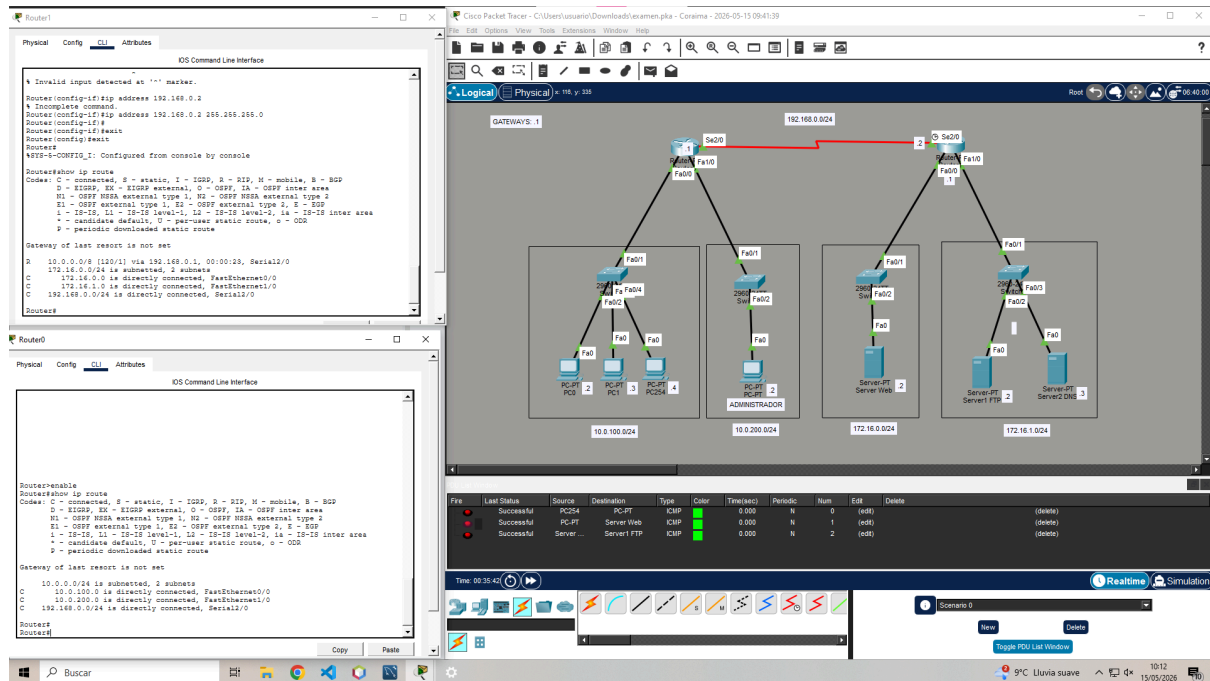

b) SERVIDORES

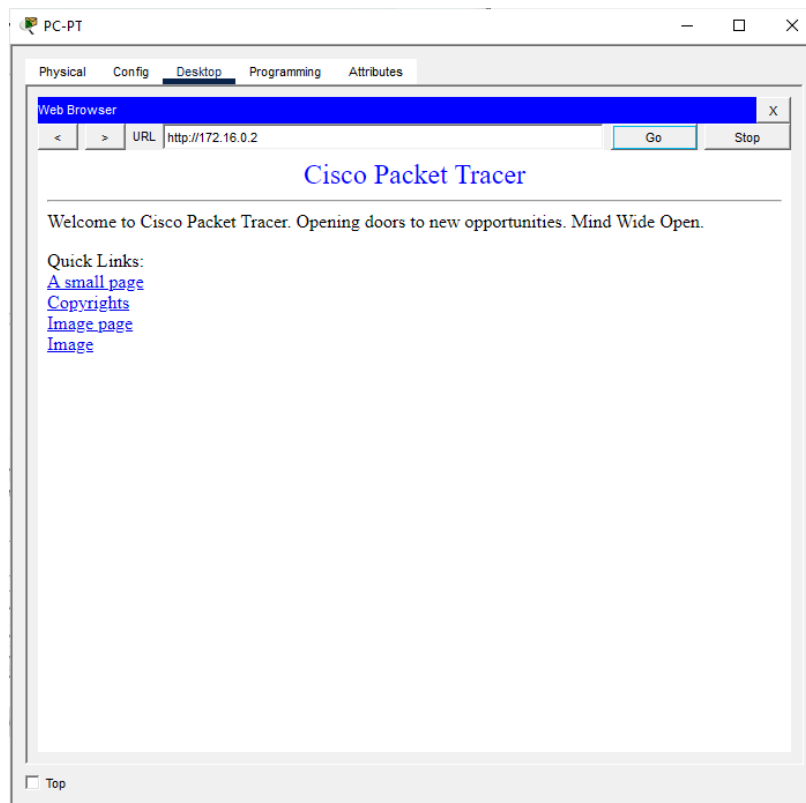

Server1 FTP

Physical
Config
Services
Desktop
Programming
Attributes

SERVICES

HTTP
DHCP
DHCPv6
TFTP
DNS
SYSLOG
AAA
NTP
EMAIL
FTP
IoT
VM Management
Radius EAP
PRP

FTP

Service

On
Off

User Setup

Username
Password

☐ Write
☐ Read
☐ Delete
☐ Rename
☐ List

	Username	Password	Permission	
1	cisco	cisco	RWDNL	Add
2	administrador	administrador	RWDNL	
3	usuario	usuario	RWD	Save
				Remove

File

1	asa842-k8.bin
2	asa923-k8.bin
3	c1841-advipservicesk9-mz.124-15.T1.bin
4	c1841-ipbase-mz.123-14.T7.bin
5	c1841-ipbasek9-mz.124-12.bin
6	c1900-universalk9-mz.SPA.155-3.M4a.bin

Remove

Server2 DNS

Physical
Config
Services
Desktop
Programming
Attributes

SERVICES

HTTP
DHCP
DHCPv6
TFTP
DNS
SYSLOG
AAA
NTP
EMAIL
FTP
IoT
VM Management
Radius EAP
PRP

DNS

DNS Service

On
Off

Resource Records

Name
Type
NS Record

Server Name

Add
Save
Remove

No.	Name	Type	Detail
0	prueba	NS	www.prueba.com

DNS Cache

c) ACL ESTÁNDAR 1

Router1 CLI Configuration:

```

IOS Command Line Interface
System Bootstrap, Version 12.2(33)T, RELEASE SOFTWARE (fc1)
Copyright (c) 2009 by Cisco Systems, Inc.
PT 1001 (PT8C200) processor (revision 0x200) with 60416K/5120K bytes of memory
Ready to ROMMON initialized
Self decompressing the image :
*****
Restricted Rights Legend
Use, duplication, or disclosure by the Government is
subject to restrictions as set forth in subparagraph
(c) of the Commercial Computer Software - Restricted
Rights clause at FAR sec. 51.227-19 and subparagraph
(c) (1) (ii) of the Rights in Technical Data and Computer
Software clause at DFARS sec. 252.227-7013.
cisco Systems, Inc.
170 West Tasman Drive
San Jose, California 95134-1706
Cisco Internetwork Operating System Software
IOS (tm) PT1000 Software (PT1000-TM), Version 12.2(33), RELEASE SOFTWARE (fc1)
Technical Support: http://www.cisco.com/techsupport
Copyright (c) 1986-2009 by Cisco Systems, Inc.
Compiled Wed 27-Apr-04 19:01 by mhwang
PT 1001 (PT8C200) processor (revision 0x200) with 60416K/5120K bytes of memory
Processor board ID PT0133 (0133)
222000 processor: part number 0, mask 01
Bringing software.
3.3 software, Version 3.0.0.
4 FastEthernet/IEEE 802.3 interface(s)
3 Composed serial (typical) network interface(s)
384K bytes of non-volatile configuration memory.
6448K bytes of ATA CompactFlash (read/write)
Press RETURN to get started!

Router>enable
Router#conf t
Enter configuration commands, one per line. End with CNTL/Z.
Router(config)#access-list 1 deny host 10.0.100.4
Router(config)#access-list 1 deny host 10.0.100.4
Invalid input detected at '^' marker.
Router(config)#access-list 1 deny host 10.0.100.4
Router(config)#interface fa0/24
Router(config-if)#access-group 1 out
Router(config-if)#

```

Network Topology:

- Two switches (S200) are connected to a central router (R200) via Fa0/24 and Fa0/25.
- Switch S200 is connected to PC1, PC2, PC3, and PC4 via Fa0/24.
- Switch S200 is connected to Server-FTP and Server-DNS via Fa0/25.
- Switch S200 is connected to Server-FTP and Server-DNS via Fa0/25.

PC List Window:

File	Last Status	Source	Destination	Type	Color	Time(sec)	Periodic	Num	Edit	Delete
Failed	Failed	PC254	Server1 FTP	ICMP	Red	0.000	N	0	(edit)	(delete)
Failed	Failed	PC254	Server2 DNS	ICMP	Red	0.000	N	1	(edit)	(delete)

d) ACL ESTÁNDAR 2

Router1 CLI Configuration:

```

IOS Command Line Interface
System Bootstrap, Version 12.2(33)T, RELEASE SOFTWARE (fc1)
Copyright (c) 2009 by Cisco Systems, Inc.
PT 1001 (PT8C200) processor (revision 0x200) with 60416K/5120K bytes of memory
Ready to ROMMON initialized
Self decompressing the image :
*****
Restricted Rights Legend
Use, duplication, or disclosure by the Government is
subject to restrictions as set forth in subparagraph
(c) of the Commercial Computer Software - Restricted
Rights clause at FAR sec. 51.227-19 and subparagraph
(c) (1) (ii) of the Rights in Technical Data and Computer
Software clause at DFARS sec. 252.227-7013.
cisco Systems, Inc.
170 West Tasman Drive
San Jose, California 95134-1706
Cisco Internetwork Operating System Software
IOS (tm) PT1000 Software (PT1000-TM), Version 12.2(33), RELEASE SOFTWARE (fc1)
Technical Support: http://www.cisco.com/techsupport
Copyright (c) 1986-2009 by Cisco Systems, Inc.
Compiled Wed 27-Apr-04 19:01 by mhwang
PT 1001 (PT8C200) processor (revision 0x200) with 60416K/5120K bytes of memory
Processor board ID PT0133 (0133)
222000 processor: part number 0, mask 01
Bringing software.
3.3 software, Version 3.0.0.
4 FastEthernet/IEEE 802.3 interface(s)
3 Composed serial (typical) network interface(s)
384K bytes of non-volatile configuration memory.
6448K bytes of ATA CompactFlash (read/write)
Press RETURN to get started!

Router>enable
Router#conf t
Enter configuration commands, one per line. End with CNTL/Z.
Router(config)#access-list 2 deny host 10.0.100.4
Router(config)#access-list 2 permit any
Router(config)#interface fa0/24
Router(config-if)#access-group 2 out
Router(config-if)#exit
Router(config)#

```


Network Topology:

- Two switches (S200) are connected to a central router (R200) via Fa0/24 and Fa0/25.
- Switch S200 is connected to PC1, PC2, PC3, and PC4 via Fa0/24.
- Switch S200 is connected to Server-FTP and Server-DNS via Fa0/25.
- Switch S200 is connected to Server-FTP and Server-DNS via Fa0/25.

PC List Window:

File	Last Status	Source	Destination	Type	Color	Time(sec)	Periodic	Num	Edit	Delete
Successful	Successful	PC1	PC254	ICMP	Green	0.000	N	0	(edit)	(delete)

e) ACL EXTENDIDA 1

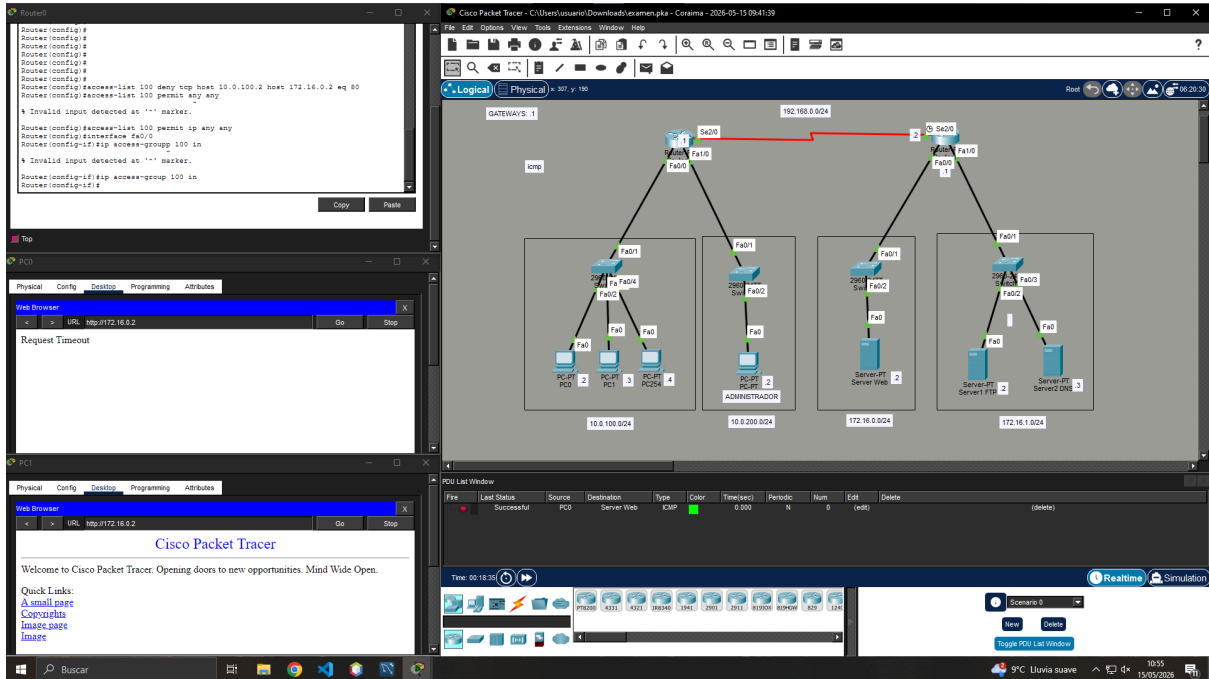

f) ACL EXTENDIDA 2

