MIL-C-7966C
7 October 1987
SUPERSEDING
MIL-C-7966B
13 April 1967

MILITARY SPECIFICATION

CLOTH, COATED, RUBBER, NYLON BASE

This specification is approved for use by all Departments and Agencies of the Department of Defense.

1. SCOPE

1.1 Scope. This specification establishes the requirements for nylon base rubber coated cloths intended for use in the manufacture of the weathershield on the LR-1 inflatable life raft and the canopy on the LRU-14A/A inflatable life raft

1 2 Classification The coated cloths shall be of the following types, as specified (see 6.2).

Variety S - Spray shield cloth, 3 ounces per square yard.

Variety P - Paulin cloth, 6 75 ounces per square yard.

2. APPLICABLE DOCUMENTS

2 1 Government documents

2.1.1 Specifications and standards. The following specifications and standards form a part of this specification to the extent specified herein. Unless otherwise specified, the issues of these documents shall be those listed in the issue of the Department of Defense Index of Specifications and Standards (DODISS) and supplement thereto, cited in the solicitation

SPECIFICATIONS

Federal

V-T-295	Thread, Nylon
PPP-P-1136	Packaging of Coated (Plastic; Rubber) and Laminated Fabrics

Beneficial comments (recommendations, additions, deletions) and any pertinent data which may be of use in improving this document should be addressed to: Systems Engineering and Standardization Department (Code 53), Naval Air Engineering Center, Lakehurst, NJ 08733-5100, by using the self-addressed Standardization Document Improvement Proposal (DD Form 1426) appearing at the end of this document or by letter.

DISTRIBUTION STATEMENT A: Approved for public release, distribution is unlimited
Source: https://assist.dla.mil -- Downloaded: 2026-10-17T09:42Z
Check the source to verify that this is the current version before use.

SPECIFICATIONS (Continued)

Military

MIL-C-7020	Cloth, Nylon, Parachute
MIL-L-18494	Life Raft, Inflatable, LRU-14A/A
MIL-L-81542	Life Raft, Inflatable, One Man, Type LR-1

STANDARDS

Federal

FED-STD-141	Paint, Varnish, Lacquer, and Related Materials; Methods of Inspection, Sampling, and Testing
FED-STD-191	Textile Test Methods
FED-STD-313	Material Safety Data Sheets, Preparation and Submission of
FED-STD-595	Colors
FED-STD-601	Rubber, Sampling and Testing
FED-STD-751	Stitches, Seams, and Stitchings

Military

MIL-STD-105	Sampling Procedures and Tables for Inspection by Attributes

(Copies of specifications and standards required by contractors in connection with specific acquisition functions should be obtained from the contracting activity or as directed by the contracting activity.)

2.3 Order of precedence In the event of a conflict between the text of this specification and the references cited herein (except for associated detail specifications, specification sheets or MS standards), the text of this specification shall take precedence. Nothing in this specification, however, shall supersede applicable laws and regulations unless a specific exemption has been obtained.

3. REQUIREMENTS

3.1 First article. When specified in the contract or purchase order, a sample shall be subjected to first article inspection (see 4 3 and 6.3)

3.2 Base cloth

3.2 1 Base cloth for Variety S The base cloth for Variety S coated cloth shall be a ripstop woven nylon cloth conforming to Type I of MIL-C-7020, except that it need not conform to the colorfastness, air permeability and breaking strength requirements. The silicone oil requirements of MIL-C-7020 shall not apply. Silicone oil shall not be used on the cloth. The cloth shall be scoured and uniformly heat set The base cloth may be yarn or piece dyed. The base cloth shall be a daylight fluorescent red color conforming to the spectrophotometric requirements in Table I. The contractor shall furnish the contracting officer a certificate of compliance regarding silicone oil requirement

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T09:42Z
Check the source to verify that this is the current version before use.

TABLE I. Red color spectrophotometric requirements.

Coated Cloth Variety	S		P	
	Reflectance, Percent			
	Min	Max	Min	Max
Wavelength, millimicrons				
440	15	30	25	55
450	15	30	30	60
460	15	30	30	55
540	--	8	--	8
550	--	8	--	8
560	--	8	--	8
630	60	--	120	--
640	60	--	120	--
650	60	--	120	--

3.2.2 Base cloth for Variety P. The nylon yarn used in the manufacture of the base cloth shall be a bright, high tenacity, multi-filament polyamide prepared from hexamethylene diamine and adipic acid or its derivatives. The base cloth weave shall be a warp face 4 up, 1 down, five harness satin with a counter of 3 The finished base cloth shall weigh not more than 3 5 ounces per square yard The base cloth may be yarn or piece dyed with the highest quality of fluorescent dyestuffs. The cloth shall be scoured and uniformly heat set. The base cloth shall be a daylight fluorescent red color conforming to the spectrophotometric requirements specified in Table I. The weight of the cloth shall be a minimum of 2.9 ounces per square yard.(see 6.5)

3.3 Coating The compound used in the coating of the base cloth shall be new plantation natural or synthetic natural rubber A uniform coating of two or more layers of rubber shall cover the back of the base cloth The outer surface of the rubber shall be pigmented to match lusterless (blue) color No. 35042 of FED-STD-595 A prime coating or an adhesion promoter may be used to obtain the required coating adhesion. An anti-oxidant shall be incorporated in the rubber compound to retard aging effects in service. No materials which are injurious to the cloth or which will be water soluble after vulcanization shall be used. All fillers and vulcanizing agents used shall be sufficiently milled so that a uniform product will be produced The compounding ingredients shall be prepared in such proportions as to cure properly and provide proofing films suitable for retaining water (see Table VIII). The potability of water coming in contact with the coating shall not be affected. The coated side of the cloth shall be dusted with talc or zinc stearate to prevent blocking

3.3.1 Toxicity. The coated cloth shall have no adverse effect on the health of personnel when used for its intended purpose. Questions pertinent to this effect shall be referred by the acquiring activity to the appropriate medical service who will act as advisor to the acquiring activity. The manu-

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T09:42Z
Check the source to verify that this is the current version before use.

facturer shall certify that the coated cloth contains no substance known to be toxic to the user under normal conditions of use. Material safety data sheets shall be prepared and submitted in accordance with FED-STD-313.

3 3.2 Color of coated cloth (uncoated side). The uncoated side of the coated cloth shall be a daylight fluorescent red color conforming to the spectrophotometric requirements specified in Table I when tested as specified in 4.4.1.

3 3.2 1 Matching (coated side). The color shall match the color number when viewed under filtered tungsten lamps which approximate artificial daylight having a correlated color temperature of 7500 ± 200K, with illumination of 100 ± 20 foot candles, and shall be a good match to the sample under incandescent lamplight at 2300 ± 200K.

3.4 Age. The date of application of the coating to the base cloth shall be stamped at the end of the roll and on the tag The time elapsed from this date to the date of delivery to the procuring activity or to the end item fabricator shall be no more than 10 weeks.

3.5 Physical properties. The physical properties shall conform to the requirements specified in Table II and in paragraphs 3.5.1 through 3.5.5.

3.5.1 Cold effect. The coated cloth shall not crack or flake when subjected to the cold effect procedure at -54 ± 1°C (-65 ± 2°F) as specified in 4.4.3.

3.5 2 Blocking. The coated cloth shall show a resistance to blocking rating no greater than (2) when subjected to the blocking test at 93 ± 1°C (200 ± 2°F) as specified in Table VIII.

3.5 3 Accelerated weathering. The coated cloth shall not crack when folded sharply on itself, and the coating shall show good colorfastness, after accelerated weathering exposure of the Variety S coated cloth for 50 hours and the Variety P coated cloth for 150 hours as specified in 4.4 4.

3.5 4 Sewing qualities. The sewing qualities of coated cloth shall be such that there shall be no needle gumming or needle breakage, and the thread breakage shall not exceed four breaks in 2000 stitches during sewing operations as specified in 4.4.5.

TABLE II. Physical requirements.

Characteristic	Requirement	
Cloth Coated Variety	S	P
Weight, ounces per square yard, max	3.0	6.75
Breaking strength, grab, pounds, min		
Warp	50	200
Filling	50	150
Tearing strength, pendulum, grams, min		
Warp	450	2000
Filling	350	1000

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T09:42Z
Check the source to verify that this is the current version before use.

TABLE II. Physical requirements (continued).

Characteristic	Requirement	
Water resistance, psi, min		
As received	15	15
After cold effect test	12	12
After abrasion		12
Adhesion in warp direction, pounds per inch of width, min	3.0	3.0
Acidity, pH	6.5 to 8 0	6.5 to 8.0

1/ See Table VIII for weight, breaking and tearing strength and acidity test methods.

3.5.5 Dimensions.

3.5 5.1 Width. Unless otherwise specified, the overall width of the finished coated cloth shall be 42 inches (plus 1 inch - minus 0)

3.5.5.2 Length of roll. Unless otherwise specified, the coated cloth shall be furnished in rolls containing 100 to 125 yards There shall be no more than 2 pieces, and each piece shall contain not less than 40 yards.

3.6 Workmanship The finished coated cloth shall be clean, evenly coated on the coated side, evenly woven on the uncoated face side, and shall conform to the quality and grade of product established by this specification. The occurrence of defects shall not exceed the applicable acceptable quality levels

4 QUALITY ASSURANCE PROVISIONS

4.1 Responsibility for inspection Unless otherwise specified in the contract or purchase order, the contractor is responsible for the performance of all inspection requirements as specified herein Except as otherwise specified in the contract or purchase order, the contractor may use his own or any other facilities suitable for the performance of the inspection requirements specified herein, unless disapproved by the Government. The Government reserves the right to perform any of the inspections set forth in the specification where such inspections are deemed necessary to assure supplies and services conform to prescribed requirements.

4.1.1 Responsibility for compliance. All items must meet all requirements of Sections 3 and 5 The inspection set forth in this specification shall become a part of the contractor's overall inspection system or quality program The absence of any inspection requirements in the specification shall not relieve the contractor of the responsibility of assuring that all products or supplies submitted to the Government for acceptance comply with all requirements of the contract. Sampling in quality conformance does not authorize submission of known defective material, either indicated or actual, nor does it commit the Government to acceptance of defective material

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T09:42Z
Check the source to verify that this is the current version before use.

4.2 Classification of inspection The inspection requirements specified herein are classified as follows.

a First article inspection (see 4.3).

b Quality conformance inspection (see 4 4).

4 3 First article inspection The first article inspection of the cloth shall consist of visual inspection for appearance, color and finish. The samples shall also be tested for physical and chemical characteristics in accordance with 4 4 2 and 4.5

4.3.1 First article samples Unless otherwise specified, as soon as practicable after the award of the contract or order, the contractor shall submit 1 yard full width of the basic cloth prior to coating and 3 yards full width of the coated cloth The samples shall be representative of the construction, workmanship, components and materials to be used during production. When a contractor is in continuous production of the cloth from contract to contract, submission of further first article inspection samples on the new contract may be waived at the discretion of the acquiring activity (see 6.2.1). Approval of the first article inspection samples or the waiving of the first article inspection does not waive the requirements of performing the quality conformance inspection. The first article inspection samples shall be furnished to the Government as directed by the contracting officer (see 6.2.1) The first article inspection sample shall be identified by securely attached tags or labels durably marked with the following information:

Sample for First Article Inspection
CLOTH, COATED, RUBBER, NYLON BASE
Name of manufacturer
Name of distributor (if applicable)
Product designation (manufacturer's)
Date of manufacture
Submitted by (name) (date) for first article
inspection in accordance with the requirements
of MIL-L-7966C(AS)

4.3.2 Test report Two copies of the contractor's test report, containing complete test data for the end item and for each component required herein and referring specifically to the applicable paragraphs, shall be submitted with the first article inspection sample

4.4 Quality conformance inspection. The quality conformance inspection shall be performed in accordance with the test conditions specified.

4.4.1 Inspection conditions. Unless otherwise specified, all inspections shall be performed in accordance with the test conditions specified in 4.6

4.4.2 Component and material inspection. In accordance with 4.1 above, components and materials shall be tested in accordance with all the requirements of referenced specifications, drawings and standards unless otherwise excluded, amended, modified or qualified in this specification or applicable

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T09:42Z
Check the source to verify that this is the current version before use.

purchase documents. In addition, testing shall be performed on the components for the characteristics specified in Table IV. The sample unit for testing shall be three continuous yards full width. The sample size (number of sample units) shall be as specified in Table III. The lot size shall be expressed in units of one yard each. The lot shall be unacceptable if one or more sample units fail to meet any requirements specified.

TABLE III Sample size for testing.

Lot Size (Yards)	Sample Size (Units)
800 or less	2
801 to 22,000	3
22,001 and over	5

TABLE IV. Test methods.

Component	Characteristic	Requirement	Test Method
Yarn 1/	Type of Nylon	3.2	
Base Fabric (Variety P)	Weave	3.2.2	Visual
	Weight	3.2.2	5041
	Yarn Per Inch		
	Warp	3.2.2	5050
	Filling	3.2 2	5050
Coating Compound 1/	Natural or Synthetic	3.3	
	Natural		
Talc or Zinc Stearate 1/		3.3	

1/ Acceptance for this requirement may be based on contractor's certificate of compliance

4 4.3 Inspection of the end item

4.4.3.1 Examination of the end item The end item shall be examined in accordance with the classification of defects at the inspection levels and acceptable quality levels (AQLs) set forth below The lot size for purposes of determining the sample size in accordance with MIL-STD-105 shall be expressed in units of yards for the examination in 4 4.3 1.1 through 4.4.3 1.3.

4.4.3.1 1 Yard-by-yard examination. The required yardage of each roll shall be inspected on both sides and visual defects classified as in Tables V and VI In addition, the coated side shall be given a separate through-light inspection for pinholes For through-light inspection, any extraneous lighting which directly falls upon the side of the fabric to be inspected shall be eliminated. The defects found shall be counted regardless of their proximity to each other except where two or more defects represent a single local condition of the cloth, in which case only the more serious defect shall be counted A continuous defect shall be counted as one defect for each warp-

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T09:42Z
Check the source to verify that this is the current version before use.

wise yard or fraction thereof in which it occurs. The sample unit for this examination shall be one yard The AQL for each side shall be 1.5 major defects and 4.0 minor defects per hundred units. The inspection level for each side shall be Level II of MIL-STD-105. The number of rolls over which the sample yardage shall be distributed shall be in accordance with Table VII An approximately equal number of yards shall be examined from each roll selected.

TABLE V. Defects of the uncoated cloth.

Defects	Major	Minor
Bias filling		
3 inches or more from straight line of filling to greatest point of bias		X
Bowed filling		
Over 1-1/2 inches straight line to highest point of arc	X	
Over 1/2 inch but not more than 1-1/2 inches from straight line to highest point of arc		X
Broken yards		
Three or more contiguous regardless of length, or two contiguous, 2 inches or more missing	X	
Two contiguous, less than 2 inches missing, or single 9 inches or more missing		X
Smash - Any	X	
Wrong draw - Extending for more than 9 inches 1/		X
Fuzz ball, stripback or bunch 1/ and 3 or more times normal yard diameter		X
Hitchback - Resulting in an open place 1/		X
Heavy filling bar or heavy place		X
Double pick or mispick		X
Jerked-in filling or slough off - 3 inches or more		X
Fine or light filling bar, light place 1/	X	
Slack end		
Two or more contiguous, jerked-in between picks, or forming loops on surface of cloth	X	
Single, jerked-in between picks or forming clearly noticeable loops on surface of cloth		X
Floats or skips		
Multiple, 3/8 inch or more in either warp or filling direction	X	
Multiple less than 3/8 inch in either warp or filling direction, or single, floating over more than 3 inches, or any sequence of pin floats		X

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T09:42Z
Check the source to verify that this is the current version before use.

TABLE V Defects of the uncoated cloth (continued).

Defects	Major	Minor
Mixed or uneven filling, shade bar, barre mark 1/		X
Spot, stain or streak		
One inch or more in combined length and width dimensions	X	
More than 1/4 inch but less than 1 inch in combined length and width dimensions		X
Coating, stain, streak or strike through		X
Hole, cut or tear - any (including selvage) in base cloth only	X	
Abrasion, chafe, or bruise mark 1/	X	

1/ Clearly visible at normal inspection distance of 3 feet

TABLE VI. Defects of coating

Defects	Major	Minor
Abrasion mark - Resulting in a weak place or evidence of coating removed 1/	X	
Blister or lump - Any soft (hollow) 1/	X	
Hard lump (solid) 1/		X
Crease or wrinkle - Embedded, or resulting in doubling or adhesion of surfaces against each other, or incomplete coating	X	
Cut, hole, tear or pinhole - Any 2/	X	
Light areas or windows - More than 3 per linear yard 1/ (e.g , poor distribution of pigments)		X
Selvage - Scalloped, deepest indentation 1/2 inch or more		X
Tight, resulting in pucker or waviness adjoining cloth		X
Uneven tension - Puckers, waviness, ridges that will not flatten under manual pressure		X
Spot, stain or streak 1/		X
Uneven coating - Thin areas where coating is missing or insufficient	X	
Heavy coated area 1/		X
Width less than specified		X

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T09:42Z
Check the source to verify that this is the current version before use.

1/ Clearly visible at normal inspection distance of 3 feet.

2/ Examination for pinholes shall be made by viewing the surface of the cloth held under light tension A bright light source shall be positioned behind the coated cloth so as to clearly illuminate the surface without producing glare in the observer's eyes A pinhole is defined as an opening observed in the film under the conditions stated above, even though it may not be visible when coated cloth is viewed in normal daylight or the equivalent thereof.

4.4 3 1 2 Overall examination. Each defect listed below shall be counted not more than once in each roll examined The rolls shall be examined on both sides The sample unit for this examination shall be one roll. The sample size and the acceptance number shall be as shown in Table VII

Defects

Overall.

Objectionable odor
Note. Aromatic odors usually associated with specific types of coating compounds or solvents shall not be regarded as objectionable
Ripples, waviness, dimensional distortion.

Selvage edges not cut straight, or edges folded or rolled continuously or intermittently for more than half of the roll.

Coated side

Not clean throughout
Variations in color of coating end to end, side to center, side to side or throughout the piece
Not dusted
Uneven coating throughout.
Coating streaks.
Tackiness (coating will adhere and not readily unroll)

Uncoated side

Off shade, mottled, cloudy, streaky; shaded end to end, side to center, side to side or throughout the piece.
Uneven weaving throughout.
Not clean throughout
Clearly noticeable contamination, specks, fly, reps in colors other than that of the cloth

TABLE VII Sample size and acceptance number.

Lot Size in Yards	Sample Size in Rolls	Acceptance Number
Up to 1300 1/	3	0
1301 to 3200	5	0
3201 to 8000	7	0

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T09:42Z
Check the source to verify that this is the current version before use.

TABLE VII. Sample size and acceptance number(continued).

Lot Size in Yards	Sample Size in Rolls	Acceptance Number
8001 to 22,000	10	0
22,001 to 110,000	15	1
110,001 and up	25	1

1/ If a lot contains fewer than three rolls, each roll in the lot shall be examined.

4.4.3.1.3 Examination for length . Each individual roll in the sample shall be examined for the defects listed below. The sample unit for this examination shall be one roll. The sample size and acceptance number shall be as shown in Table VII.

Defects

Length of roll less than 100 yards.

Length of roll more than 125 yards

Any roll more than two yards below gross length marked on ticket

Any roll containing more than 2 pieces

Any piece less than 40 yards.

Actual gross length of rolls in sample less than the total gross yards marked on tickets.

4.5 Examination of preparation for delivery requirements. An examination shall be made in accordance with the provisions of PPP-P-1136, to determine that packaging, packing and marking comply with the Section 5 requirements of this specification

4.6 Testing of the end item The method of testing specified in FED-STD-191 wherever applicable and as listed in Table VIII shall be as follows The physical and chemical values specified in Section 3 apply to the average of the determinations made on a unit of product for test purposes as specified in the applicable test method. The unit of product for testing shall be 1 yard full width of basic cloth prior to coating and 3 yards full width of the coated cloth. The lot shall be expressed in units of 1 linear yard. The lot shall be unacceptable if one or more units fail to meet any requirement specified. The sample size shall be as follows:

Lot Size (Yards)	Sample Size
800 or less	2
801 to 22,000	3
22,001 and over	5

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T09:42Z
Check the source to verify that this is the current version before use.

TABLE VIII. Test methods.

Characteristic	Requirement	FED-STD-191 Test Method No.
Solubility in water	3.3	6631 or FED-STD-601
Weight (Variety P)	3.2.2	5041
Weight, Coated Cloth	Table II	5041
Breaking Strength	Table II	5100
Tearing Strength	Table II	5132
Acidity, pH	Table II	2811
Blocking	3.5.2	5872
Spectrophotometric Reflectance	Table I	
Cold Effect	3 5.1	
Accelerated Weathering	3 5.3	
Sewing Qualities	3.5.4	
Adhesion 1/	Table II	
Water Resistance	Table II	5512 1

1/ Separation of the cloth from the coating shall not be required if the adhesion of the cement to the coating is greater than the specified requirement

4 6 1 Color of base cloth and coated cloth Specimens of the base cloth and coated cloth shall be cut from samples which have been protected from exposure to light Specimens of the coated cloth shall be cut out at a distance of not less than 6 inches from the selvage and each end of the sample of coated cloth A color analyzer shall be used and the specimen shall be directly illuminated, normal to the surface exposed, by the full spectral emission from a light source during the spectral quality of CIE Source "C " The light reflected and emitted by the fluorescent material shall be picked up with a cylindrical mirror type apparatus as shown in Figure 1 and shall be evaluated spectrophotometrically with the instrument using a slit width of 0.5 mm (see 6 6) The light shall be measured at wave lengths specified in Table I in terms of a percentage of the light reflected from the reference standard, a freshly prepared magnesium oxide surface. To minimize the effects of directional reflectance, readings at 2 positions shall be averaged (the original sample position and a position where the sample has been rotated through 90 degrees).

4.6.2 Water resistance The water resistance of coated cloth shall be determined in accordance with Method 5512.1 of FED-STD-191 using a motor driven apparatus and exposing the coating surface of the cloth to the water

4.6.3 Cold effect and water resistance after cold test. The coated cloth shall be tested to determine the effects of exposure to a low temperature in accordance with Method 5874 of FED-STD-191. The exposure temperature shall be -54 ± 1°C (-65 ± 2°F). The water resistance of the exposed coated cloth shall be determined in accordance with 4.6.2.

4.6.3.1 Water resistance after abrasion (Variety P only). A 2-1/2 inch wide specimen of coated cloth shall be abraded with the oscillatory cylinder

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T09:42Z
Check the source to verify that this is the current version before use.

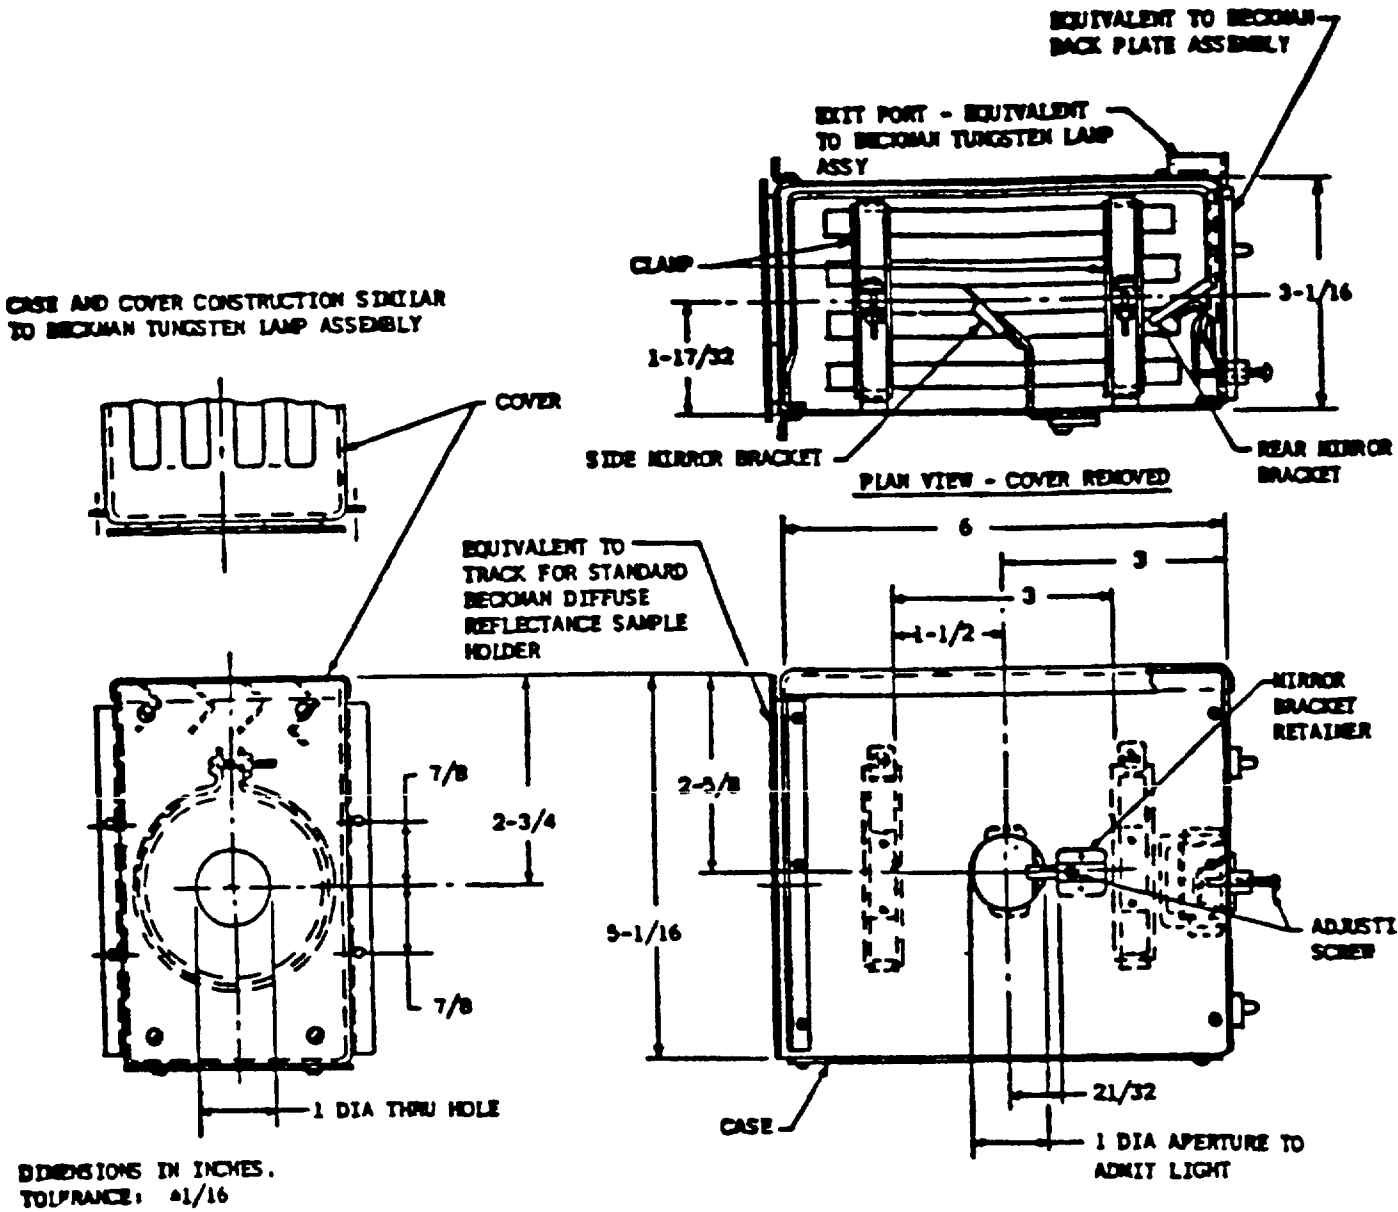


Figure 1. Cylindrical Mirror Apparatus

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T09:42Z
Check the source to verify that this is the current version before use.

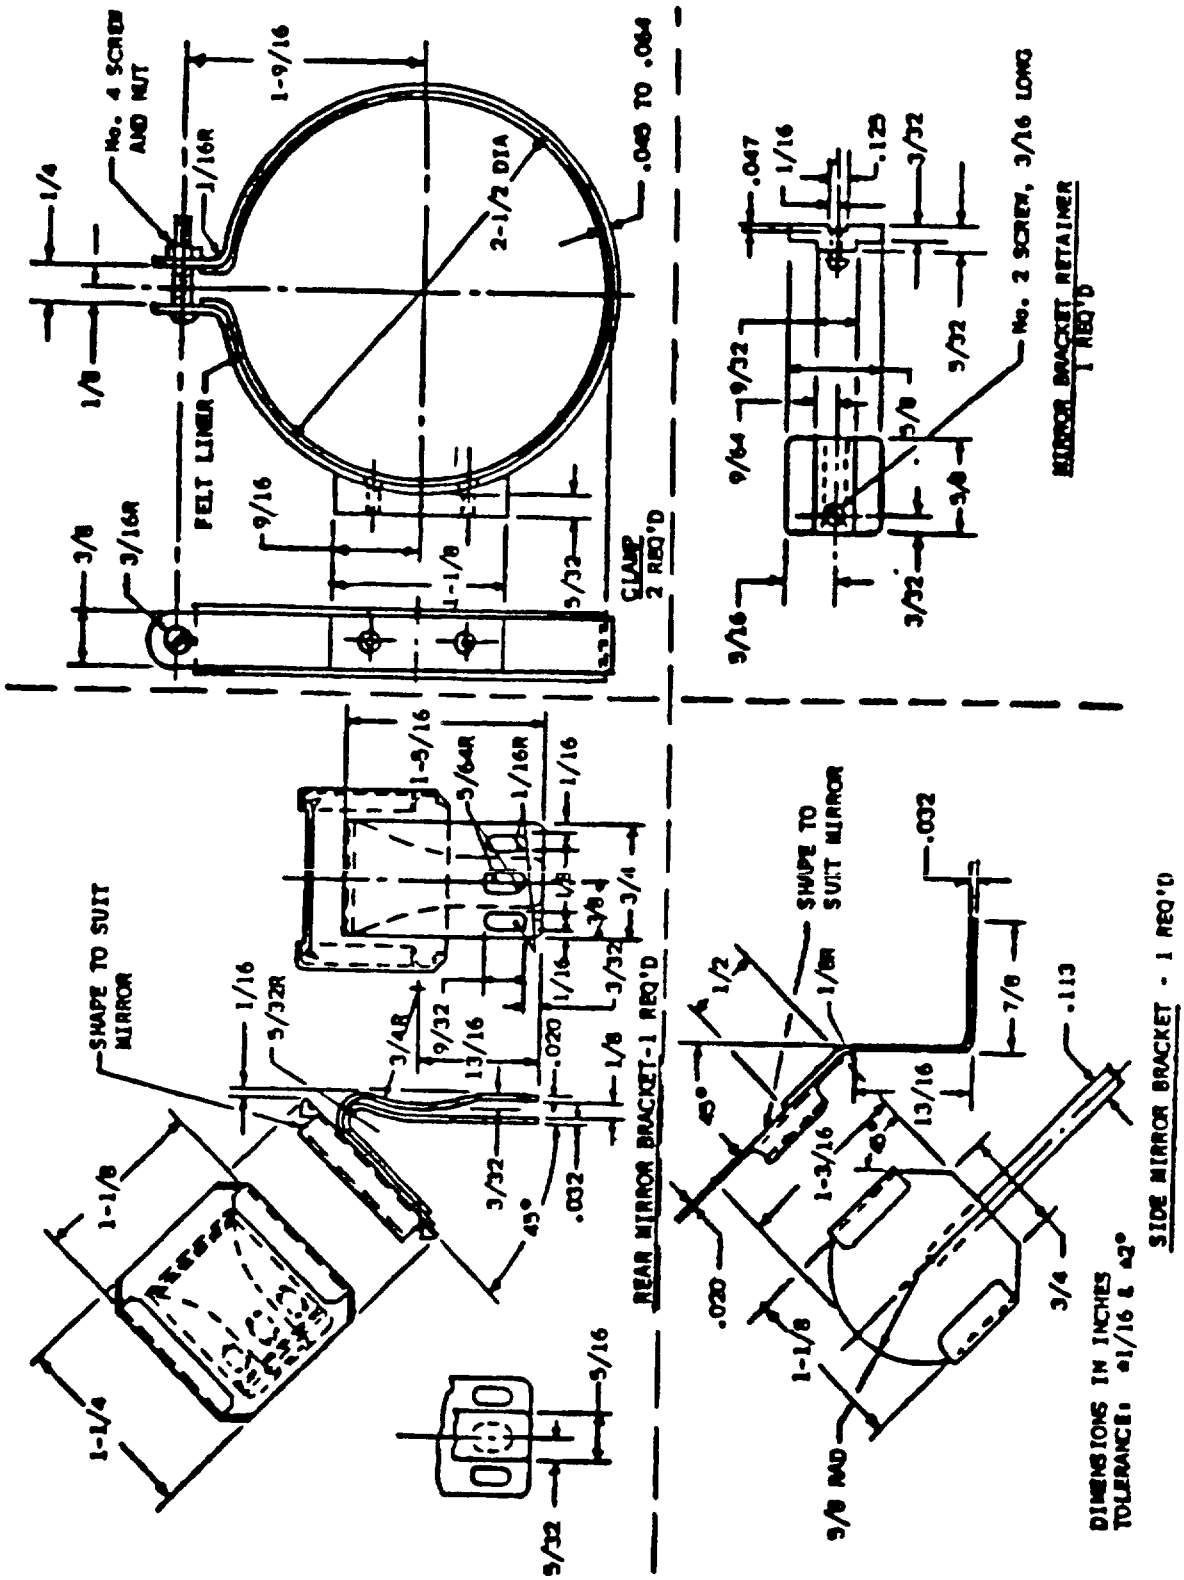


Figure 1. Cylindrical Mirror Apparatus(continued).

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T09:42Z
Check the source to verify that this is the current version before use.

(Wyzenbeek) abrasion tester which is described in Method 5304 of FED-STD-191 The abradant shall be No 10 oceanic duck. The specimen shall be subjected to 50 rubs under a tension of 5 pounds and under a load of 3 pounds. After being subjected to the abrasion procedure, the specimen shall be tested for water resistance in accordance with 4.6.2.

4.6.4 Accelerated weathering. Two specimens of the coated cloth, 2 by 8 inches, one with the long direction warpwise and the other fillingwise, shall be subjected to accelerated weathering as described in Method 5804 of FED-STD-191 The Variety S coated cloth shall be exposed for 50 hours and the Variety P coated cloth shall be exposed for 150 hours The coated surfaces of the specimens shall be the surfaces exposed to the weathering. Each exposed specimen, after conditioning, shall be folded sharply on itself and examined for cracking and for colorfastness of the coating. The colorfastness of the coating shall be rated as specified in Method 5662 of FED-STD-191.

4.6 5 Sewing qualities The sewing qualities of coated cloth shall be determined by sewing 4 thicknesses of the coated cloth on a single needle sewing machine using nylon thread conforming to Type I, Class 2, Size E of V-T-295.

5. PREPARATION FOR DELIVERY

5.1 .Preservation. The cloth shall be preserved in accordance with the applicable requirements of PPP-P-1136 (see 6.2).

5 2 Packing. The cloth shall be packaged in accordance with the applicable requirements of PPP-P-1136 (see 6.2).

5 3 Marking The shipments shall be marked in accordance with PPP-P-1136 In addition to any special marking required by the contract or purchase order, each tag shall be marked with the following information. "DATE OF APPLICATION OF COATING "

6. NOTES

6.1 Intended use

6 1.1 Variety S The nylon base rubber coated cloth covered by Variety S of this specification is intended for use in the manufacture of the weather-shield on the LR-1 inflatable life raft covered by MIL-L-81542.

6 1.2 Variety P. The nylon base coated cloth covered by Variety P of this specification is intended for use in the manufacture of the canopy on the LRU-14A/A inflatable life raft covered by MIL-L-18494

6.2 Ordering data. Procurement documents should specify the following

a Title, number and date of this specification.

b Variety required (see 1.2).

c Quantity required.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T09:42Z
Check the source to verify that this is the current version before use.

d Selection of applicable levels of preservation and packing.

e. Responsibility for the performance of the first article inspection.

6 3 First article inspection. When a first article inspection is required, the coated cloth should be a first production item. The first article should consist of the sample specified in 4.3 1. The contracting officer should include specific instructions in acquisition documents regarding arrangements for examinations, approval of first article test results and disposition of first articles. Invitations for bids should provide that the Government reserves the right to waive the requirements for samples for first article inspection to those bidders offering a product which has been previously acquired or tested by the Government, and that bidders offering such products, who wish to rely on such production or test, must furnish evidence with the bid that prior Government approval is presently appropriate for the pending contract.

6 4 Material safety data sheets Contracting officers will identify those activities requiring copies of completed Material Safety Data Sheets prepared in accordance with FED-STD-313 The pertinent government mailing addresses for submission of data are listed in appendix B of FED-STD-313

6 5 Suggested thread count Suggested thread count and weight of the base cloth are as follows· a thread count of 174 by 86 or 177 by 89.

6.6 Spectrophotometer. The Beckman DU spectrophotometer, the Beckman DK spectrophotometer. or equivalent may be used as the instrument for obtaining the spectral data.

6 7 Subject term (keyword) listing

Coated cloth
First article inspection
Inflatable life raft
Material safety data sheet
New plantation natural rubber
Synthetic natural rubber

6.8 Changes from previous issue. Asterisks (or vertical lines) are not used in this revision to identify changes with respect to the previous issue due to the extensiveness of the changes.

Custodians.
Navy - AS
Air Force - 99

Review activity:
Air Force - 82
DLA - CT

User
Navy - MU

Preparing activity:
Navy - AS
(Project No. 8305-0168)

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T09:42Z
Check the source to verify that this is the current version before use.

INSTRUCTIONS In a continuing effort to make our standardization documents better, the DoD provides this form for use in submitting comments and suggestions for improvements. All users of military standardization documents are invited to provide suggestions. This form may be detached, folded along the lines indicated, taped along the loose edge *(DO NOT STAPLE)*, and mailed. In block 5, be as specific as possible about particular problem areas such as wording which required interpretation, was too rigid, restrictive, loose, ambiguous, or was incompatible, and give proposed wording changes which would alleviate the problems. Enter in block 6 any remarks not related to a specific paragraph of the document. If block 7 is filled out, an acknowledgement will be mailed to you within 30 days to let you know that your comments were received and are being considered.

NOTE This form may not be used to request copies of documents, nor to request waivers, deviations, or clarification of specification requirements on current contracts. Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document(s) or to amend contractual requirements.

(Fold along this line)

(Fold along this line)

DEPARTMENT OF THE NAVY

mmanding Officer
val Air Engineering Center
stems Engineering and Standardization Department
(SESD), Code 53
kehurst, NJ 03733-5100

OFFICIAL BUSINESS
PENALTY FOR PRIVATE USE $300

NO POSTAGE NECESSARY IF MAILED IN THE UNITED STATES

BUSINESS REPLY MAIL
FIRST CLASS PERMIT NO 12503 WASHINGTON D C

POSTAGE WILL BE PAID BY THE DEPARTMENT OF THE NAVY

Commanding Officer
Naval Air Engineering Center
Systems Engineering and Standardization Department
(SESD), Code 53
Lakehurst, NJ 03733-5100

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T09:42Z
Check the source to verify that this is the current version before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

(See Instructions – Reverse Side)

1. DOCUMENT NUMBER	2. DOCUMENT TITLE
MIL-C-7966C	CLOTH, COATED, RUBBER, NYLON BASE

3a. NAME OF SUBMITTING ORGANIZATION	4. TYPE OF ORGANIZATION *(Mark one)*
	☐ VENDOR
b. ADDRESS *(Street, City, State, ZIP Code)*	☐ USER
	☐ MANUFACTURER
	☐ OTHER *(Specify)* _____

5. PROBLEM AREAS

a. Paragraph Number and Wording

b. Recommended Wording

c. Reason/Rationale for Recommendation

6. REMARKS

7a. NAME OF SUBMITTER *(Last, First, MI)* – Optional	b. WORK TELEPHONE NUMBER *(Include Area Code)* – Optional
c. MAILING ADDRESS *(Street, City, State, ZIP Code)* – Optional	8. DATE OF SUBMISSION *(YYMMDD)*

DD FORM 82 MAR 1426 PREVIOUS EDITION IS OBSOLETE.

Source: https://assist.dla.mil – Downloaded: 2026-10-17T09:42Z
Check the source to verify that this is the current version before use.