INCH-POUND
A-A-55184B
April 2, 2026
SUPERSEDING
A-A-55184A
April 21, 2020

COMMERCIAL ITEM DESCRIPTION

BERET, WOOL

The General Services Administration has authorized the use of this commercial item description (CID) for all federal agencies.

1. SCOPE. This CID covers the requirements for a 100 percent wool beret made of a knitted felt material. The beret is intended to be worn by male and female Military personnel.

2. CLASSIFICATION. The beret is available in the following Types, Classes, and Sizes. For Army classes only, a synthetic (faux) leather may be used as an alternate for the leather binding as referenced in the types below.

2.1 Types.

I – Unlined with flash and leather binding
II – Unlined without flash and leather binding
III – Lined with flash and leather binding
IV – Lined without flash and leather binding
V – Lined with flash and nylon tape binding

2.2 Classes.

1 – Rifle Green 297 (Army)
2 – Dark Blue 1561 (Air Force, Officers)
3 – Maroon 1560 (Air Force)
4 – Scarlet 1591 (Air Force)
5 – Medium Blue 1592 (Air Force)
6 – Black 1593 (Air Force)
7 – Maroon 453 (Army)
8 – Gray 1609 (Air Force)
9 – White 1610 (Air Force)
10 – Black 1593 (Army)
11 – Dark Blue 1561 (Air Force, Enlisted)
12 – Tan 450 (Army)
13 – Slate Gray (Army JROTC)
14 – Sierra Brown 569 (Security Force Assistance Brigade (SFAB) Army)
15 – Pewter Green 1667 (Air Force)

Comments, suggestions, or questions on this document should be sent to trpsptctstandardiz@dla.mil. Since contact information can change, verify the currency of the address information using ASSIST online database https://assist.dla.mil.

AMSC N/A FSC 8405

DISTRIBUTION STATEMENT A. Approved for public release. Distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:44Z
Check the source to verify that this is the current version before use.

2.3 Schedule of sizes.

6-3/8	7	7-5/8
6-1/2	7-1/8	7-3/4
6-5/8	7-1/4	7-7/8
6-3/4	7-3/8	8
6-7/8	7-1/2	

3. SALIENT CHARACTERISTICS

3.1 Description. The beret wool (see Figure 1) shall be constructed from a one (1) piece knitted wool shell with no visible seams. Types I and II berets shall not be lined and Types III, IV, and V berets shall be fully lined with a polyester/cotton lining material. The beret shall have a felt cushion and binding around bottom opening with a drawcord inserted in leather or synthetic binding. The beret shall have a badge stay on the inside of beret. Types I, III, and V shall have a sewn on flash. Classes 2, 3, 4, 5, 6, 8, 9, and 11 shall have two (2) eyelets with a leather eyelet protector (see 3.2.5).

3.1.1 Figures. Figure 1 is furnished as required methods of measuring and figures 2 through 8 are furnished for informational purposes only. To the extent of any inconsistencies between the written document and the figure, the written document shall govern.

3.2 Materials.

3.2.1 Basic material. The material for the beret shell shall be knit from 100 percent woolen yarn consisting of 64's grade (average fiber diameter, 20.60 to 22.04 microns with a 5.19 micron maximum standard deviation) or finer blended wool. The shell shall be knit on a flat or circular reciprocating beret machine with 9 or 10 needles per inch. The knitted shell shall undergo a fulling and dyeing process. The shell shall be mothproofed in accordance with MIL-DTL-43665, except that the requirements for special markings shall not apply. The beret shall be blocked to size (see 3.12) and shall be shaped and sheared to a smooth finish. All loose fibers shall be removed. The finished shell material shall conform to the requirements specified in Table I when tested as specified in Table I.

3.2.2 Lining material. The material for lining the Types III, IV, and V berets and for encasing the badge stay for Types I and II shall be polyester and cotton conforming to Class 1 of A-A-52106. The cloth shall be dyed black.

3.2.3 Color. The color of the beret shell material shall be as specified in the contract or purchase order. The finished beret shall match the standard sample for shade and appearance and shall be equal to or better than the standard sample with respect to all characteristics for which the standard sample is referenced (see 7.9).

3.2.3.1 Visual shade matching. The color and appearance of the beret shall match the standard sample when viewed using the AATCC EP 9, Option C, (see 7.7) with a primary light source simulating the spectral quality of average daylight, CIE Illuminant D65, with a color temperature

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:44Z
Check the source to verify that this is the current version before use.

of 6500 (± 200) Kelvin (K) illumination of 100 (± 20) foot candles. Alternatively, the color and appearance of the beret shall match the standard sample with a primary light source simulating artificial daylight, CIE Illuminant D75, with a color temperature of 7500K (± 200) illumination of 100 (± 20) foot candles in lieu of D65 (see 7.7). The beret shall also be a good match to the standard sample with a secondary source simulating the spectral quality of incandescent lamplight, CIE Illuminant A, with a color temperature of 2856K (± 200).

3.2.4 Wool, felt cushion. The wool shall be a minimum of 45 percent wool yarn consisting of 48's grade 31.00-32.69 microns or finer blended wool. The finished wool felt cushion shall conform to the requirements specified in Table II when tested as specified in Table II. The color shall be gray.

3.2.5 Leather, binding. The leather binding for Types I, II, III and IV and eyelet protector Classes 2, 3, 4, 5, 6, 8, 9, 11 and 15, shall be full grain, vegetable tanned sheepskin or bovine that has been re-tanned so as to have perspiration resistance. The grain side of the leather shall have a medium luster, skiver grain embossed finish The leather shall be drum dyed to match Black 111. The leather shall be in conformance to the requirements listed in Table III when tested by the methods in Table III. As an alternative, a synthetic (faux) leather may be used for Classes 1, 7, 10, 12, 13 and 14 (see 3.2.4.1).

3.2.5.1 Synthetic (faux) leather, binding. Types I, II, III and IV, synthetic (faux) leather for the Classes 1, 7, 10, 12, 13 and 14 shall be 100 percent polyurethane face with a 100 percent polyester backing. It is a four (4) layer construction as follows: the first layer shall be a clear surface protection layer: clear polycarbonate polyurethane; the second layer shall be a color coating: black polycarbonate polyurethane; the third layer shall be a micro-porous foam layer: Polyurethane-based micro foam; and the fourth layer shall be a knit backing. The synthetic (faux) leather shall match shade Black 111. The synthetic (faux) leather shall be in conformance to the requirements listed in Table IV when tested by the methods in Table IV.

3.3 Requirements. The finished beret shall conform to the physical and colorfastness requirements specified in Tables I, II, III and IV when tested in accordance with applicable test methods.

TABLE I. Shell requirements.

Characteristic	Requirement	Test Method
Wool content (dry weight), percent (min.)	95	AATCC TM20A (see 7.4)
Wool grade (min.), 20.60 to 22.04 microns	64's	ASTM D3991
Colorfastness to: (min.)		
Light	3	AATCC TM16.3, Option 3 1/
Perspiration	3	AATCC TM15 2/
Water, color change	3	AATCC TM107 2/
Wet dry cleaning	3	AATCC TM132 2/
Crocking (wet and dry)	1.5	AATCC TM8 3/
Weight, oz/yd.^{2}	18.0 - 22.0	ASTM D3776/D3776M

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:44Z
Check the source to verify that this is the current version before use.

TABLE I. Shell requirements. - Continued

Characteristic	Requirement	Test Method
Bursting strength, lbf (min.)	45	ASTM D3787
Stiffness, cm. (bending length)	2.0 - 5.0	ASTM D1388, Option A

1/ Rated using AATCC EP1.
2/ Rated using AATCC EP1, Evaluation Procedure for Gray Scale for Color Change and AATCC EP2, Evaluation Procedure for Gray Scale for Staining.
3/ Rated using AATCC EP8, Evaluation Procedure for 9-Step Chromatic Transference Scale.

TABLE II. Felt requirements.

Characteristic	Requirement	Test Method
Wool content (dry weight), percent (min.)	45	AATCC TM20A (see 7.4)
Wool grade (min.), 31.00-32.69 microns	48's	ASTM D3991
Weight, oz/yd.^{2}	6.0 (± 0.25)	ASTM D3776/D3776M
Breaking strength, lbf (min.)	8	ASTM D5034
Thickness, ounces	0.065 (± 0.01)	ASTM D1777

TABLE III. Leather requirements.

Characteristic	Requirement	Test Method
Thickness, ounces	2 to 2-1/2 1/	ASTM D1814
Shrinkage temperature (min.)	185 °F (85 °C)	ASTM D6076
Blocking	At least 80% shall separate with ease and shall show no grain	ASTM D6116
Colorfastness to: (min.) Crocking (wet and dry)	4	ASTM D5053 2/
Staining (min.)	4	ASTM D6012 2/
Area stability of leather to: Perspiration, percent (min)	At least 80% shall have an area loss no greater than	ASTM D2322
Ash (moisture free), percent (max.)	5.0	ASTM D2617
pH (min.)	3.3	ASTM D2810
Chromic oxide (moisture free), percent (max.)	0.5	ASTM D2807
Stitch tear strength, lbs. (min.)	12	ASTM D4705
Oil/Grease content, percent (max.)	25	ASTM D3495

1/ As an alternate for the eyelet protectors only, the leather may be 1.5 to 2.0 ounces.
2/ Stain matching shall be done in indirect light and rated using AATCC EP8, Evaluation Procedure for 9-Step Chromatic Transference Scale.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:44Z
Check the source to verify that this is the current version before use.

TABLE IV. Synthetic (faux) leather requirements.

Characteristic	Requirement	Test Method
Thickness, inches (min.)	.040	ASTM D1777
Weight, oz/yd.^{2}	14.5 + 5	ASTM D3776/D3776M
Fabric count		
Wales, per inch	28 + 5	ASTM D3775
Courses, per inch	24 + 5	ASTM D3775
Breaking Strength		
Length	11	ASTM D1424
Width	22	ASTM D1424
Bursting Strength, lbf., face up (min.)	300	ASTM D6797
Bending, max.		
Length		
Face up	4	ASTM D1388
Face down	3.5	ASTM D1388
Width		
Face up	4	ASTM D1388
Face Down	4.5	ASTM D1388
Blocking, max.	1-2	ASTM D751
Stretch, percent, (max.), 5 lbs.		
Length	10	ASTM D6614
Width	15	ASTM D6614
Growth, percent (max.), 5 lbs.		
Length	1.5	ASTM D6614
Width	1	ASTM D6614
pH	5.5 to 8	AATCC 81
Colorfastness to: (min)		
Light	4-5	AATCC 16.3, Option 3 1/
Perspiration	4-5	AATCC 15 2/
Water, color change	4-5	AATCC 107 2/
Wet dry cleaning	4-5	AATCC 132 2/
Crocking (wet and dry)	4-5	AATCC 8 3/

1/ Rated using AATCC EP.
2/ Rated using AATCC EP1, Evaluation Procedure for Gray Scale for Color Change and AATCC EP2, Evaluation Procedure for Gray Scale for Staining.
3/ Rated using AATCC EP8, Evaluation Procedure for 9-Step Chromatic Transference Scale.

3.3.1 Cracking. At least 80 percent of the leather or synthetic (faux) leather binding specimens shall not crack when tested as specified in 3.3.1.1.

3.3.1.1 Cracking test method. One (1) 4 x 1-inch leather specimen shall be tested from each 8 x 8-inch sample unit. The specimen shall be folded upon itself in the lengthwise direction, grain side out. The folded specimen shall be folded upon itself again at right angles to the first

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:44Z
Check the source to verify that this is the current version before use.

fold. Examine the specimen along the folds and report any evidence of cracking. The fingers and thumbs shall be positioned 1/2-inch to 1-inch from the apex of the fold when test specimen is tested.

3.4 Drawcord. The drawcord shall be a nylon or polypropylene flat braid, 5/16-inch wide having 64 ends of 300 denier continuous filament nylon (see 3.5.1.3) and shall conform to the requirements in Table V when tested as specified in Table V. As an alternate, the braid may have 33 ends of 420 denier continuous filament nylon. The color shall be black.

TABLE V. Drawcord requirements.

Characteristic	Requirement	Test Method
Colorfastness to: Wet Drycleaning (minimum)	4	AATCC TM132
Width	5/16 (± 1/16)-inch	1/
Ends (per braid)	64	ASTM D3775

1/ Using a metal tape measure.

3.5 Thread. The thread shall conform to Type I (cotton-covered) or Type II (polyester-covered) polyester core, Tex 36-45 of A-A-50199. As an alternate Type I, Tex 50 or 60 conforming to A-A-52094 may be used. The thread color shall be black except that the needle thread color for stitching the flash to the beret (Types I, III and V), shall be a good match to the flash background color.

3.5.1 Stitches, seams and stitching. All stitching shall be in accordance with types specified in ASTM D6193. All 301 stitch types shall have 8-12 stitches per inch except for attaching of the leather binding, which shall have 6-10 stitches per inch. All 502 and 503 stitch types shall have 6 to 10 stitches per inch. Ends of all 301 stitch types shall be backstitched or overstitched not less than 1/2-inch except where ends are turned under or caught in other seams or stitching. Thread tensions shall be maintained so that there will be no loose or excessively tight stitching resulting in puckering. The lock stitch shall be imbedded in the materials sewn. All thread ends shall be trimmed to a maximum length of 1/4-inch.

3.5.1.1 Felt cushion. The beret shell shall have a 3/4 (± 1/8) inch wide felt cushion stitched to the inside bottom raw edge of the blocked shell with the ends of the felt overlapped not more than 1/2-inch using a 502 or 503 stitch type.

3.5.1.2 Binding. The Types I, II, III, and IV beret shell shall be bound with a leather or synthetic (faux) leather binding (Classes 1, 7, 10, 12, 13 and 14 only), and the Type V beret shell shall be bound with a 1-inch wide nylon binding tape. The ends of the Type V beret nylon binding tape shall be heat cut. The binding shall be stitched 1/16 to 1/8-inch from edge of binding through both the shell and felt cushion and sewn with a 301 stitch type (see 3.2). The leather binding for Types I, II, III, and IV, shall be sewn grain side up. The binding ends shall have a 1/2 (± 1/8) inch overlap at seamed edge with a notched opening, toward folded edge, on outside of beret to

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:44Z
Check the source to verify that this is the current version before use.

allow drawcord ends to extend out of binding at center back (±1/4) inch off center tolerance) of beret (see Figures 2 and 3). The ends of the notched opening shall abut (+0, -1/8) inch together. The binding shall finish smooth and uniform in width.

3.5.1.3 Drawcord. A drawcord shall be threaded through the binding and shall not be caught in the stitching of the binding and shall move freely through the binding to allow for adjustment (see 3.7). Both ends of the drawcord shall extend beyond the binding opening at center back of beret a minimum of 5-inches drawcord ends shall be finished to prevent fraying and shall be tied in a bow at the back.

3.5.1.4 Badge stay. The beret shall have a badge stay positioned on the inside of the left front with one end extending 1 (± 1/4) inch to the right of center front and the bottom edge of the badge stay shall be positioned 3/4 to 7/8-inch from the bottom folded edge of the leather binding on the finished beret (see Figure 5). Types I and II beret badge stay shall be encased in lining material with the bottom edge of the lining material sewn in the stitching of the binding and positioned as specified above. For Types III, IV and V, the badge stay shall be positioned as specified above to the underside of the lining and stitched on all sides 1/8 to 1/4-inch from the edge of badge stay with a 301 stitch type.

3.6 Tape. The tape for the Type V beret's binding shall be a nylon, plain weave, non-critical use (shuttle or shuttleless loom), nylon 66, and 1 (± 1/32) inch in width. The color of the tape shall be black.

3.7 Eyelets. The eyelets for Classes 2, 3, 4, 5, 6, 8, 9, and 11 (see Figure 5) shall be brass or aluminum and shall have a black enamel finish. The diameter of the barrel shall be 0.250 (± 0.015) inch and the length under the head shall be 0.156 (± 0.015) inch.

3.8 Badge stay. The badge stay shall be medium density, water resistant, latex resin-inorganic filler compound saturated needle punch polyester nonwoven. The thickness of the polyester non-woven shall be 0.072 (± 0.003) when tested in accordance with ASTM D1777. The color of the finished badge stay shall be natural (tan). The badge stay shall not curl, nor show any sign of separation. The badge stay shall not shrink more than 1.5 percent in any direction when tested in accordance with AATCC TM135, (3)(V)(D).

3.8.1 Water resistance. The badge stay shall be tested for water resistance as follows: a drop of distilled water shall be placed on the surface of the badge stay board and shall not be completely absorbed in 1 hour. Three determinations shall be made per sample unit (see 5.3) and the results reported as "pass" or "fail".

3.9 Flash (Types I, III, and V). The flash shall be in accordance with the requirements specified in the contract or purchase order or they shall be provided as Government furnished materials. The Classes 2, 11, and 13, beret shall have a flash in accordance with the following drawings, (see Figures 6, 7, and 8):

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:44Z
Check the source to verify that this is the current version before use.

For Class 2: Drawing Number A-4-174: Air Force Security Forces – Officer.
For Class 11: Drawing Number A-4-173: Air Force Security Forces – Enlisted.
For Class 13: Drawing Number A-4-269: Army JROTC.

3.10 Combination size, identification, instruction label. Each beret shall have a white, commercial type, combination size, identification, instruction label sewn into the stitching of the binding positioned 1-inch from the center back of the beret on the inside. The label's inscription shall have a minimum font size of 10 points and shall show "good" colorfastness to wet dry cleaning when tested in accordance with AATCC TM132. When using either leather or synthetic (faux) leather for the binding material, it shall be identified on the label. The label shall also include the following information:

Beret, Wool Size: 6-7/8 (example) 100% Wool, Leather or Synthetic (Faux) Leather (example) NSN: 8405-00-000-0000 (example) Name of Contractor: Contract No.: Dry Clean or Spot Clean Only

3.10.1 Barcode hang tag. Each beret shall have a barcode label/hangtag conforming to Type VIII, Class 17 of MIL-DTL-32075. The barcoding element shall be a 13-digit National Stock Number (NSN). There shall be a 12-digit Universal Product Code (UPC) number assigned for all NSNs by the contracting activity. The initials "UPC" must appear beneath the code. The barcode for NSN and UPC type shall be a medium to high density and shall be located so that it is completely visible on the beret when it is folded and/or packaged as specified and so it causes no damage to the beret.

3.10.1.1 Care instruction note. Each beret shall have a white, commercial-type, printed paper note enclosed with each beret with the following information:

Brush the beret regularly with a clean damp cloth to remove loose soil and lint. Wipe the beret in short, directional strokes working from one side of the beret to the other side. Allow the beret to dry completely before wearing it.

3.11 Patterns. The Government shall furnish the graded pattern for the lining and the pattern for the badge stay. The pattern generally provides for a seam allowance of 1/4-inch. The Government patterns shall be used to create the contractor's working patterns. Minor pattern modifications are permitted to accommodate manufacturing procedures; however, the design and finished measurements must be obtained. Pattern guidelines shall not be modified. Adhesive patterns are prohibited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:44Z
Check the source to verify that this is the current version before use.

3.11.1 Pattern parts. The pattern parts for the beret lining for Types III, IV, and V, pattern part for Types I and II badge stay lining and the pattern part for the badge stay for all beret types shall be cut from the materials specified in accordance with pattern parts and cut quantity specified below in Table VI.

TABLE VI. List of pattern parts.

Material	Nomenclature	Pattern Abbreviation	Cut parts
Linings	Crown, Types III, IV, and V	CROWN_LIN	1
	Body, Types III, IV, and V	BODY_LIN	2
	Crown interlining, Types III, IV, and V	CRWN_INTLN	1
	Badge stay lining, Types I and II	STAY_POCKET	2
Badge stay	Badge stay, all types	BADGE_STAY	1

3.12 Finished measurements. The beret wool shall conform to the measurements specified in Table VII below.

TABLE VII. Finished measurements (in inches) (all types). 1/

SIZE	Circumference A/	Crown Length B/	Crown Width C/	Front Quarter D/	Back Quarter E/	Right and Left Quarter F/
6-3/8	20-1/8	9-5/8	9-1/8	3	2-1/2	2-3/4
6-1/2	20-1/2	9-3/4	9-1/4	3	2-1/2	2-3/4
6-5/8	20-7/8	9-7/8	9-3/8	3	2-1/2	2-3/4
6-3/4	21-1/4	10	9-1/2	3	2-1/2	2-3/4
6-7/8	21-5/8	10-1/8	9-5/8	3	2-1/2	2-3/4
7	22	10-1/4	9-3/4	3	2-1/2	2-3/4
7-1/8	22-3/8	10-3/8	9-7/8	3	2-1/2	2-3/4
7-1/4	22-3/4	10-1/2	10	3	2-1/2	2-3/4
7-3/8	23-1/8	10-5/8	10-1/8	3	2-1/2	2-3/4
7-1/2	23-1/2	10-3/4	10-1/4	3	2-1/2	2-3/4
7-5/8	23-7/8	10-7/8	10-3/8	3	2-1/2	2-3/4
7-3/4	24-1/4	11	10-1/2	3	2-1/2	2-3/4
7-7/8	24-5/8	11-1/8	10-5/8	3	2-1/2	2-3/4
8	25	11-1/4	10-3/4	3	2-1/2	2-3/4
Tolerance	±3/16	±1/2	±3/8	N/A	N/A	N/A

1/ Unless otherwise specified the methods of measuring referenced below and in Figure 1 shall be taken as follows:

A/ Circumference: Lay the beret flat on the table with head opening facing up. Measure inside beret circumference around bottom folded edge of binding on the finished beret.

B/ Crown Length: Mark the front and back quarter locations in accordance with instructions in

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:44Z
Check the source to verify that this is the current version before use.

footnote D/. Lay the beret flat on the table with head opening facing down. Measure from Front Quarter mark to Back Quarter mark following the contour of the beret. Crown length is indicated by "B" in Figure 1.
C/ Crown Width: Mark the Right and Left quarter locations in accordance with instructions in footnote D/. Lay beret flat on the table with head opening facing down. Measure from Left Quarter mark to Right Quarter mark following the contour of the beret. Crown width (perpendicular to the length measurement) is indicated by "C" in Figure 1.
D/ Front, Back, Right and Left Quarters: Identify location of each Quarter as indicated in Figure 1; Front Quarter is indicated by "D", Back Quarter is indicated by "E" and Right and Left Quarters are indicated by "F". Measure the length from Table VII of each quarter from folded edge of binding. Mark the finished location of each quarter with a straight pin.

NOTE: All measurements shall be taken using a flexible metal tape measure and all measurements shall be taken after all packaging material has been removed.

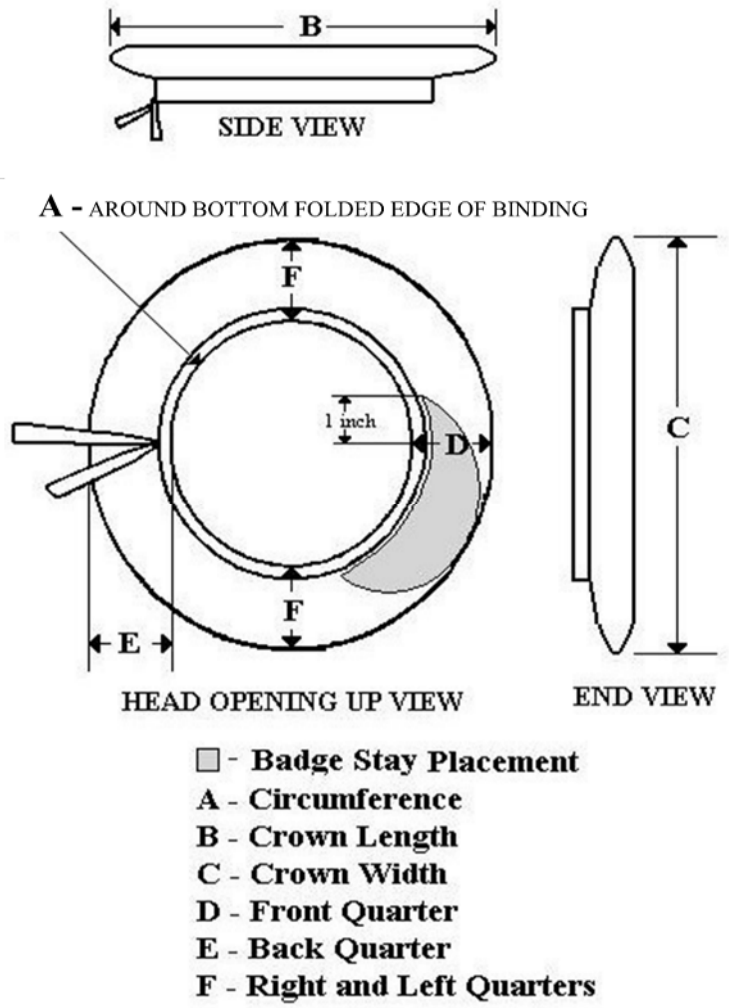


FIGURE 1. Finished Beret, Wool – Methods of Measuring.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:44Z
Check the source to verify that this is the current version before use.

3.13 Toxicity. Unless otherwise specified in the contract or procurement documents, the finished beret wool shall not present a health hazard and shall show compatibility with prolonged, direct skin contact when tested as specified in 3.13.1.

3.13.1 Toxicity test. When the toxicity requirement (see 3.13) can be demonstrated with historical use data, on the finishing treatments used, toxicity testing may not be required, (see 7.1.4 and 7.9).

3.14 Workmanship. The finished beret wool shall conform to the quality of the product established in this document. The beret shall be free from defects which would affect its serviceability, appearance, uniformity and quality assurance standards defined by the technical data in the procurement documents.

4. REGULATORY REQUIREMENTS. Unless otherwise specified, the offeror/contractor is encouraged to use recovered, recycled, bio based, and environmentally preferable materials to the maximum extent practicable, in accordance with paragraph 23.403, 23.404(b) of the Federal Acquisition Regulation (FAR), or the sustainable acquisition of EO 13834; as applicable. (See 7.1.2).

5. PRODUCT CONFORMANCE PROVISIONS.

5.1 Product conformance. The beret shall meet the salient characteristics of this Commercial Item Description, conform to the producer's own drawings, specifications, standards, and quality assurance practices, and be the same product offered for sale in the commercial marketplace. The Government reserves the right to require proof of such conformance.

5.2 Market acceptability. The finished wool beret offered must have been sold to the government or commercial market.

5.3 End item inspection procedures. Sampling for inspection shall be conducted in accordance with ASQ/ANSI Z1.4 - Sampling Procedures and Tables for Inspection of Attributes (see 7.2.2).

5.4 Visual examination. Each finished beret wool shall be examined for the defects listed in Table VIII as defined in ASTM D3990. The lot size shall be expressed in units of beret. The sample unit shall be one (1) beret wool.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:44Z
Check the source to verify that this is the current version before use.

TABLE VIII. Defects.

Material defects: Any hole, cut, tear, permanent fold, pleat, or crease; any spot or stain on outside, discoloration or color not as specified, any outwardly visible part shaded, any serious material defects or objectionable odor.
Stitches, seams and stitching: Loose or tight stitching tension, broken or skipped stitches, needle chew, any part caught in an unrelated operation or stitching, raw edge, thread ends not removed, any seam slippage, re-stitching, pleating or puckering; distorted, open, pulled or snagged stitches, twisted, ragged or inconsistent edge.
Workmanship: Any component part omitted, twisted, not specified size, missing, misplaced or distorted parts; poorly shaped, any dimension of item not as specified; design not as specified. Failure to meet product conformance; serviceability, reliability and quality of materials as defined by this document.
Labels: Label(s) missing, incorrect, or illegible; bar code or UPC code label omitted or not readable by scanner; human-readable interpretation (HRI) omitted or illegible; bar code not visible on folded packaged item, bar code label causes damage to the item.
Packaging: Not packaged in accordance with the contract or procurement documents.

5.5 Component and material inspection. The materials and components of the beret shall conform to the requirements cited in this commercial item description. The lot shall be unacceptable if one (1) or more sample units fail to meet any of the test requirements specified. The lot size expression and the sample size shall be in accordance with the following:

Component	Lot size expressed as	Sample unit for testing
Shell	Shells	12 Shells
Badge stay	Pounds	3 square yards
Bindings	Yards	1 yard
Braid	Yards	1 Yard

5.6 Dimensional examination. The finished beret wool shall conform to the dimensions specified in Table VII when measured as stated. Any dimension that is not within the established tolerance shall be classified as a defect. The sample unit shall be one (1) beret wool.

5.7 Acceptance criteria. Acceptance criteria shall be as specified in the contract or procurement documents.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:44Z
Check the source to verify that this is the current version before use.

6. PACKAGING. The preservation, packing and marking shall be as specified in the contract or purchase order (see 7.9).

7. NOTES.

7.1 Source of Government documents.

7.1.1 Copies of Government documents are available online at https://quicksearch.dla.mil.

7.1.2 EPA information is available online at https://www.epa.gov and EO 13834 information is available online at https://www.fedcenter.gov/.

7.1.3 Federal Acquisition Regulations (FAR) are available online at https://acquisition.gov

7.1.4 Toxicity testing. If dermal toxicity testing is required, it will be conducted in accordance with Title 40, Protection of Environment, Code of Federal Regulations current edition and applicable sections, which are also consistent with the following OECD tests: https://www.ecfr.gov/current/title-40.

Skin Sensitization 406 and Dermal Irritation 404 (https://www.oecd-ilibrary.org/environment/oecd-guidelines-for-the-testing-of-chemicals-section-4-health-effects_20745788?page=1).

Dermal Sensitization (https://www.law.cornell.edu/cfr/text/40/798.4100).
Dermal Toxicity (https://www.law.cornell.edu/cfr/text/40/798.2250).

7.2 Source of non-Government documents.

7.2.1 AATCC test methods are available for purchase online at https://www.aatcc.org.

7.2.2 ASQ/ANSI Z1.4 – Sampling Procedures are available online at https://www.asq.org.

7.2.3 ASTM Standards are available for purchase online at https://www.astm.org.

7.3 Intended use. This beret is intended to be worn by male and female military personnel.

7.4 Standard samples. For access to standard shade samples of the shell material, address the contracting activity issuing the invitation for bids or request for proposal.

7.5 Shade.

7.5.1 Visual shade matching. In 2017, Option A of AATCC EP9 was changed to Option C. NOTE: In case of confusion, the viewing geometry should be “The specimen plane and illumination source will be parallel to each other and aligned so that the light flux is incident at the center of the specimen plane, which is set at a 35 (± 5º) angle relative to the horizontal. The observer will view the specimens at a 90º angle, relative to the plane of the specimens”.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:44Z
Check the source to verify that this is the current version before use.

7.5.2 In 2022, the U.S. Military (All Services) accepted D65 as the new preferred light source for visual shade matching due to the supply chain issues with D75. DD1222's should reflect which light source is used. If the light source is not indicated on the DD1222, D65 will be assumed by the Government Shade Laboratory.

7.6 Certificate of compliance. The contracting activity may select to accept a certificate of compliance for stated requirement.

7.7 Superseding documents. This CID supersedes Purchase description CR-PD PD-01-09 dated July 30, 2001 and includes the addition of Classes 10 to 15. This CID was originally titled "Beret, Man's, Wool", under A-A-55184 and revision A removed the word "Man's" as it is now considered a unisex item.

7.8 Changes from previous issue. Marginal notations are not used in this revision to identify changes with respect to previous issues due to the extensiveness of the changes.

7.9 Ordering data. Acquisition documents should specify the following:

a. Title, number, and date of this CID
b. Types, Classes and Sizes required (see 2)
c. Color required (see 3.2.3)
d. Labeling information (see 3.10)
e. When toxicity testing is required (see 3.13)
f. Product conformance (see 5)
g. Acceptance criteria (see 5.7)
h. Packaging requirements (see 6)

7.10 Key words.

Badge Stay
Clothing
Flash
Headwear

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:44Z
Check the source to verify that this is the current version before use.

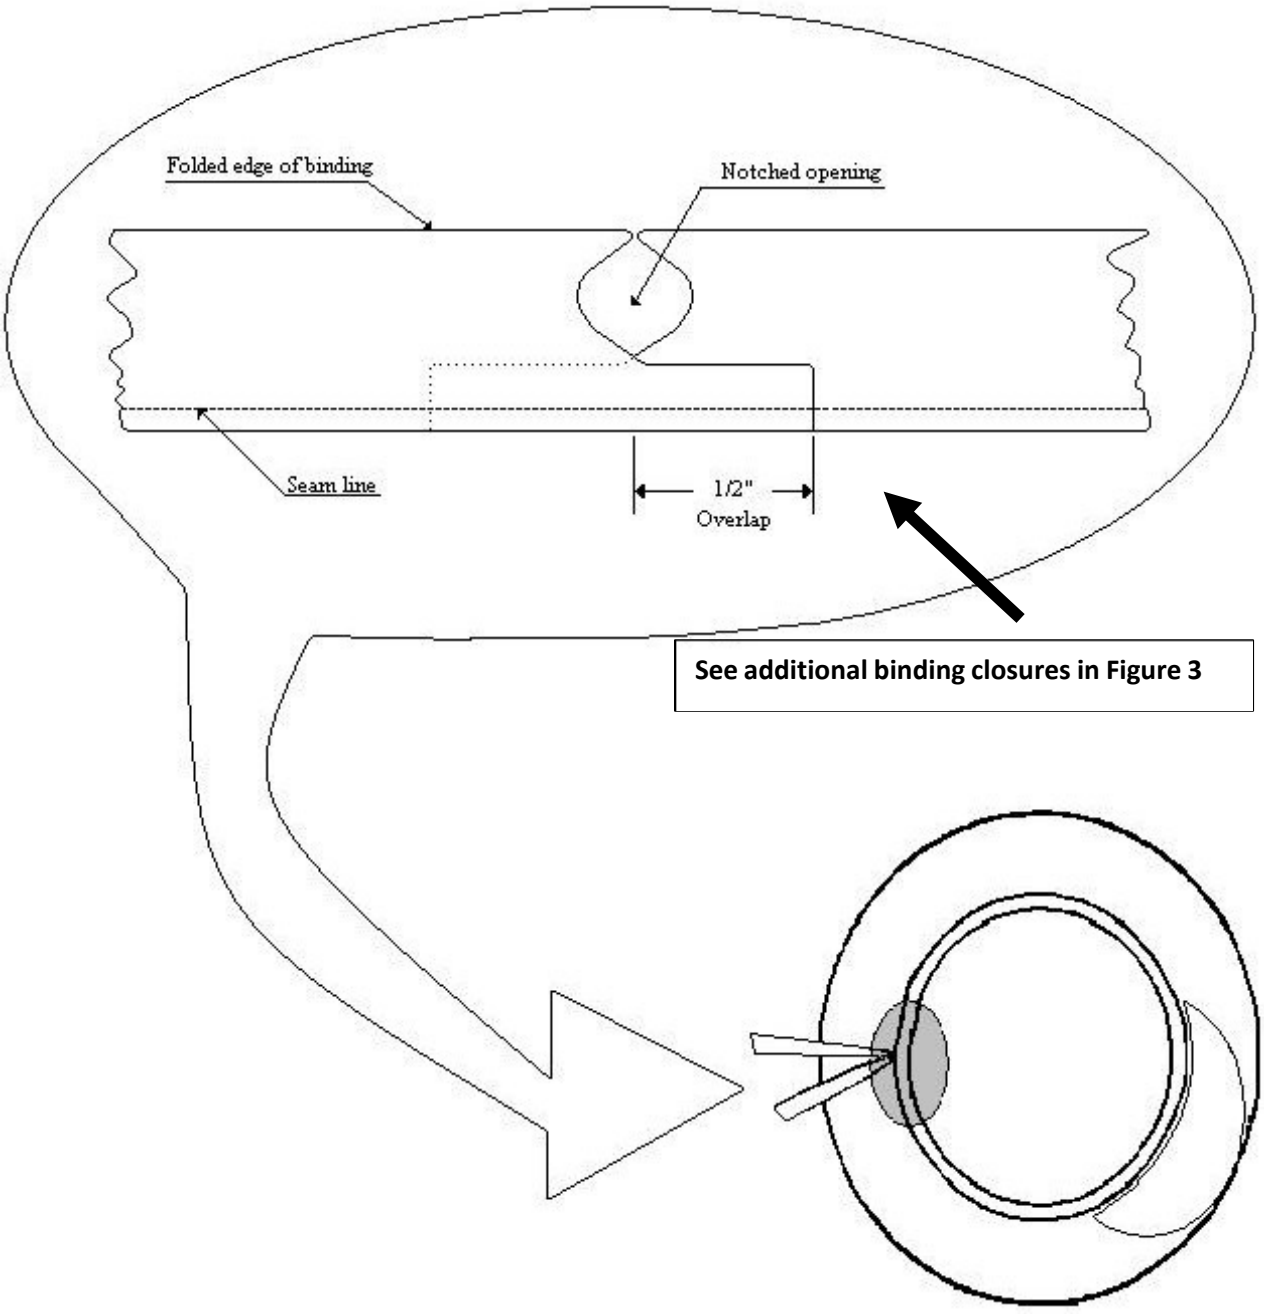


FIGURE 2. Close up of binding closure.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:44Z
Check the source to verify that this is the current version before use.

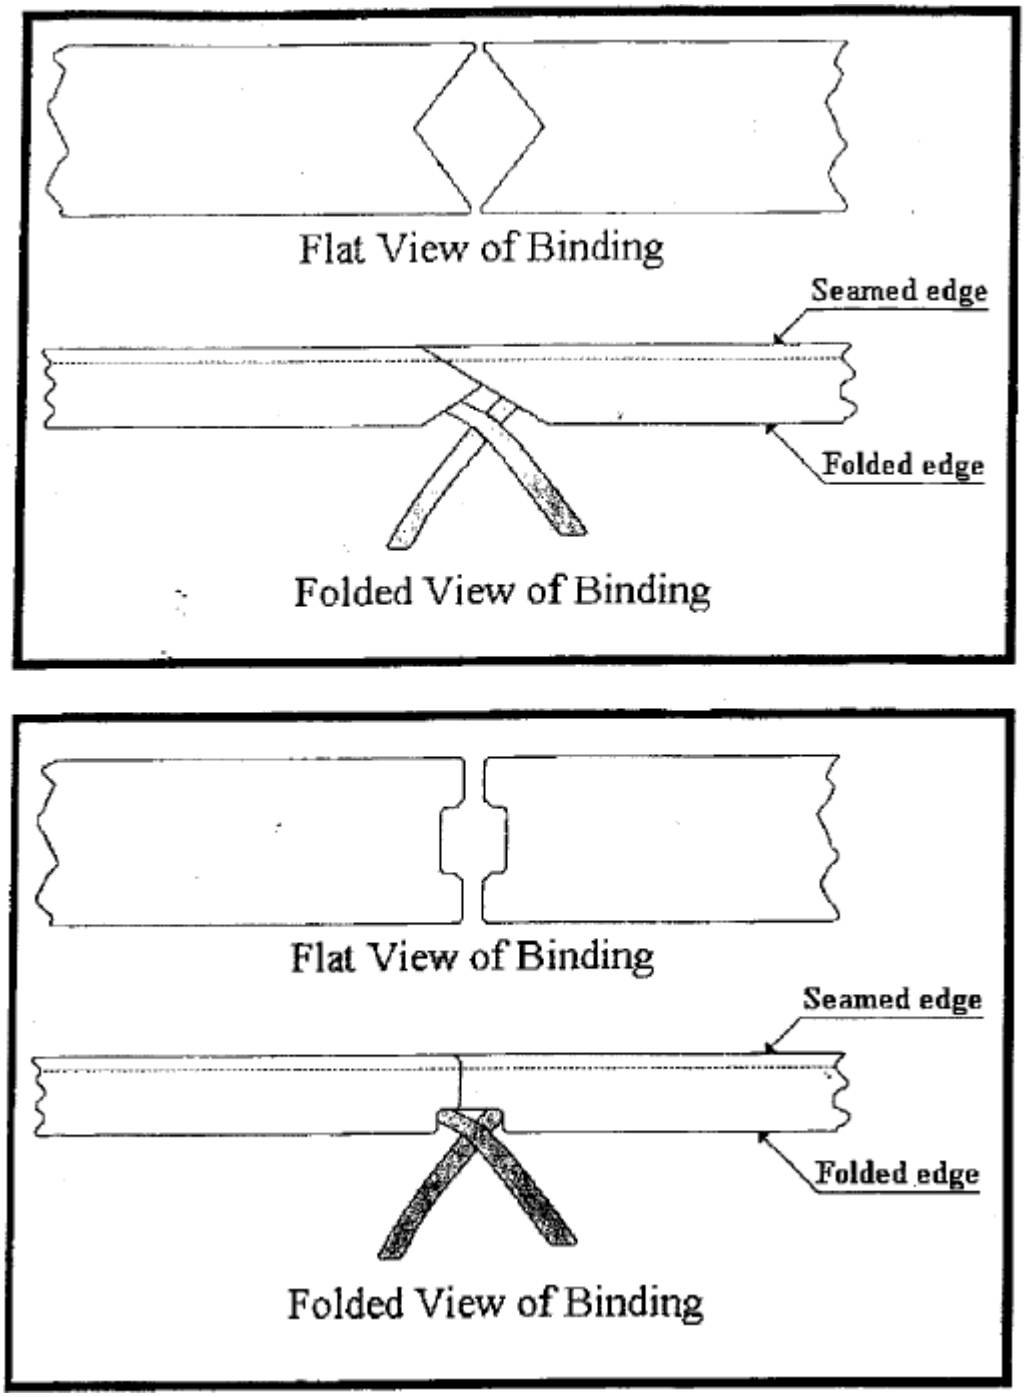


FIGURE 3. Close up of additional acceptable binding closures.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:44Z
Check the source to verify that this is the current version before use.

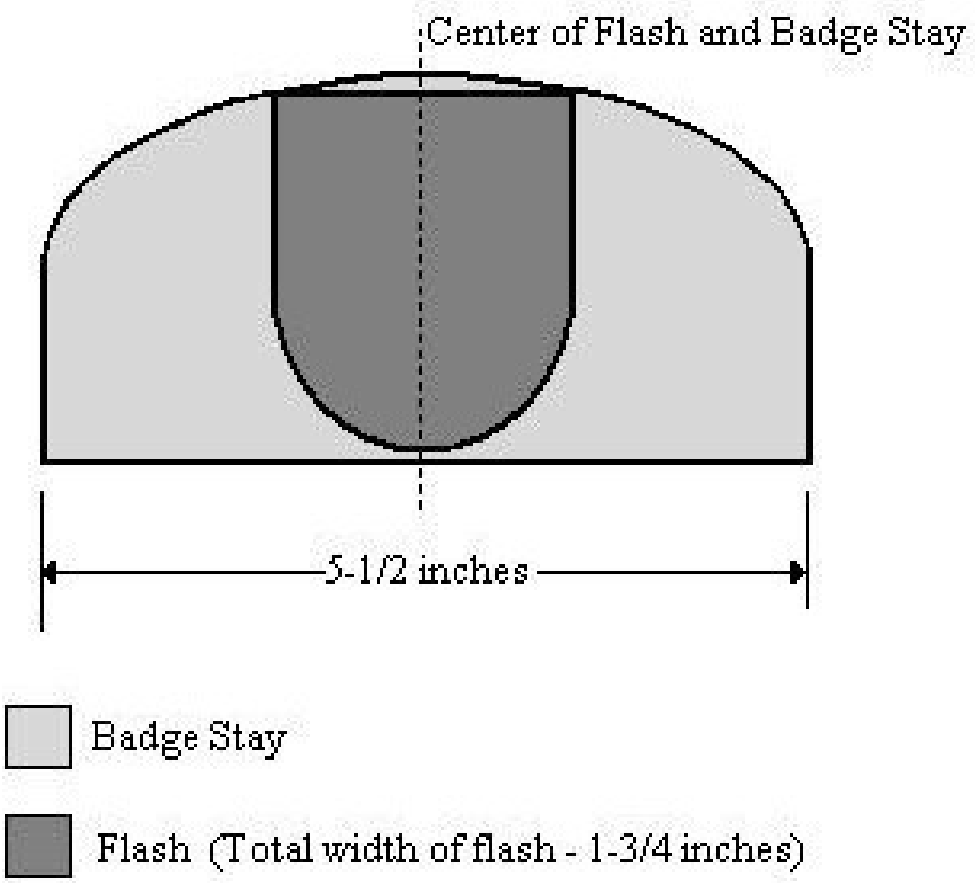


FIGURE 4. Badge stay, with flash placement.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:44Z
Check the source to verify that this is the current version before use.


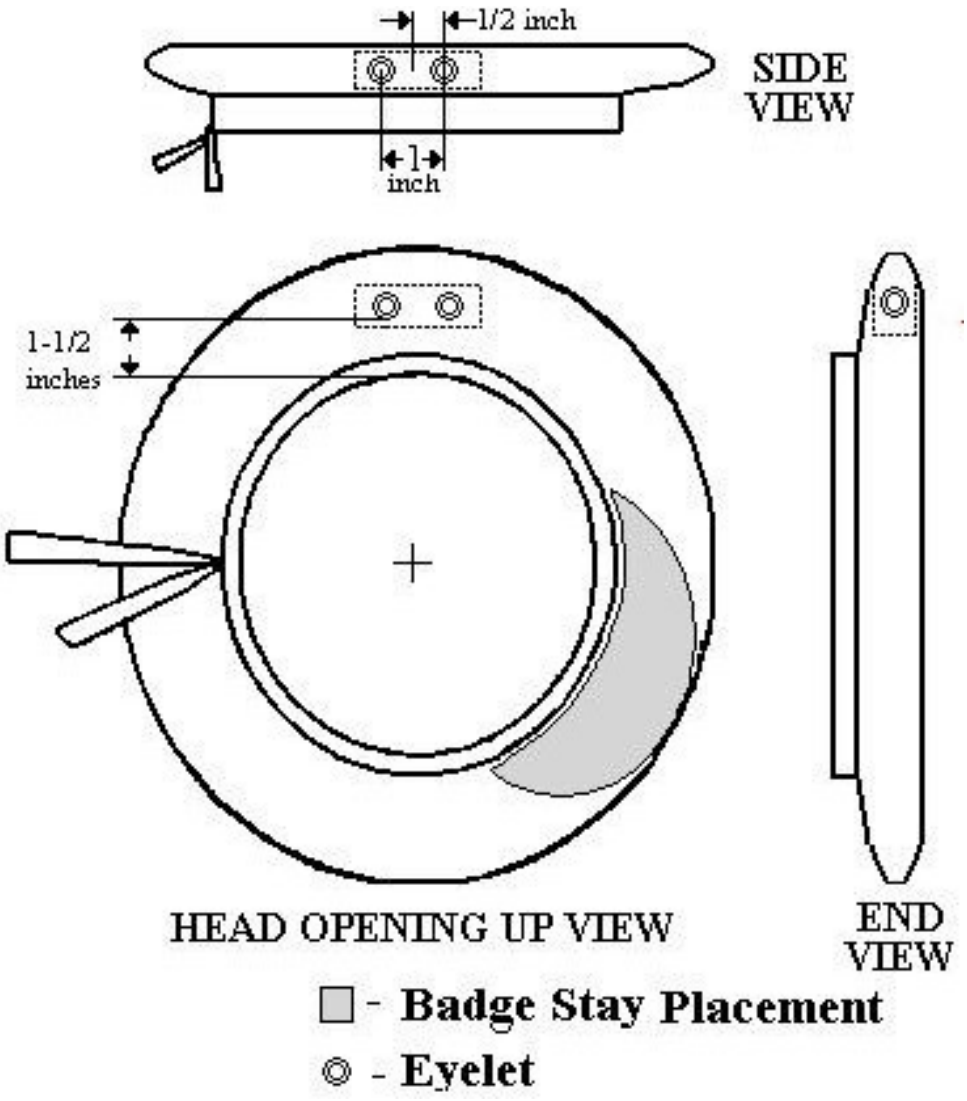


FIGURE 5. Eyelet position for Classes 2, 3, 4, 5, 6, 8, 9, and 11.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:44Z
Check the source to verify that this is the current version before use.

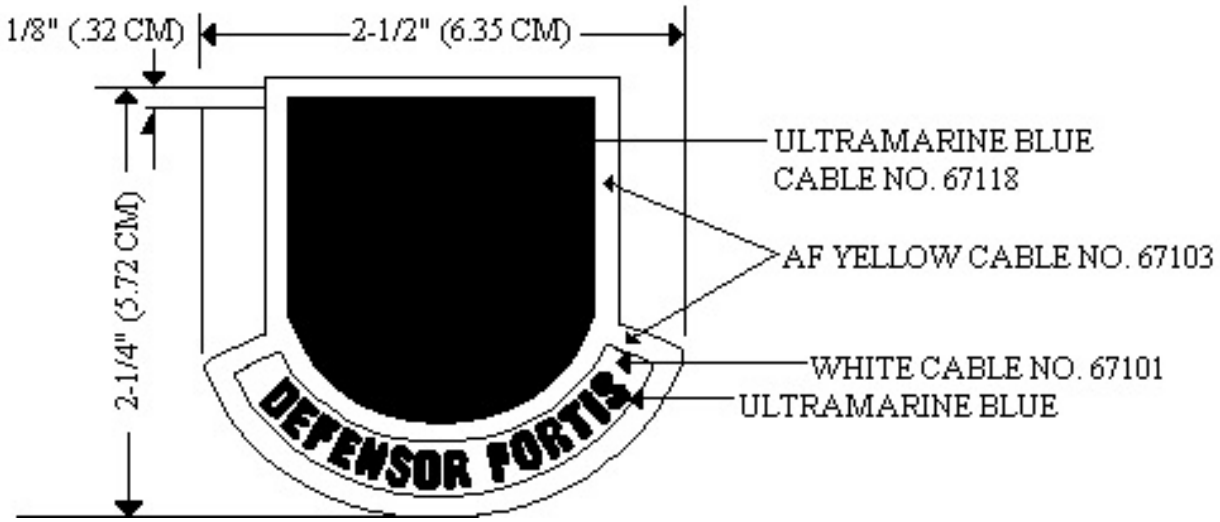

DESIGNED FOR OVEREDGE STITCHING

SUBDUED NOTES BORDERS AND LETTERS TO BE BLACK CABLE NO. 67138
SCROLL TO BE OLIVE DRAB CABLE NO. 67133

COLOR CONVERSION OF SHIELD
ULTRAMARINE BLUE TO BE- FLAG BLUE CABLE NO.67124

4289 STITCHES (MINIMUM)
100/2 DENIER
12/4 SPAN


Materials to be manufactured in accordance with MIL-DTL-14652

(Illustration of Drawing A-4-174)

AIR FORCE SECURITY FORCES - OFFICER

FIGURE 6. Flash for Beret (Class 2) - Air Force, Officers.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:44Z
Check the source to verify that this is the current version before use.

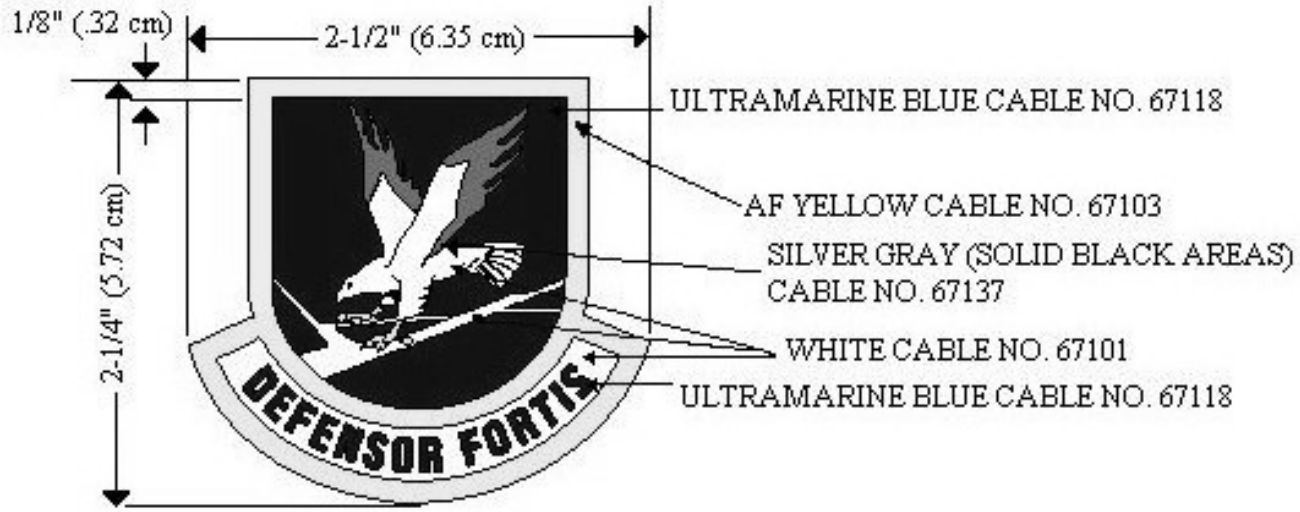

DESIGNED FOR OVEREDGE STITCHING

SUBDUED NOTES BORDERS AND LETTERS TO BE BLACK CABLE NO. 67138
SCROLL TO BE OLIVE DRAB CABLE NO. 67133

COLOR CONVERSION OF SHIELD
ULTRAMARINE BLUE TO BE - FLAG BLUE CABLE NO.67124
AF YELLOW TO BE – SPRUCE GREEN CABLE NO. 67130
SILVER GRAY TO BE – SPRUCE GREEN CABLE NO. 67130
WHITE TO BE – OLIVE DRAB CABLE NO 67133

5874 STITCHES (MINIMUM)
100/2 DENIER
12/4 SPAN


Materials to be manufactured in accordance with MIL-DTL-14652

(Illustration of Drawing A-4-173)

AIR FORCE SECURITY FORCES – ENLISTED

FIGURE 7. Flash for Beret (Class 11) - Air Force, Enlisted.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:44Z
Check the source to verify that this is the current version before use.

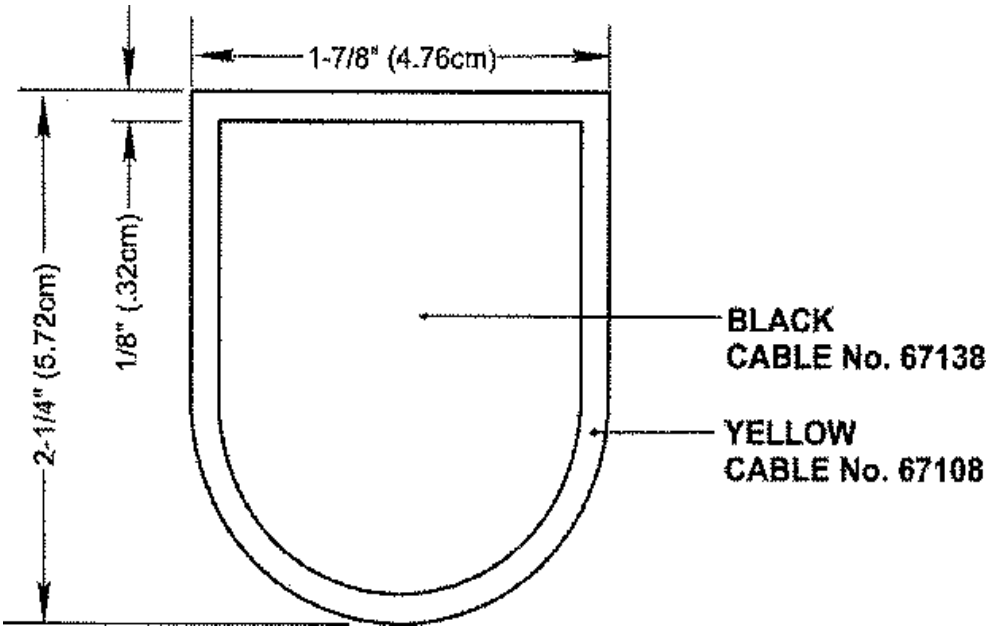

DESIGNED FOR OVEREDGE STITCHING

3467 STITCHES (MINIMUM)
90/2 DENIER
8/4 SPAN

(Illustration of Drawing A-4-269)

FIGURE 8. Flash for Beret (Class 13) – Army JROTC.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:44Z
Check the source to verify that this is the current version before use.

MILITARY INTERESTS:

CIVIL AGENCY COORDINATING ACTIVITY
GSA-FAS

Custodians:
Army - GL
Air Force - 11

Preparing Activity:
DLA - CT

(Project: 8405-2026-001

NOTE: The activities listed above were interested in this document as of the date of this document. Since organizations and responsibilities can change, you should verify the currency of the information above using ASSIST Online database at https://assist.dla.mil.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:44Z
Check the source to verify that this is the current version before use.