INCH-POUND

A-A-55210

27 May 1993

COMMERCIAL ITEM DESCRIPTION

SLACKS, WOMEN'S, UNDRESS

The General Services Administration has authorized the use of this Commercial Item Description in preference to MIL-S-87013.

Abstract. This Commercial Item Description covers the requirements for the women's polyester/cotton undress slacks worn by female personnel of the Coast Guard.

SALIENT CHARACTERISTICS

General Description. The slacks shall be of single needle construction with a two section sewn on waistband, belt loops, hook and eye closure, a right over left front fly with slide fastener, two quarter top pockets, flared legs, unfinished bottoms and double welt back hip pockets with button and buttonhole on left hip pocket (reference figure 1).

Beneficial comments (recommendations, additions, deletions) and any pertinent data which may be of use in improving this document should be addressed to: Defense Personnel Support Center, Clothing and Textiles Directorate, Attn: DPSC-FSSC, 2800 South 20th Street, Philadelphia, PA 19101-8419, by using the Standardization Document Improvement Proposal (DD Form 1426) appearing at the end of this document, or by letter.

AMSC N/A

FSC 8410

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:44Z
Check the source to verify that this is the current version before use.

The seat seam shall be stitched with a double needle seat seamer, with an outlet in the back seat seam. The slacks shall have 2 uncut front waist darts and 4 uncut back waist darts. All exposed edges and the top of the front and back shall have over-edge stitching.

The two section waistband shall be made of basic material with an interlining and lining. The finished width shall be 1-3/4 (± 1/8) inches with a topstitch 1/16 inch from waist seam through waistband, bottom of belt loops and lining. The left front fly shall be lined from the top of the waistband to approximately 1/2 inch beyond inseam.

The slacks shall have 5 belt loops for sizes up to and including 12, 7 loops for size 14 and above. The belt loops (with the exception of the center back loop) shall be sewn into the waist-band seam and waistband lining seam. The center back belt loop shall be centered over the seat seam, with the ends folded under and bartacked to pant. The top folded edge shall be even with the top of the waistband, and the belt loop opening shall finish 1-3/4 (± 1/8) inches between bartacks. The finished belt loops shall be 5/8 to 3/4 inch wide. The placement of the belt loops shall be as follows:

a loop in the center of the right and left fronts,
a loop adjacent to each side seam on back,
a loop centered on back seat seam,
a loop in the center of the right and left backs (for sizes 14 and above)

The quarter top side pockets shall be bartacked above and below the opening, which shall measure 5-3/8 to 5-5/8 inches. The front of pocket opening shall be topstitched 1/4 to 3/8 inch from edge, extending from top raw edge of slacks to bottom bartack; and 1/16 from edge above upper bartack through front and pocket bearer. Side pocket facing and bearer pieces shall be of basic fabric. The combination label shall be sewn on all four sides to the outside bottom of the right side pocketing, with the label facing the slacks when worn.

The double welt back hip pocket shall finish 5-1/4 (± 1/8) inches wide and 6-1/4 (± 1/4) inches deep, with evenly matched welt edges of 1/8 to 3/16 inch on each slack.

The left hip pocket shall have a vertical buttonhole centered 3/16 to 5/16 inch below the lower welt seam. The buttonhole shall be an eyelet-end, cut after, taper-bar type worked over gimp with the end securely tacked. The finished cut length of the buttonhole shall be 5/8 to 3/4 inch.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:44Z
Check the source to verify that this is the current version before use.

All bartacks shall be made by machine, and shall finish 3/8 (± 1/16) inch long and 1/8 (±1/16) inch wide. The back hip pockets shall have vertical bartacks at both ends. The base of the fly opening shall have a bartack at the junction of the crotch seam and on the "J" stitching line, which shall not extend beyond the crotch seam.

The finished slacks shall be pressed at the top; the legs pressed and creased in the center with the seams matching at the bottoms and knees. The inseam in the crotch may be slightly back of the outside seam.

Basic Material. The basic material for the slacks shall be a 50% polyester/50% combed cotton, 2/1 right hand twill cloth consisting of a 2 ply warp yarn and a singles filling. The polyester yarn shall be semi-dull, with a 2.5 maximum denier, and a staple length of approximately 1-1/2 inches. The cloth shall be preshrunk, dyed shade Blue 3362 and treated with a crease resistant finish. The finished cloth shall conform to the requirements specified in Table I when tested as specified.

Lining. The material for the waistband lining, left fly lining and pocketing shall be black 2/1 twill or plain weave, with a minimum weight of 4.3 oz./sq. yd. when tested as specified in ASTM Method D3776-85, Option C (a 15% minus tolerance will be permitted for 100% polyester cloth). The spun yarn for the cloth shall contain from 47% to 100% polyester with the remainder cotton or rayon. When 100% polyester fabric is used, the yarn shall be either staple or texturized filament polyester.

Waistband Interlining. The material for interlining the waistband shall be black, bleached or unbleached cotton buckram conforming to type II of A-A-50186. As an alternate, a nonwoven interlining conforming to type V of A-A-50186 may be used.

Waistband Stabilizer. The material for the waistband stabilizer shall be an unbleached plain weave consisting of polyester, cotton, or any combination of these fibers. The color shall be natural, and the finished material shall conform to the requirements specified in Table II when tested as specified.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:44Z
Check the source to verify that this is the current version before use.

TABLE I - BASIC MATERIAL REQUIREMENTS

Characteristic	Test Method	Requirement (Minimum)
Fiber identification	1/	As stated above
Weight	ASTM Method D3776-85 Option C	6.8 oz./sq. yd.
Yarns per inch	ASTM Method D3775-85	102 ends/inch 50 picks/inch
Breaking strength	ASTM Method D5034-90	170 lbs. warp 85 lbs. filling
Colorfastness to light	AATCC 16-1990 Option A	"Good" 2/3/
Colorfastness to perspiration	AATCC 15-1989	Class 4 3/
Colorfastness to crocking	AATCC 8-1989	Munsell value 8.5 4/3/
Colorfastness to laundering	AATCC 61-1989 test 3A	Class 4 5/6/3/
Dimensional stability	AATCC 96-1988 Washing method Vc Drying method D	2.0% Max. warp & 2.0% Max. filling 7/8/

1/ Unless otherwise specified, a certificate of compliance shall be submitted and will be acceptable for the stated requirements.
2/ Exposure time of 20 hours
3/ Or shall show colorfastness equal to the standard sample.
4/ Munsell scale
5/ 3 complete cycles, specimens must be dried after each cycle.
6/ Use 10 steel balls and multifiber test fabric.
7/ Test piece shall measure 22 x 22 inches with 18 inch benchmarks.
8/ The dampened specimens shall be pressed with a flatbed press as described in section 5.2 or a hand iron as described in section 5.10 at a temperature of 275° to 300° F. Section 7.4 shall not apply.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:44Z
Check the source to verify that this is the current version before use.

TABLE II - WAISTBAND STABILIZER REQUIREMENTS

Characteristic	Test Method	Requirement (Minimum)
Weight	ASTM Method D3776-85 Option C	6.3 oz./sq. yd.
Thickness	ASTM Method D1777-64	0.026 ± 0.006 inch
Stiffness (filling dir.)	ASTM Method D1388-64 Option A	min. 0.100 max. 0.200 inch/lbs.
Dimensional stability	AATCC 96-1988 Washing Method Ic Drying Method D	2.0% Max. warp 1/2/

1/ Test piece shall measure full width of stabilizer and 22 inches long.
2/ The dampened specimens shall be pressed with a flatbed press as described in section 5.2 or a hand iron as described in section 5.10 at a temperature of 275° to 300° F. Section 7.4 shall not apply.

Slide Fastener. The slide fastener for closing the front fly shall be non-separating, non-reversible, with a cam lock slider, short tab pull and bottom stop. The size shall be light special, and the tape shall be cotton or a polyester/cotton blend, approximating the shade of the basic material. The chain, slider and bottom stop shall be made of brass, except for semi-automatic pin lock cover and spring, which shall be stainless steel. As an alternate, a continuous monofilament nylon or polyester coil chain with 100% polyester or polyester/cotton blend tape and automatic lock may be used.

Hook and Eye. The hook and eye for the waistband shall be North and Judd (Hook Flex H-49E50); Universal Fastener (Elite #3, #7, and #8 hook with #8 eye or #85 eye); Akim Co. (Junior Series - type JB, Slim-Slak with MB eye and Slik-Slak); Stimpson (P-536, D-4086, D-4457, D-4228) or equal. The finish shall be nickel plate, and the base metal shall be steel.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:44Z
Check the source to verify that this is the current version before use.

Thread. The thread used for stitching and seaming shall be a cotton covered polyester core, shade Black AA, Cable No. 66043, conforming to type I of A-A-50199. Seaming and tacking shall use Ticket No. 50 or 70, 2 ply; overedging shall use Ticket No. 70, 2 ply; button sewing shall use Ticket No. 50, 2 ply. As an alternate, cotton machine thread conforming to type I of A-A-52094 may be used. Seaming shall use Ticket No. 40 or 50, 3 ply; overedging shall use Ticket No. 70, 3 ply; button sewing shall use Ticket No. 24, 4 ply. The color shall be Black AA, Cable No. 66043.

Gimp. The gimp for reinforcing the hip pocket buttonhole shall be 100% cotton, matching shade Black AA, Cable No. 66043, conforming to type I or II, Ticket No. 8 of A-A-50198.

Button. The button for the left hip pocket shall be melamine plastic, shade Black BT, Cable No. 62001, 22 line, flat, with 4 sewing holes.

Sizes and Lengths. The slacks shall be provided in the following sizes and lengths:

Sizes: 6, 8, 10, 12, 14, 16, 18, 20, and 22

Lengths: Short, Regular, Long, and Extra Long

NOTE: The lengths (Short, Regular, Long, and X-Long) may be abbreviated as S, R, L and XL.

Combination Label. Each pair of slacks shall have a white, non-woven, commercial type label which shall be affixed to the outside bottom of the right side pocketing, facing the slacks when worn. The inscription shall show fastness to laundering and shall contain the following information:

NAME:
SERVICE NO.:
FIBER CONTENT: 50% polyester/50% cotton
CONTRACT NO:
NAME OF CONTRACTOR/MANUFACTURER

LAUNDERING INSTRUCTION

Machine Wash - Warm Water
Tumble Dry - Gentle
Remove Promptly

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:44Z
Check the source to verify that this is the current version before use.

Size Label. Each pair of slacks shall have a white, non-woven, commercial type size label which shall be sewn to the lower edge of the waistband lining above the right hip pocket. The inscription shall show fastness to laundering and shall contain the following information:

Size 14R (Example)
Stock No.: 8410-00-000-0000 (Example)

Note: The lengths (Short, Regular, Long, and X-Long) may be abbreviated as S, R, L, or XL.

Patterns. The government shall furnish a single size pattern. The contractor is responsible for grading patterns for additional sizes. The pattern provides for a seam allowance of 1/2 inch for joining the seat seam, inseams and outseams, 7/8 inch outlet at top of seat seam, and 5/16 inch for all other seams. Commercial patterns may be used in lieu of the government furnished pattern provided they conform to the cited design and finished measurements.

Workmanship. After completion, the finished slacks shall be thoroughly clean, with all loose thread, lint, and foreign matter removed.

Product Demonstration Model. When required, offerers shall submit samples of their intended production. The Product Demonstration Model shall consist of units independently developed. Product Demonstration Models shall be analyzed and evaluated by the government. Evaluation criteria and basis for award are contained in the solicitation. Product Demonstration Models shall be retained by the government. One (1) Product Demonstration Model approved by DPSC under the resultant contract shall serve as a manufacturing standard for the corresponding production items delivered under this contract. Offerers are advised that the Product Demonstration Model does not relieve the successful offerer of his responsibility to perform in accordance with the Commercial Item Description specified above.

Regulatory Requirements. The offeror/contractor is encouraged to use recovered material in accordance with Public Law 94-580 to the maximum extent practicable.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:44Z
Check the source to verify that this is the current version before use.

Sizes and Measurements. The finished slacks shall conform to the measurements in Table III.

TABLE III - SIZES AND MEASUREMENTS

Size	Waist(A)	Hips (B)	Inseam - Unhemmed (C) S	R	L	XL	Knee (D)	Leg (E) Bottom
6	23-1/2	36	30	32	34	36	18-3/4	21-1/4
8	24-1/2	37	30	32	34	36	19	21-1/2
10	25-1/2	38	30	32	34	36	19-1/4	21-3/4
12	27	39-1/2	30	32	34	36	19-1/2	22
14	28-1/2	41	30	32	34	36	19-3/4	22-1/4
16	30	42-1/2	30	32	34	36	20	22-1/2
18	32	44-1/2	30	32	34	36	20-1/4	22-3/4
20	34	46-1/2	30	32	34	36	20-1/2	23
22	36	48-1/2	30	32	34	36	20-3/4	23-1/4
Tol.	±1/2	±1/2	±1/2	±1/2	±1/2	±1/2	±1/2	±1/2

NOTE: Waist and hip measurement of the slacks shall be taken with slide fastener fully closed and waistband fastened. All measurements shall be taken with slacks smooth and flat. A, B, C, D and E refer to figure 1.

(A) Waist - Twice the measurement taken in center of waistband from folded edge to folded edge.

(B) Hips - Twice the measurement taken from folded edge to folded edge, one inch above fly bartack.

(C) Inseam - Length measurement taken along inseam from crotch seam to unfinished bottom of legs.

(D) Knee - Twice the measurement taken from folded edge to folded edge across the width of slack leg at a point up from bottom of leg as follows:

Short	- 16 inches	Long	- 18 inches
Regular	- 17 inches	X-Long	- 19 inches

(E) Bottom - Twice the measurement taken from folded edge to folded edge across unfinished bottom of leg.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:44Z
Check the source to verify that this is the current version before use.

QUALITY ASSURANCE

Responsibility for Inspection. The contractor is responsible for assuring the slacks conform to the requirements of this document and the demonstration model. The contractor is also responsible for both in-process and final inspection for the entire contract quantity. The Government reserves the right to check any item(s) at any time during or after production for design, construction, workmanship, appearance, quality, and conformance to the demonstration model and finished measurements. Defective items shall be replaced by the contractor. Quality control shall be performed in the following areas:

a. Cutting room operations, i.e., top, middle, and bottom layers or parts shall be placed on the pattern for dimensional conformance. A 1/8 inch tolerance shall be allowed on front and back parts only, provided the finished part meets the specified requirements.
b. Assembly areas.
c. Pressing areas.
d. One hundred percent final inspection for conformance to the approved demonstration model and this document prior to packaging and shipping.

First Lot. A first lot consisting of not less than 100 items shall be submitted and inspected for compliance with the design, construction, workmanship, appearance, quality, and dimensional requirements stated herein and with the approved demonstration model.

Certification. The contractor shall certify and maintain substantiating evidence that the product offered meets the salient characteristics of this description and that the product conforms to the producer's own drawings, specifications, standards and quality assurance practices. The government reserves the right to require proof of such conformance prior to the first delivery and thereafter as may be otherwise provided for under the provisions of the contract. Reliance on contractor QA systems shall not relieve the contractor of the responsibility of ensuring that all products or supplies submitted to the government for acceptance comply with all requirements of the contract.

Examination. Slack lots shall be inspected in accordance with "Sampling Procedures and Tables for Inspection by Attributes", ANSI/ASQC Z1.4, published by the American Society for Quality Control.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:44Z
Check the source to verify that this is the current version before use.

Visual Examination. The slacks shall be examined for the defects listed below. The lot size shall be expressed in units of slacks. The sample unit is one slack. The inspection level shall be III and the acceptable quality level (AQL), expressed in terms of defects per hundred units, shall be 6.5.

Defects. The slacks shall be examined for the defects listed in Table IV.

TABLE IV - END ITEM VISUAL DEFECTS

Examination	Defect
Material and workmanship	Component part omitted, not cut as specified, distorted, full, tight, or twisted; any part of slack caught in any unrelated row of stitching Waistband: fullness, pleats, gathers or twists on waistband or top of slacks, lining exposed on outside; hook and eye not aligned or positioned properly Front opening: length of fly uneven at top Belt loop omitted, covering stitch on outside, insecure, not attached as specified, misplaced, finished length or width not as specified. Pocket: one pocket out of alignment from waistband or with companion pocket, notch exposed at pocket opening, facing or bearer not caught in bartack at end of opening Hole, cut, tear, smash, burn, drill hole, run, thin place, dye streak, color not as specified, misweave, knot or slub Permanent fold, pleat, or crease Twill line not consistent throughout Any finished measurement not as specified

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:44Z
Check the source to verify that this is the current version before use.

TABLE IV - END ITEM VISUAL DEFECTS - Cont'd.

Examination	Defect
	Seam: puckered, distorted, pleated, wavy, twisted, irregular or open, loose or tight stitch tension, broken or missing thread or stitch, needle chew, visible mend, edge or raised stitching sewn too close to edge, resulting in damage to cloth, seam allowance not as specified, raw edge, inseam staggered at crotch more than 3/8 inch
	Bartack missing, insecure, or misplaced, buttonhole stitching extending beyond bartack, misplaced, or not as specified
	Pressing omitted or not as specified
	Button or hook and eye misplaced, missing or broken, or positioned so as to cause a bulge or misaligned waistband
	Slide fastener does not mesh properly, slider binds, catches, sticks or disengages from coils, fastener not the type, style, or size specified
Shade Variations	Shade variation within a part or between parts
	Thread color not as specified
Cleanness	Spot, stain, thread ends not trimmed or removed
	Rancid odor
Label	Omitted, incorrect, illegible, misplaced, not attached as specified, or stitched through printing

Dimensional Examination. The finished slacks shall conform to the dimensions specified. Any dimension that is not within the established tolerance shall be classified as a defect. The sample unit shall be one slack; the inspection level shall be S-3 and the AQL, expressed in terms of defects per hundred units, shall be 2.5.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:44Z
Check the source to verify that this is the current version before use.

Packaging Examination. The fully packaged end items shall be examined for the defects listed below. The lot size shall be expressed in units of shipping containers. The sample unit shall be one shipping container fully packaged. The inspection level shall be S-2 and the acceptable quality level (AQL), expressed in terms of defects per hundred units, shall be 1.0.

EXAMINATION	DEFECT
Marking (exterior and interior)	Omitted; incorrect; illegible; of improper size, location, sequence or method of application.
Materials	Any component missing, damaged, or not as specified.
Workmanship	Inadequate application of components such as: incomplete closure of container flaps, loose strapping, improper taping, or inadequate stapling.
Content	Number of items per container is more or less than required.
	NSN shown on one or more items not as specified on shipping container.
Palletization	Length, width, or height exceeds specified maximum requirements.
	Pallet type not as specified.
	Load not bonded as specified.

End Item Performance Testing. The finished slacks shall conform to the requirements listed in Table I.

Preservation, Packing, and Marking. The preservation, packing, and marking shall be as specified in the contract or order.

Source of Government Documents. Copies of Military and Federal documents are available from:

Standardization Documents Order Desk
Bldg. 4D
700 Robbins Avenue
Philadelphia, PA 19111-5094

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:44Z
Check the source to verify that this is the current version before use.

Sources of Nongovernment Documents.

ANSI/ASQC Z1.4 - Sampling Procedures and Tables For Inspection By Attributes

(Applications for copies should be addressed to American National Standards Institute, 11 West 42nd Street, New York, NY 10036-8002.)

ASTM-D 1388-64 - Standard Test Methods for Stiffness of Fabrics

ASTM-D 1777-64 - Standard Method for Measuring Thickness of Textile Materials

ASTM-D 3775-85 - Standard Test Method for Fabric Count of Woven Fabric

ASTM-D 3776-85 Option C - Standard Test Methods for Mass per Unit Area (Weight) of Woven Fabric

ASTM-D 5034-90 - Standard Test Method for Breaking Force and Elongation of Textile Fabrics (Grab test)

(Applications for copies should be addressed to American Society For Testing and Materials, 1916 Race Street, Philadelphia, PA 19103-1187.)

AATCC Method 8-1989 - Colorfastness to Crocking: AATCC Crockmeter Method

AATCC Method 15-1989 - Colorfastness to Perspiration

AATCC Method 16-1990 Option A - Colorfastness to Light

AATCC Method 61-1989 Test 3A - Colorfastness to Laundering, Home and Commercial: Accelerated

AATCC Method 96-1988 - Dimensional Changes in Commercial Laundering of Woven and Knitted Fabrics Except Wool

(Applications for copies should be addressed to American Association of Textile Chemists and Colorists, P.O. Box 12215, Research Triangle Park, N.C. 27709-2215.)

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:44Z
Check the source to verify that this is the current version before use.

Custodian:
Coast Guard - CG

Civil Agency Coordinating Activity:
GSA - FSS

Preparing Activity:
DLA - CT

Project No.
8410-0819

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:44Z
Check the source to verify that this is the current version before use.

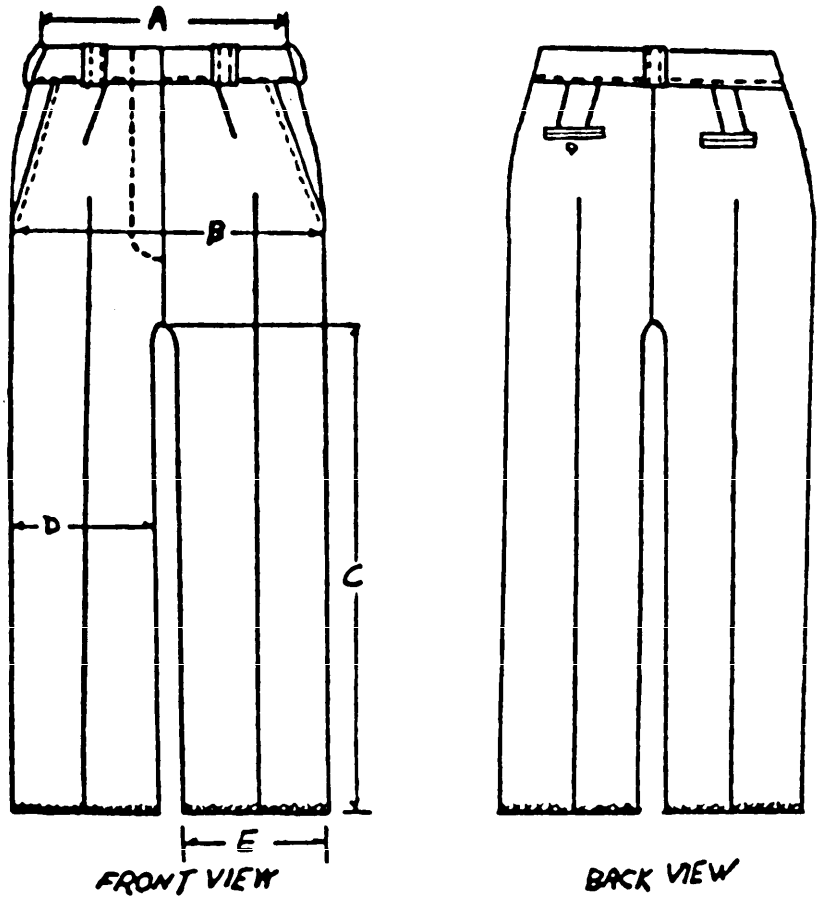


FIGURE 1 - SLACKS, WOMAN'S, UNDRESS

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:44Z
Check the source to verify that this is the current version before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

INSTRUCTIONS

1. The preparing activity must complete blocks 1, 2, 3, and 8. In block 1, both the document number and revision letter should be given.
2. The submitter of this form must complete blocks 4, 5, 6, and 7.
3. The preparing activity must provide a reply within 30 days from receipt of the form.

NOTE: This form may not be used to request copies of documents, nor to request waivers, or clarification of requirements on current contracts. Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document(s) or to amend contractual requirements.

I RECOMMEND A CHANGE:	1. DOCUMENT NUMBER	2. DOCUMENT DATE (YYMMDD)
	A-A-55210	93/05/27

3. DOCUMENT TITLE

Slacks, Women's, Undress

4. NATURE OF CHANGE *(Identify paragraph number and include proposed rewrite, if possible. Attach extra sheets as needed.)*

5. REASON FOR RECOMMENDATION

6. SUBMITTER

a. NAME (Last, First, Middle Initial)	b. ORGANIZATION	
c. ADDRESS (Include Zip Code)	d. TELEPHONE (Include Area Code) (1) Commercial (2) AUTOVON (If applicable)	7. DATE SUBMITTED (YYMMDD)

8. PREPARING ACTIVITY

a. NAME	b. TELEPHONE (Include Area Code)	
Defense Personnel Support Center ATTN: DPSC-FSSD (12-3-D)	(1) Commercial 215-737-8105	(2) AUTOVON 444-8105
c. ADDRESS (Include Zip Code) 2800 South 20Th Street P.O. Box 8419 Philadelphia, PA 19101-8419	IF YOU DO NOT RECEIVE A REPLY WITHIN 45 DAYS, CONTACT: Defense Quality and Standardization Office 5203 Leesburg Pike, Suite 1403, Falls Church, VA 22041-3466 Telephone (703) 756-2340 AUTOVON 289-2340	

DD Form 1426, OCT 89 *Previous editions are obsolete* 198 290

Source: https://assist.dla.mil -- Downloaded: 202610-26T09:44Z
Check the source to verify that this is the current version before use.