INCH POUND
A-A-60011A
1 September 2021
SUPERSEDING
A-A-60011
July 15, 2019

COMMERCIAL ITEM DESCRIPTION

ARMY COMBAT FITNESS TEST EQUIPMENT SET

The General Services Administration has authorized the use of this commercial item description by all federal agencies.

1. SCOPE. This commercial item description (CID) covers one (1) set of recreational and gymnastic equipment contained in the Army Combat Fitness Test (ACFT) equipment set. The ACFT is part of the Holistic Health and Fitness (H2F) System, a Chief of Staff of the Army initiative. The ACFT is a six event test comprised of 11 types of fitness equipment per set measuring muscular strength, muscular endurance, power, flexibility, coordination, speed, agility, cardiovascular endurance, balance and a reaction time for all Untied States Army units.

2. SALIENT CHARACTERISTICS

2.1 General Description. This basic specification, in combination with its associated specification sheets, describes the complete set. The components of the set may be procured individually by NSN (see Table I). A description of each individual component is listed herein.

2.2 Components. The complete ACFT equipment set and each component has been assigned a National Stock Number (NSN) and can be found in section 6 (Notes).

2.2.1 Hex bar. The hex bar shall have the following characteristics (see Figure 1):

a. Hexagon bar/trap-bar shall not have "d-handles".

b. Have a minimum load bearing of at least 500 lbs (226.7 kg).

c. The weight of the hex bar shall be 60 ± 2 pounds (27.22 ± 0.91 kg) (unloaded).

Beneficial comments, recommendations, additions, deletions, clarifications, and any other data that may improve this document should be sent to: U.S. Army DEVCOM, Ground Vehicle Systems Center, ATTN: Standardization, FCDD-GVS-IES, MS #267, 6501 E. 11 Mile Road, Warren, MI 48397-5000 or send email to usarmy.detroit.devcom-gvsc.mbx.standardization@mail.mil

FSC 6930

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T10:32Z
Check the source to verify that this is the current version before use.

d. The pipe sleeves shall:

   1. Be made from 1.5 inch SCH 80 pipe sleeves.

   2. Have not less than 16 inches (406.4 mm) of loadable sleeve length.

   3. Have a hollow sleeve design.

e. Parallel handles shall:

   1. Be knurled.

   2. Have parallel handles measure 1.34 inch in diameter and are spaced 25 inch on center.

f. Be rust proofed by any industry recognized standard powder coating (color shall be non-specific).

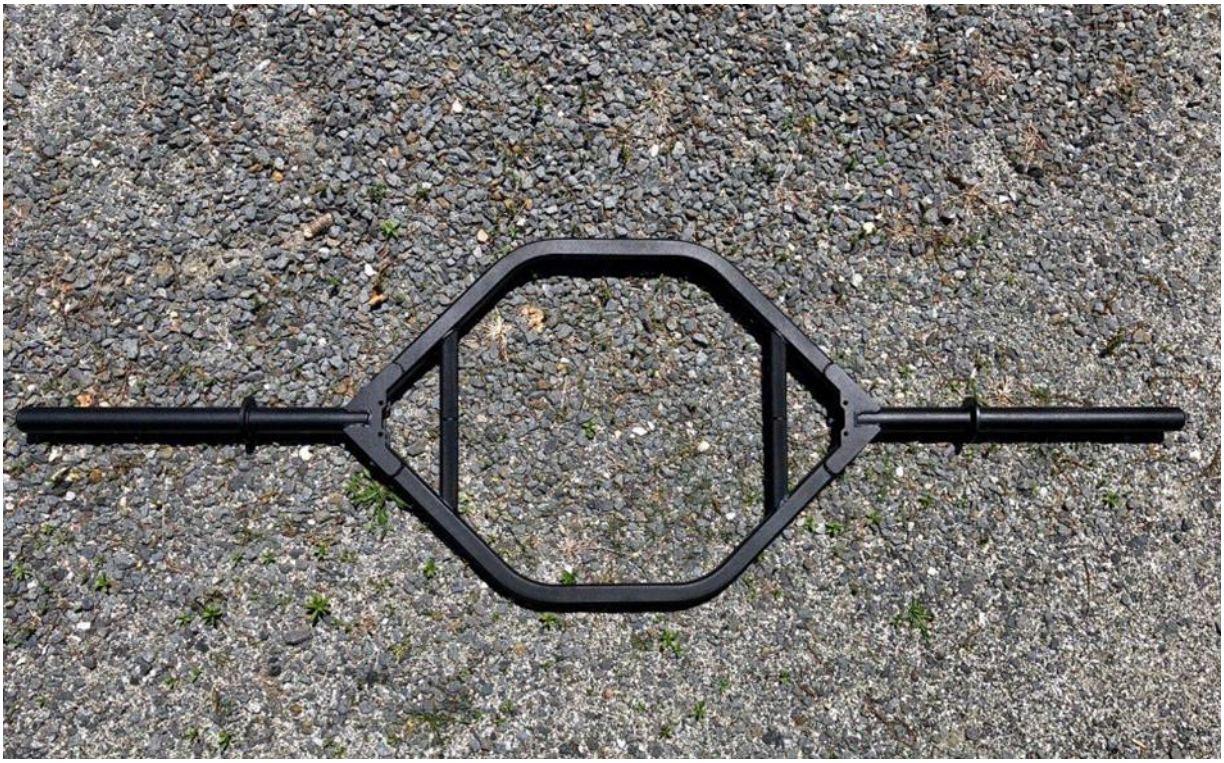


FIGURE 1. Hex bar

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T10:32Z
Check the source to verify that this is the current version before use.

2.2.2 Bumper plates. Dimensional differences are explained in subsequent paragraphs. All bumper plates (see Figure 2 and 3) shall be designed as follows:

a. Standard diameter shall be 445 mm – 450 mm ± 1 mm.

b. The rubber of the bumper plates shall be made from virgin or recycled rubber.

c. The hardness of the rubber shall be Shore durometer Shore A – 80 ± 5.0.; as per International Organization for Standardization (ISO-48-4:2018).

d. Bumper plate shall have a center insert (collar) made of stainless steel. Collar opening: 50.40 mm - 50.44 mm, IAW international weightlifting federation (IWF) specification (see 7.3);

e. Insert type: Integrated hub (stainless steel disc insert) or pressed stainless steel sleeve is acceptable;

f. Bumper plate color shall be non-specific.



FIGURE 2. Bumper plate.



FIGURE 3. Side view of bumper plates.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T10:32Z
Check the source to verify that this is the current version before use.

2.2.2.1 Ten (10) pound bumper plates. Ten (10) pound bumper plates shall be designed IAW 3.2.1 except:

a. Weight tolerance shall be ± 3.2 ounce.

b. Bumper plate widths. Bumper plate widths may be smaller to accommodate weight, but shall not exceed the width 34.9 + 1.650 mm (1.375 + 0.065) inch.

2.2.2.2 Fifteen (15) pound bumper plates. Fifteen (15) pound bumper plates shall be designed IAW 3.2.1 except:

a. The weight tolerance shall be ± 4.8 ounces.

b. Bumper plate widths may be smaller to accommodate weight, but shall not exceed the width 47.6 + 1.650 mm (1.875 inch + 0.065).

2.2.2.3 Twenty-Five (25) lb bumper plate. Twenty-Five (25) lb bumper plates shall be designed IAW 3.2.1 except:

a. The weight tolerance shall be ± 8 ounces.

b. Bumper plate widths may be smaller to accommodate weight, but shall not exceed the width 57.15 + 1.650 mm (2.250 + 0.065 inch).

2.2.2.4 Thirty-five (35) lb bumper plates. Thirty-five (35) lb bumper plates shall be designed IAW 3.2.1 except:

a. The weight tolerance shall be ± 11.2 ounces.

b. Bumper plate widths may be smaller to accommodate weight, but shall not exceed the width 79.375 + 1.650 mm (3.125 + 0.065 inch).

2.2.2.5 Forty-five (45) lb bumper plates. Forty-five (45) lb bumper plates shall be designed IAW 3.2.1 except:

a. The weight tolerance shall be ± 14.4 ounces.

b. Bumper plate widths may be smaller to accommodate weight, but shall not exceed the width 95.25 + 1.650 mm (3.750 + 0.065 inch).

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T10:32Z
Check the source to verify that this is the current version before use.

2.3 Barbell collar (pair). Barbell collar shall be designed as follows (see Figure 4):

a. Barbell collar shall be compatible with Hexagon/Trap Bar.

b. Durable plastic or metal 2 x 2 inch barbell collar.

c. Weight: 1 to 2 lb **per pair**.

d. Fit allowance range between 50 - 53.34 mm (1.85 to 2.10 inches) on each side;

e. Barbell collar color shall be non-specific.



FIGURE 4. Barbell collar **(pair)**.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T10:32Z
Check the source to verify that this is the current version before use.

2.4 Sled (With Pull Strap). Sled shall be designed as follows (see Figure 5):

a. Shall be made of thick heavy duty nylon, fiber glass, polyester, or a combination of different fibers.

b. Sled standard size shall be 584.2 - 635 mm (23 and 25 inches) in length and 508 – 533.4 mm (20 - 21 inches) in width; with reinforced padding/strips.

c. Shall handle a minimum of four 45 lb plates (180 lbs) affixed to the center of the sled by an adjustable heavy duty strap or fixture.

d. Shall include a 25.4 mm wide (minimum) by 2336.8 mm (minimum) [1 inch wide (minimum) by 92 inch (minimum)] long pull strap made of nylon or similar material with reinforced handles on both ends.

e. Strap shall be affixed to the sled by way of a 63.5 – 66.4 mm (2.5 – 2.6 inch) diameter corrosion resistant steel ring permanently attached to the sled.

f. Color shall be non-specific.



FIGURE 5. Sled (with pull strap and one bumper plate).

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T10:32Z
Check the source to verify that this is the current version before use.

2.5 Ten (10) lb rubber/polyvinyl chloride (PVC) medicine ball. The medicine ball shall be designed as follows (see Figure 6):

a. The medicine ball shall be made from solid rubber/PVC, 241.3 – 254 mm (9.5 - 10 inches) in diameter.

b. The rubber or PVC shell, shall be of an even thickness.

c. The medicine ball shall weigh 10 lbs ± 1.60 ounce.

d. The medicine ball shall be heavy duty and non-malleable.

e. The medicine ball shall have a textured grip surface.

f. The medicine ball shall be round to ensure the ball does not warp or spin when thrown or rolled.

g. The medicine ball shall not lose its shape even when slammed on the floor with excessive force.

h. The medicine ball shall be weather proof.

i. The medicine ball may contain an inflatable bladder.

j. The medicine ball color shall be non-specific;



FIGURE 6. Medicine ball.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T10:32Z
Check the source to verify that this is the current version before use.

2.6 Forty (40) lb kettlebell. The kettlebell shall be designed as follows (see Figure 7):

a. Shall be made of a natural, slip free texture with a seamless and even finish.

b. Weight shall be 40 lbs ± 6.4 ounces.

c. Materials shall be made of cast iron or steel.

d. Shall be powder coated (color shall be non-specific).

e. Height shall be: 228.6 – 304.8 mm (9 - 12 inches).

f. Diameter shall be: 177.8 – 228.6 mm (7 - 9 inches).

g. Shall be of a one-piece design.

h. Shall have a flat base.



FIGURE 7. Kettlebell.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T10:32Z
Check the source to verify that this is the current version before use.

2.7 Measuring tape (Metric). The measuring tape shall be designed as follows (see Figure 8):

a. Units of measure shall be in metric (on the reverse side, units of measure may be in inches).

b. Shall have long-lasting fiberglass blades with vinyl/PVC coating in ABS shatter resistant case.

c. Shall have open reel with easy to wind, flush-folding handle;

d. Shall measure 30 meters (m), open reel tape measure, and 12 – 13 mm (~1/2 inch) wide;

e. Measuring tape color shall be non-specific.



FIGURE 8. Metric tape measure.

3. REGULATORY REQUIREMENTS.

3.1 Recovered materials. The offeror/contractor is encouraged to use recovered, recycled, bio based, and environmentally preferable materials to the maximum extent practicable, in accordance with paragraph 23.403, 23.404(b) of the Federal Acquisition Regulation FAR, or the sustainable acquisition of EO 13693; as applicable.

4. PRODUCT CONFORMANCE PROVISIONS.

4.1 Product conformance provisions. The products provided shall meet the salient characteristics of this commercial item description, conform to the producer's own drawings,

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T10:32Z
Check the source to verify that this is the current version before use.

specifications, standards, and quality assurance practices, and be the same product offered for sale in the commercial marketplace. The government reserves the right to require proof of such conformance.

4.2 Responsibility for inspection. Unless otherwise specified in the contract or purchase order, the contractor is responsible for the performance of all inspection requirements as specified herein. Except as otherwise specified in the contract or purchase order, the contractor may use his own or any facilities suitable for the performance of the inspection requirements specified herein, unless disapproved by the Government. The Government reserves the right to perform any of the inspections set forth in the specification where such inspections are deemed necessary to assure supplies and services conform to prescribed requirements.

4.3 Records. Records of examinations and tests performed by or for the contractor shall be maintained by the contractor and made available to the Government upon the Government's request, at any time, or from time to time, during the performance of the contract and for a period of three years after delivery of the supplies to which such records relate.

4.4 Inspection. Inspection, as used herein, is defined as both examination (such as visual or auditory investigation without the use of special laboratory appliances or procedures) and testing (determination by technical means of physical and chemical properties) of the item.

4.5 Tests. Tests shall be conducted by the manufacturer to determine compliance with specification requirements. Where feasible, the same sample shall be used for the determination of two or more test characteristics.

4.6 Sampling. Sampling for examination shall be conducted in accordance with MIL-STD-1916 and table I. The unit of product for sampling purposes shall be one (1) AFCT equipment set as specified in this commercial item description.

4.7 Workmanship. At the time of acceptance, the ACFT equipment set shall be free from major defects. Minor defects exceeding the amount listed in Table I shall be cause for rejection.

TABLE I. Examination (defects).

Visual Examination	Allowable Defects (per 100)
Major defects	0
Total minor defects	4
Dimensional examination	2.5

4.8 Examination. The ACFT equipment set shall be examined by the contractor to determine compliance with all requirements contained in this specification.

4.9 Classification of defects. Examination shall be conducted in accordance with the classification of defects listed in Table II. Examination shall not be restricted to the classified possible defects below.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T10:32Z
Check the source to verify that this is the current version before use.

TABLE II. Classification of defects.

Classification	Defects
Major	
101	Any component part missing from the set
102	Hex bar bent or warped
103	Hex bar missing parts
104	Any one of the bumper plates weighing more or less than stated tolerances
105	Bumper plate insert missing or loose
106	Barbell collars non-operational/broken
107	Sled has missing/broken straps/fixture
108	Sled has missing/broken steel ring
109	More than 1% fraying of webbing/straps
110	Sled straps length/width out of tolerance
111	Medicine ball not being made of rubber/PVC
112	Medicine ball weighing more or less than stated tolerance
113	Medicine ball out of round/misshaped
114	Kettlebell weighing more or less than stated tolerance
115	Kettlebell not being made of cast iron or steel
116	Kettlebell dimensions are more or less than stated tolerance
117	Kettlebell has missing/broken handle
118	Measuring tape not in metric at least on one side
119	Measuring tape has missing/broken parts
120	Measuring tape does not have the capacity to measure 30 m
121	Any component part damaged
122	Bumper plate width within specification
123	Bumper plate rubber chipped or cut
124	Sled material not meeting specification
125	Medicine ball internal fill moves
126	Rust on any piece of equipment
127	Inadequate packaging
128	Hex Bar and Kettle Bell are powder coated
Minor	
201	Staining or otherwise discolored
202	Not clean
203	Webbing/straps improperly stitched
204	Missing material from component less than 0.5 $inch^2$
205	Damage from inadequate packaging
206	Used Equipment

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T10:32Z
Check the source to verify that this is the current version before use.

4.10 Each item in the set shall be weighed. Any deviation from specified weight plus tolerances on any item in the set shall constitute a major defect.

4.11 Contractor certification. The contractor shall certify the product offered meets the salient characteristics of this description and conforms to the producers' own drawings, specifications, standards, and quality assurance practices. The Government reserves the right to require proof of such conformance prior to first delivery and thereafter as may be otherwise provided for under the provisions of the contract.

5. PACKAGING. Preservation, packing, and marking shall be as specified in the contract or order.

6. NOTES.

6.1 NSN of ACFT equipment set. The ACFT equipment set NSN is 6930-01-692-1671.

6.2 Component NSNs. The ACFT equipment set shall consist of the components listed in Table III.

TABLE III. Identification of component parts from the ACFT equipment set.

Item	Nomenclature	Qty	WEIGHT	NSN	Paragraph
1	HEX BAR	1 EA	60 pounds (lbs)	6930-01-684-6427	3.1
2	BUMPER PLATE	4 EA	10 lbs	6930-01-684-6410	3.2.1.2
3	BUMPER PLATE	2 EA	15 lbs	6930-01-684-6409	3.2.1.3
4	BUMPER PLATE	2 EA	25 lbs	6930-01-684-6415	3.2.1.4
5	BUMPER PLATE	2 EA	35 lbs	6930-01-684-6419	3.2.1.5
6	BUMPER PLATE	8 EA	45 lbs	6930-01-684-6420	3.2.1.6
7	BARBELL COLLAR	1 PR	2 lbs	6930-01-684-6430	3.3
8	NYLON SLED W/PULL STRAP	1 EA	4 lbs	6930-01-684-6433	3.4
9	MEDICINE BALL	1 EA	10 lbs	6930-01-684-6435	3.5
10	KETTLE BELLS	2 EA	40 lbs	6930-01-684-6438	3.6
11	METRIC TAPE MEASURE	1 EA	2 lbs	6930-01-684-6431	3.7

6.3 Source documents. International Weightlifting Federation (IWF) Guidelines Sport Equipment Licensing may be obtained from https://www.iwf.net/wp-content/uploads/downloads/2015/11/IWF- Guidelines_Sport-Equipment-Licensing.pdf.
ISO-48-4:2018 Rubber, vulcanized or thermoplastic — Determination of Document to hardness can be obtained from https://www.iso.org/.
MIL-STD-1916, DoD Preferred Methods for Acceptance of Product is available from https://quicksearch.dla.mil/.

6.4 Key words:

Bumper plate
Hex bar
Barbell collar
Sled

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T10:32Z
Check the source to verify that this is the current version before use.

Medicine ball
Kettle bells
Metric tape

Custodian

Army – AT

Review Activity:

DLA – CQ

Preparing Activity:

Army – AT

Project No. 6930-2021-001

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T10:32Z
Check the source to verify that this is the current version before use.