V-L-61F
November 24, 1970
SUPERSEDING
Fed. Spec. V-L-61E
April 25, 1967

FEDERAL SPECIFICATION

LACES, NYLON

This specification was approved by the Commissioner, Federal Supply Service, General Services Administration, for the use of all Federal agencies.

1. SCOPE AND CLASSIFICATION

1.1 Scope. This specification covers two types of nylon laces.

1.2 Classification.

1.2.1 Types and classes. Laces shall be of two types in the following classes, as specified (see 6.2).

Type I - Spun nylon laces.

Class 1 - 7/32 inch width, flat.
Class 2 - 10/32 inch width, flat.

Type II - Bulked filament nylon laces.

Class 1 - 3/32 inch diameter, round.
Class 2 - 8/32 inch width, flat.
Class 3 - 4/32 inch diameter, round.

2. APPLICABLE DOCUMENTS

2.1 The following documents, of the issues in effect on date of invitation for bids or request for proposal, form a part of this specification to the extent specified herein.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:21Z
Check the source to verify that this is the current version before use.

Federal Specifications:

UU-P-268	-	Paper, Kraft, Untreated, Wrapping.
PPP-B-636	-	Box, Fiberboard.
PPP-T-45	-	Tape, Gummed, Paper, Reinforced and Plain, for Sealing and Securing.

Federal Standards:

Fed. Std. No. 123 - Marking for Domestic Shipment (Civil Agencies).
Fed. Std. No. 191 - Textile Test Methods.

(Activities outside the Federal Government may obtain copies of Federal Specifications, Standards, and Handbooks as outlined under General Information in the Index of Federal Specifications and Standards and at the prices indicated in the Index. The Index, which includes cumulative monthly supplements as issued, is for sale on a subscription basis by the Superintendent of Documents, U.S. Government Printing Office, Washington, DC 20402.

(Single copies of this specification and other Federal specifications required by activities outside the Federal Government for bidding purposes are available without charge from Business Service Centers, at the General Services Administration Regional Offices in Boston, New York, Washington, D.C., Atlanta, Chicago, Kansas City, Mo., Ft. Worth, Denver, San Francisco, Los Angeles, and Seattle, Washington.

(Federal Government activities may obtain copies of Federal Specifications, Standards, and Handbooks and the Index of Federal Specifications and Standards from established distribution points in their agencies.)

Military Standards:

MIL-STD-105	-	Sampling Procedures and Tables for Inspection by Attributes.
MIL-STD-129	-	Marking for Shipment and Storage.

(Copies of Military Specifications and Standards required by contractors in connection with specific procurement functions should be obtained from the procuring activity or as directed by the contracting officer.)

2.2 Other publications. The following documents form a part of this specification to the extent specified herein. Unless a specific issue is identified, the issue in effect on date of invitation for bids or request for proposal shall apply.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:21Z
Check the source to verify that this is the current version before use.

National Motor Freight Traffic Association, Incorporated, Agent:

National Motor Freight Classification

(Application for copies should be addressed to the National Motor Freight Traffic Association, Inc., Agent, 1616 P Street, N. W., Washington, DC 20036.)

Uniform Classification Committee, Agent:

Uniform Freight Classification

(Application for copies should be addressed to the Uniform Classification Committee, Tariff Publishing Officer, Room 202 Union Station, 516 W. Jackson Blvd., Chicago, IL 60606.)

3. REQUIREMENTS

3.1 Guide sample. Samples, when furnished, are solely for guidance and information to the supplier (see 6.3). Variations from this specification may appear in the sample, in which case this specification shall govern.

3.2 First article. This specification contains provisions for first article inspection and approval (see 4.2, 6.2 and 6.6).

3.3 Material.

3.3.1 Nylon. The use of regenerated or reprocessed nylon is prohibited. The supplier shall certify that the laces have been manufactured from virgin nylon.

3.3.2 Yarn. The nylon yarn for braiding type I, classes 1 and 2 laces shall be spun from nylon staple and twisted into a 2-ply yarn. The nylon yarn for braiding type II, classes 1 and 2 laces, shall be a 210 denier continuous multifilament yarn which has been increased in size to 230-250 denier by air bulking. The cover yarns and warp yarns for braiding type II, class 3 laces shall be made from 840 denier high tenacity continuous multifilament nylon yarn which has been increased to 940-1000 denier by the air bulking process; and the stuffer shall be one end of 10,080 denier, high tenacity continuous multifilament nylon yarn, which is not air bulked. The stuffer shall not be braided.

3.3.3 Tips. The tips shall be made from nylon sheet or film having a thickness of .013 to .016 inch. The color of the tips shall be black for black laces and clear for all other colored laces. As an alternate method, the ends of type II, class 1 and 3 laces shall be self-tipped by heat molding.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:21Z
Check the source to verify that this is the current version before use.

3.4 Color. The color of the finished laces shall be as specified (see 6.2) except the stuffer yarn for type II, class 3 lace need not be dyed.

3.4.1 Color matching. The color shall match the standard sample (when available) under natural (north sky) daylight, or artificial daylight having a color temperature of 7500° Kelvin and shall be a good approximation to the standard sample under incandescent lamplight at 2800° Kelvin.

3.4.2 Colorfastness. The dyed laces shall show colorfastness to water equal to, or better than, the standard sample when tested as specified in 4.3.2.2. When no standard sample is available, the dyed laces shall show "good" colorfastness to water when tested as specified in 4.3.2.2.

3.5 Braid. The braid for the laces shall be tubular braided without a core except for type II, class 3 which shall have a stuffer core. All laces shall use a two over and two under braiding except type II, class 2 which shall braid one pair over and one pair under. The braid shall be pressed flat for type I, classes 1 and 2, and for type II, class 2 laces, in accordance with commercial practice. The braid for the laces shall conform to the physical requirements in table I when tested as specified in 4.3.2.2.

TABLE I. Physical requirements

Type	Class	Diam. & Width (Tol.± 1/32) inch	Carriers minimum	Ends per carrier minimum	Warp ends minimum	Stuffer minimum	Picks per inch minimum	Breaking strength (lbs) minimum
I	1	7/32 (width)	44	1	-	-	38	95
I	2	10/32 (width)	44	2	-	-	26	175
II	1	3/32 (diam.)	16	3	-	-	28	100
II	2	8/32 (width)	44 1/	2	-	-	17	190
II	3	4/32 (diam.)	8	2	4	1	16	180

1/ Carriers braiding in pairs.

3.6 Tipping. Both ends of the lace shall be provided with a firmly attached and secured tip made from the material specified in 3.3.3. The alternate method of tipping shall be as indicated in 3.3.3. Tips shall be 3/4 ± 1/16 inch long.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:21Z
Check the source to verify that this is the current version before use.

3.6.1 Gripping strength. The nylon tips made from nylon sheet or film shall have a minimum gripping strength of 25 pounds for classes 1 and 3 laces and 40 pounds for class 2 laces when subjected to the test specified in 4.3.2.2.

3.6.2 Compression strength. The tips made from nylon sheeting or film shall not crack, dislodge from their position, or peel from the lace when tested as specified in 4.3.2.2.

3.7 Length. Laces shall be furnished in lengths, including tips, as specified (see 6.2). The laces shall be cut so as to insure the specified length when tested as specified in 4.3.2.2. Laces under 40 inches shall have a length tolerance of plus 5 percent, and laces 40 inches and longer shall have a length tolerance of plus 3 percent.

3.8 Workmanship. The finished laces shall conform to the quality and grade of product established by this specification. Occurrence of defects shall not exceed the applicable acceptable quality levels.

4. QUALITY ASSURANCE PROVISIONS

4.1 Responsibility for inspection. Unless otherwise specified in the contract or purchase order, the supplier is responsible for the performance of all inspection requirements as specified herein. Except as otherwise specified in the contract or order, the supplier may use his own or any other facilities suitable for the performance of the inspection requirements specified herein, unless disapproved by the Government. The Government reserves the right to perform any of the inspections set forth in the specification where such inspections are deemed necessary to assure that supplies and services conform to prescribed requirements.

4.1.1 Certificate of compliance. Where certificates of compliance are submitted, the Government reserves the right to check test such items to determine the validity of the certification.

4.2 First article inspection. When required, the preproduction sample submitted in accordance with 3.2 shall be inspected as specified in 4.3.2.1, 4.3.2.1.1, and 4.3.2.1.2 for compliance with material construction, workmanship and dimensional requirements. The sample shall be tested for physical and chemical characteristics in accordance with 4.3.2.2.

4.3 Inspection. Sampling for inspection and acceptance shall be in accordance with the provisions set forth in MIL-STD-105, except where otherwise indicated hereinafter.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:21Z
Check the source to verify that this is the current version before use.

4.3.1 Component and material inspection. In accordance with 4.1 above, components and materials shall be tested in accordance with all requirements of referenced specifications, drawings, and standards unless otherwise excluded, amended, modified, or qualified in this specification or applicable purchase documents. In addition, testing shall be performed on components listed in table II for the characteristics shown. The inspection level for each component shall be level S-1 and the acceptable quality level (AQL) for each component shall be 6.5 test failures per hundred units. All requirements are applicable to the sample unit. When the data in the "Number of determinations per sample unit" and "Results reported as" colums are not specified in table II, they shall be as required by the referenced test method.

TABLE II. Component tests

Component and lot expressed in terms of	Characteristic	Requirement para.	Test method	Number of determinations per sample unit	Results reported as	Sample unit
Nylon sheet (10 sheets)	Thickness	3.3.3	Gauge	3	Average of 3 determinations to the nearest 0.001 inch	6 by 1-1/2 inches or equivalent
	Material identification	3.3.3	3/	-	-	-
Nylon yarn, type II, before and after air bulking (1 cone, tube or spool of each)	Filament	3.3.2	Visual	1	Pass or fail	1 cone, spool or tube of each
	Denier 1/ 2/	3.3.2	4021 of Fed. Std. No. 191	-	-	-

1/ The supplier shall certify that a 210 denier filament yarn was used prior to air bulking for type II, classes 1 and 2 laces.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:21Z
Check the source to verify that this is the current version before use.

2/ The supplier shall certify that an 840 denier filament yarn was used prior to air bulking for type II, class 3.

3/ Unless otherwise specified, a certificate of compliance shall be submitted and will be acceptable for the stated requirement.

4.3.2 Inspection of the end item.

4.3.2.1 Examination of the end item. The laces shall be examined for defects in workmanship and material, and for overall length of tips. Defects found during these examinations shall be classified in accordance with 4.3.2.1.1 and 4.3.2.1.2. The sample unit for these examinations shall be one completely finished lace. The lot size shall be expressed in units of one lace each.

4.3.2.1.1 Visual examination. The inspection level for this examination shall be level I and the AQL shall be 1.0 defect per hundred units.

Examine	Defect
Laces	Any broken yarn. Frayed. Rub or abrasion marks. Hole, cut or tear. Unevenly braided resulting in open place or break in continuity of braid. Pulled yarn or uneven tension resulting in uneven width. Other than tubular braided with a core, when applicable. Other than tubular braided without a core, when applicable. Flat lace, when applicable, not flat for a distance of 2 inches or more. Round lace, when applicable, not round for a distance of 2 inches or more. Slub, knot, or abruptly thickened place which may affect utility. Color other than specified. Offshade. Spot, stain, or other discoloration affecting appearance. Objectionable odor.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:21Z
Check the source to verify that this is the current version before use.

Examine	Defect
Tipping	Any tip missing, damaged, malformed, or insecurely attached. Inadequate heat molding, e.g., burned, brittle, incomplete, sharp edges (for type II, classes 1 and 3 only). Tipping of braid not neatly accomplished. Self-tipped by heat molding on other than type II, classes 1 and 3. Not fabricated of nylon sheet, when applicable. Color - clear or any color other than black for black laces. Color - any color other than clear for laces other than black. End of tip projects beyond the braid more than 1/16 inch (for attached tips only). End of braid projects beyond the tip end more than 1/16 inch (for attached tips only).

4.3.2.1.2 Examination for overall length of tip ends. Any overall length of tip exceeding specified tolerances specified in 3.6 shall be classified as a defect. The inspection level for this examination shall be S-3 and the AQL shall be 1.0 defect per hundred units.

4.3.2.2 Testing of the end item. Testing of the completely fabricated laces shall be performed in accordance with table III and Fed. Std. No. 191 for characteristics shown therein. The inspection level shall be S-1 and the AQL shall be 6.5 test failures per hundred units. The sample unit for tests shall be twenty completely fabricated laces. Requirements are applicable to the sample unit. When the data in the "Number of determinations per sample unit" and "Results reported as" columns are not specified in table III, they shall be as required by the referenced test method. The lot size shall be expressed in units of one lace each.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:21Z
Check the source to verify that this is the current version before use.

TABLE III. End item tests

Characteristic	Requirement paragraph	Test method	Number of determinations per sample unit	Results reported as
Nylon identification 1/	3.3.1	1530	-	-
Virgin state of nylon 1/	3.3.1	-	-	-
Yarn ply (type I)	3.3.2	Visual	1	Number of plies
Staple (type I)	3.3.2	Visual	1	Pass or fail
Bulked multifilament (type II)	3.3.2	Visual	1	Pass or fail
Colorfastness to water	3.4.2	5630	-	-
Braiding type	3.5	Visual	1	Pass or fail
Width or diameter	Table I	4.4.1	3	Average to nearest 1/32 inch
Carriers	Table I	Visual	1	Number of carriers
Ends per carrier	Table I	Visual	1	Number of ends
Warp ends (type II, class 3)	Table I	Visual	1	Number of warp ends
Stuffer (type II, class 3)	Table I	Visual	1	Pass or fail
Picks per inch	Table I	Visual	1	Number of picks
Breaking strength	Table I	4102 and 4.4.3	-	-
Gripping strength (tips)	3.6.1	4.4.5	10	Average to nearest 1.0 lb.
Compression strength (tips)	3.6.2	4.4.4	1	Pass or fail
Length, overall	3.7	4.4.2	1	To the nearest 1/16 inch

1/ Unless otherwise specified, a certificate of compliance shall be submitted and will be acceptable for the stated requirements.

Source: https://assist.dla.mil - Downloaded: 2026-10-26T11:21Z
Check the source to verify that this is the current version before use.

4.3.3 Examination of preparation for delivery requirements. An examination shall be made to determine whether packaging, packing, and marking comply with section 5 of this specification. Defects shall be scored in accordance with the list below. The sample unit shall be one shipping container, fully prepared for delivery with the exception that it need not be sealed. Defects of closure listed below shall be examined on shipping containers fully prepared for delivery. The lot size shall be the number of shipping containers in the end item inspection lot. The inspection level shall be S-2 and the AQL shall be 2.5 defects per hundred units.

Examine	Defect
Marking (exterior and interior)	Omitted; incorrect; illegible; of improper size, location, sequence, or method of application.
Materials	Any component missing or damaged.
Workmanship	Inadequate application of components such as incomplete closure of container flaps, loose strapping, improper taping, inadequate stapling. Bulged or distorted container.
Content	Number of bundles per container is more or less than required. Number of laces per bundle is more or less than required. 1/

1/ One bundle from each shipping container in the sample shall be examined.

4.4 Tests.

4.4.1 Width or diameter. The width or diameter shall be determined at 3 points at least 9 inches apart by steel rule graduated in thirty-seconds of an inch, or by a caliper-type gauge and the results averaged. The measurements shall be taken with the test lace suspended vertically under a tension of 3 ounces for class 1, and 6 ounces for classes 2 and 3 laces.

4.4.2 Length. The finished lace shall not be stretched or tensioned prior to the length test. The finished lace shall be suspended vertically under a tension of 3 ounces for classes 1 and 3, and 6 ounces for class 2, and then measured from end to end including tips.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:21Z
Check the source to verify that this is the current version before use.

4.4.3 Breaking strength. The breaking strength of the laces shall be determined as specified in method 4102 of Fed. Std. No. 191 except that the clamps shall be not less than 2 inches in diameter and the distance between the center of the clamps at the start of the test shall be 6 inches ± 1/16 inch. When the lace length is less than 24 inches, a flat-type jaw shall be used in lieu of a drum-type jaw.

4.4.4 Compression strength. The tip shall be placed between flat blocks of steel and subjected to a gradually applied crushing load of 1000 pounds.

4.4.5 Gripping strength of tips.

4.4.5.1 Test specimen. The specimen shall be a one-half length of a shoe lace. (Two determinations may be made from one complete shoe lace.)

4.4.5.2 Apparatus.

4.4.5.2.1 Testing machine. The testing machine shall be as described in method 5100 of Fed. Std. No. 191 except a slotted metal plate as shown in figure shall be used in connection with the top jaw assembly and the distance between the upper jaw (slotted metal plate) and the lower jaw or clamp shall be 4 inches ± 1/16 inch. The lower jaw shall be as described in method 5100 or 4102 of Fed. Std. No. 191.

4.4.5.2.2 Metal plate (figure 1). The rigid metal plate shall be of the approximate dimensions 5 inches long by 1-1/2 inches wide and shall contain a 4 inch tapered slot centered widthwise and running lengthwise from an inside dimension of 1/32 inch in width, increasing to a width of 1/4 inch at the outside edge. The slot shall be smoothly finished. It is not required that the plate be of a single piece of metal. The slot may be formed by a clamped or bolted assembly of two metal bars or plates properly spaced apart. The plate shall be supported in a horizontal position in, or on, top jaw of the appartus.

4.4.5.3 Procedure. The lace shall be passed upward, tip first, through the jaw assembly and through the wide end of the slot until the tip clears the plate, and then moved horizontally toward the narrow end of the slot until the end of the tip rests on top of the metal plate. The free end of the specimen (lace) shall be fastened in the lower jaw or clamp. The machine shall be started, with the pawl in contact with the ratchet, and the maximum resistance in displacing the tip shall be recorded. The force shall be applied to the specimen at such a rate that the pulling clamp will travel at a uniform speed of 12 inches ± 0.5 inch per minute. After the tip has been forced from the lace, the resultant force shall be read from the dial, scale, or chart and

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:21Z
Check the source to verify that this is the current version before use.

the value recorded to the nearest pound. If the lace tip slips through the slot without its being removed from the lace or if, for any reason attributed to faulty technique, an individual measurement falls markedly below the average test for the sample unit, such result shall be discarded and another specimen shall be tested. Buckling of the tip material at the base of the tip without the tip being removed from the lace shall not be considered as a failure of the tip.

4.4.5.4 Report. Ten specimens shall be tested from each sample unit. The gripping strength of the sample unit shall be the average of the results and shall be reported to the nearest 1.0 pound.

5. PREPARATION FOR DELIVERY

5.1 Packaging. Packaging shall be level A or C, as specified (see 6.2).

5.1.1 Level A. Five gross of laces of one type, class, length, and color only shall be put up in a compact bundle having approximate overall dimensions as specified in table IV. Prior to bundling, the laces shall be grouped full length in one-gross lots and securely tied together. Each bundle of laces shall be completely wrapped in 60 pound minimum basis weight kraft paper conforming to grade B of UU-P-268. The wrap shall be securely sealed with 2 inch minimum width gummed paper tape conforming to type III, grade B of PPP-T-45.

5.1.2 Level C. Laces shall be packaged to afford adequate protection against physical damage during shipment from the supply source to the first receiving activity. The supplier may use his standard practice when it meets this requirement.

5.2 Packing. Packing shall be level A, B, or C, as specified (see 6.2).

5.2.1 Level A. Laces of one type, class, length, and color only, packaged as specified in 5.1 shall be packed in a fiberboard shipping container conforming to style RSC-L, grade V2s of PPP-B-636. The inside of each shipping container shall be fitted with a taped box liner conforming to type CF, class weather-resistant, variety DW, grade V15c of PPP-B-636.

5.2.2 Level B. Laces of one type, class, length, and color only, packaged as specified in 5.1, shall be packed in a fiberboard shipping container conforming to style RSC-L, type CF (variety SW) or SF, class domestic, grade 275 of PPP-B-636. The inside of each shipping container shall be fitted with a taped box liner conforming to type CF, class domestic, variety DW, grade 275 of PPP-B-636. Level A bundles shall be packed in the quantities and arrangement as specified in table IV. Approximate inside dimensions of each shipping container shall be as specified in table IV. Each shipping container shall be closed in accordance with method II as specified in the appendix of PPP-B-636.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:21Z
Check the source to verify that this is the current version before use.

TABLE IV. Packing details

Class	Bundle 1/ Length, inches	Bundle 1/ Overall dimensions, inches	Arrangement in container Quantity	Arrangement in container Length	Arrangement in container Width	Arrangement in container Depth	Shipping container 1/ Inside dimensions (inches) Length	Width	Depth
1	21	10-1/2 by 7-1/2 by 3-1/2	16	2	2	4	21	15	14-1/4
1	25	12-1/2 by 7-1/2 by 3-1/2	16	2	2	4	27	15	14-1/4
1	27	13-1/2 by 7-1/2 by 3-1/2	16	2	2	4	27	15	14-1/4
1	28-1/2	14-1/2 by 7-1/2 by 3-1/2	16	2	2	4	30	15	14-1/4
1	30	15 by 7-1/2 by 3-1/2	16	2	2	4	30	15	14-1/4
1	40	10 by 15 by 3-1/2	16	2	2	4	30	20	14-1/4
1	50	25 by 7-1/2 by 3-1/2	8	1	2	4	27	15	14-1/4
1	52	26 by 7-1/2 by 3-1/2	8	1	2	4	27	15	14-1/4
1	54	27 by 7-1/2 by 3-1/2	8	1	2	4	27	15	14-1/4
1	84	21 by 15 by 3-1/2	8	2	1	4	30	21	14-1/4
2	30	15 by 7-1/2 by 7	8	2	2	2	30	15	14-1/4
2	40	10 by 15 by 7	8	2	2	2	30	20	14-1/4
2	44	11 by 15 by 7	8	2	2	2	30	22	14-1/4
2	52	26 by 7-1/2 by 7	4	1	2	2	27	15	14-1/4
2	60	30 by 7-1/2 by 7	4	1	2	2	30	15	14-1/4
2	64	16 by 15 by 7	4	2	1	2	30	16	14-1/4
3	60	30 by 7-1/2 by 7	4	1	2	2	30	15	14-1/4

1/ Bundle and container dimensions are approximations and are furnished as a guide only.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:21
Check the source to verify that this is the current version before use.

5.2.2.1 When specified (see 6.2), the shipping container shall be a grade V3c, V3s, or V4s fiberboard box fabricated in accordance with PPP-B-636 and closed in accordance with the appendix of the box specification.

5.2.3 Level C. Laces, packaged as specified in 5.1, shall be packed in a manner to insure carrier acceptance and safe delivery to destination at the lowest transportation rate for such supplies. Containers shall be in accordance with Uniform Freight Classification Rules or National Motor Freight Classification Rules, as applicable.

5.3 Marking.

5.3.1 Civil agencies. In addition to any special marking required by the contract or order, interior packages and shipping containers shall be marked in accordance with Fed. Std. No. 123.

5.3.2 Military requirements. In addition to any special marking required by the contract or order, interior packages and shipping containers shall be marked in accordance with MIL-STD-129.

6. NOTES

6.1 Intended use. The nylon laces are intended for use with various types of footwear, clothing and equipage.

6.2 Ordering data. Purchasers should select the preferred options permitted herein and include the following information in procurement documents:

(a) Title, number, and date of this specification.
(b) Type, class, and length required (see 1.2 and 3.7).
(c) First article (see 3.2, 4.2 and 6.6).
(d) Color required (see 3.4).
(e) Selection of applicable levels of packaging and packing (see 5.1 and 5.2).
(f) When weather-resistant grade fiberboard shipping containers are required for level B packing (see 5.2.2.1).

6.3 Sample. For access to samples, address the procuring office issuing the invitation for bids.

6.4 For civil agencies, level B packing should be used by ordering agencies only when shipment is known to be made to a holding supply depot or warehouse from which partial shipments will be made to ultimate consumers.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:21Z
Check the source to verify that this is the current version before use.

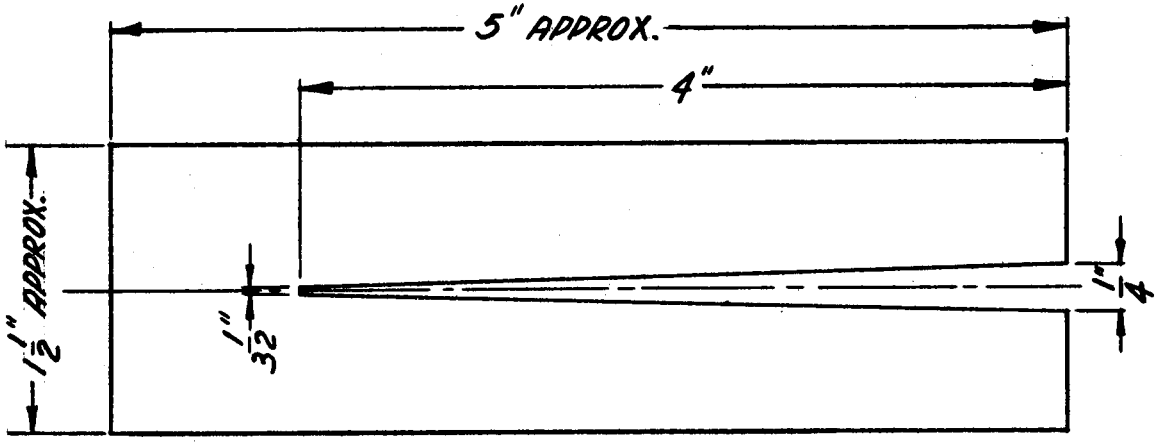


FIGURE 1 SLOTTED METAL PLATE

2-1-409

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:21Z
Check the source to verify that this is the current version before use.

6.5 The requirements in 5.1.1 shall apply when level B packaging is specified for civil agency procurements.

6.6 First article. The item covered by this specification requires first article inspection and approval under the appropriate provisions of paragraph 7-104.55 of the Armed Services Procurement Regulations. The first article should be a preproduction sample. The first article should consist of twenty finished laces. The contracting officer should include specific instructions in all procurement instruments, regarding arrangements for examination, test and approval of first article.

MILITARY CUSTODIANS:

Army - GL
Navy - SA
Air Force - 82

Review activities:

Army - MD
Air Force - 11

User activity:

Navy - MC

Preparing activity:

Army - GL

CIVIL AGENCY INTEREST:

AGR
COM
DC
GSA-FSS
HEW
INT
VA-DMS
JUS-FPI

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:21Z
Check the source to verify that this is the current version before use.

SPECIFICATION ANALYSIS SHEET

Form Approved
Budget Bureau No. 22-R255

INSTRUCTIONS: This sheet is to be filled out by personnel, either Government or contractor, involved in the use of the specification in procurement of products for ultimate use by the Department of Defense. This sheet is provided for obtsining information on the use of this specification which will insure that suitable products can be procured with a minimum amount of delay and at the least cost. Comments and the return of this form will be appreciated. Fold on lines on reverse side, staple in corner, and send to preparing activity. Comments and suggestions submitted on this form do not constitute or imply authorization to waive any portion of the referenced document(s) or serve to amend contractual requirements.

SPECIFICATION

Laces, Nylon V-L-61F

ORGANIZATION

CITY AND STATE

CONTRACT NUMBER

MATERIAL PROCURED UNDER A

☐ DIRECT GOVERNMENT CONTRACT ☐ SUBCONTRACT

1. HAS ANY PART OF THE SPECIFICATION CREATED PROBLEMS OR REQUIRED INTERPRETATION IN PROCUREMENT USE?

A. GIVE PARAGRAPH NUMBER AND WORDING.

B. RECOMMENDATIONS FOR CORRECTING THE DEFICIENCIES

2. COMMENTS ON ANY SPECIFICATION REQUIREMENT CONSIDERED TOO RIGID

3. IS THE SPECIFICATION RESTRICTIVE?

☐ YES ☐ NO *(If "yes", in what way?)*

4. REMARKS *(Attach any pertinent data which may be of use in improving this specification. If there are additional papers, attach to form and place both in an envelope addressed to preparing activity)*

SUBMITTED BY *(Printed or typed name and activity - Optional)*

DATE

DD FORM 1 JAN 66 1426

REPLACES EDITION OF 1 OCT 64 WHICH MAY BE USED.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:21Z
Check the source to verify that this is the current version before use.

FOLD

DEPARTMENT OF THE ARMY
U. S. Army Natick Laboratories
Natick, Massachusetts 01760

POSTAGE AND FEES PAID
DEPARTMENT OF THE ARMY

OFFICIAL BUSINESS

Commanding General
U. S. Army Natick Laboratories
ATTN: AMXRES-EQS
Natick, Massachusetts 01760

FOLD

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:21Z
Check the source to verify that this is the current version before use.