V-L-61H
June 15, 1984
SUPERSEDING
Fed. Spec. V-L-61G
January 11, 1979

FEDERAL SPECIFICATION

LACES, NYLON

This specification is approved by the Assistant Administrator, Office of Federal Supply and Services, General Services Administration, for the use of all Federal agencies.

1. SCOPE AND CLASSIFICATION

1.1 Scope. This specification covers nylon laces.

1.2 Classification.

1.2.1 Types and classes. Laces shall be of two types in the following classes as specified (see 6.2).

Type I - Spun nylon laces.
- Class 1 - 7/32 inch width, flat.
- Class 2 - 10/32 inch width, flat.
- Class 3 - 9/32 inch width, flat.

Type II - Bulked filament nylon laces.
- Class 1 - 3/32 inch diameter, round (210 denier yarn).
- Class 2 - 8/32 inch width, flat.
- Class 3 - 4/32 inch diameter, round.
- Class 4 - 3/32 inch diameter, round (420 denier yarn).

2. APPLICABLE DOCUMENTS

2.1 The following documents, of the issue in effect on date of invitation for bids or request for proposal, form a part of this specification to the extent specified herein.

Federal Specifications:

UU-P-268	-	Paper, Kraft, Wrapping
PPP-B-636	-	Boxes, Shipping, Fiberboard
PPP-T-45	-	Tape, Gummed, Paper, Reinforced and Plain, for Sealing and Securing

FSC 8335 and 8315

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:21Z
Check the source to verify that this is the current version before use.

Federal Standards:

FED-STD-123 - Marking for Shipment (Civil Agencies)
FED-STD-191 - Textile Test Methods

(Activities outside the Federal Government may obtain copies of Federal specifications, standards, and commercial item descriptions as outlined under General Information in the Index of Federal Specifications, Standards and Commercial Item Descriptions. The Index, which includes cumulative bimonthly supplements as issued, is for sale on a subscription basis by the Superintendent of Documents, US Government Printing Office, Washington, DC 20402.

(Single copies of this specification and other Federal specifications and commercial item descriptions required by activities outside the Federal Government for bidding purposes are available without charge from General Services Administation Business Service Centers in Boston, MA; New York, NY; Philadelphia, PA; Washington, DC; Atlanta, GA; Chicago, IL; Kansas City, MO; Ft. Worth, TX; Houston, TX; Denver, CO; San Francisco, CA; Los Angeles, CA; and Seattle, WA.

(Federal Government activities may obtain copies of Federal standardization documents and the Index of Federal Specifications, Standards and Commercial Item Descriptions from established distribution points in their agencies.)

Military Standards:

MIL-STD-105 - Sampling Procedures and Tables for Inspection by Attributes
MIL-STD-129 - Marking for Shipment and Storage
MIL-STD-147 - Palletized Unit Loads

(Copies of Military specifications and standards required by contractors in connection with specific procurement functions should be obtained from the procuring activity or as directed by the contracting officer.)

2.2 Other publications. The following document forms a part of this specification to the extent specified herein. Unless a specific issue is identified, the issue in effect on date of invitation for bids or request for proposal shall apply.

American Society for Testing and Materials (ASTM)

D 3951 - Standard Practice for Commercial Packaging

(Application for copies should be addressed to the American Society for Testing and Materials, 1916 Race Street, Philadelphia, PA 19103.)

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:21Z
Check the source to verify that this is the current version before use.

(Industry association specifications and standards are generally available for reference from libraries. They are also distributed among technical groups and using Federal agencies.)

3. REQUIREMENTS

3.1 Guide sample. Samples, when furnished, are solely for guidance and information to the contractor (see 6.3). Variations from this specification may appear in the sample, in which case this specification shall govern.

3.2 First article. When specified, a sample shall be subjected to first article inspection (see 4.3, 6.2 and 6.4).

3.3 Material (see 6.5).

3.3.1 Nylon yarn. The nylon yarn for braiding type I, classes 1, 2, and 3 laces shall be spun from nylon staple and twisted into a 2-ply yarn. The nylon yarn for braiding type II, classes 1 and 2 laces, shall be a 210 denier continuous multifilament yarn which has been increased in size to 230-250 denier by air bulking. The cover yarns and warp yarns for braiding type II, class 3 laces shall be made from 840 denier high tenacity continuous multifilament nylon yarn which has been increased to 940-1000 denier by the air bulking process; and the stuffer shall be one end of 10,080 denier high tenacity continuous multifilament nylon yarn, which is not air bulked. The stuffer shall not be braided. The type II, class 4 laces shall be made from 420 denier continuous filament nylon yarn which has been increased in size to 470-490 denier by air bulking.

3.3.2 Nylon acetate sheet or film. The material for attached lace tips shall be nylon or acetate sheet or film having a thickness of 0.013 to 0.016 inch. The color of the material shall be black for black laces and clear for all other laces.

3.4 Color. The color of the finished laces shall be as specified (see 6.2) except the stuffer yarn for type II, class 3 lace need not be dyed.

3.4.1 Color matching. The color shall match the standard sample for shade and appearance (when available) under artificial daylight having a color temperature of 7000 $\pm$ 500 K and shall be a good approximation to the standard sample under incandescent lamplight at 2850 $\pm$ 100 K.

3.4.2 Colorfastness. The dyed laces shall show colorfastness to water equal to or better than the standard sample. When no standard sample is available, the dyed laces shall show "good" colorfastness to water. Testing shall be as specified in 4.4.4.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:21Z
Check the source to verify that this is the current version before use.

3.5 Braid. The braid for the laces shall be tubular braided without a core except for type II, class 3 which has a stuffer core. All laces shall use a two over and two under braiding except type II, class 2 which shall braid one pair over and one pair under. The braid shall be pressed flat for type I, classes 1, 2, and 3, and for type II, class 2 laces in accordance with commercial practice. The braid for type II, classes 1, 3 and 4 laces shall be round and shall not be pressed. The braid for the laces shall conform to the physical requirements in table I when tested as specified in 4.4.4.

TABLE I. Physical requirements

Type	Class	Width Tol. ± 1/32 inch	Carriers minimum	Ends per carrier minimum	Warp ends minimum	Stuffer minimum	Picks per inch minimum	Breaking strength lbs minimum
I	1	7/32	44	1	-	-	38	95
I	2	10/32	44	2	-	-	26	175
I	3	9/32	44	2	-	-	21	185
II	1	3/32 (diam.)	16	3	-	-	28	100
II	2	8/32	44 1/	2	-	-	17	190
II	3	4/32 (diam.)	8	2	4	1	16	180
II	4	3/32 (diam.)	16	2	-	-	24	135

1/ Carriers braiding in pairs.

3.6 Tipping. Both ends of the laces shall be provided with a firmly attached tip made from the material specified in 3.3.2. As an alternate, the ends of the laces shall be self-tipped by heat molding. The lace tips shall be 3/4 ± 1/16 inch long. The lace tips shall have sufficient rigidity to perform their intended function.

3.6.1 Attached tip gripping strength. When attached tips are used, the tips shall have a minimum gripping strength of 25 pounds for classes 1, 3 and 4 laces and 40 pounds for class 2 laces when tested as specified in 4.4.4.

3.6.2 Attached tip compression strength. When attached tips are used the tips shall not crack, dislodge from their position, or peel from the lace when tested as specified in 4.4.4.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:21Z
Check the source to verify that this is the current version before use.

3.7 Length. Laces shall be furnished in lengths, including tips, as specified (see 6.2). The laces shall be cut so as to insure the specified length when tested as specified in 4.4.4. Laces under 40 inches shall have a length tolerance of plus 5 percent, and laces 40 inches and longer shall have a length tolerance of plus 3 percent.

3.8 Workmanship. The finished laces shall conform to the quality of product established by this specification. Occurrence of defects shall not exceed the applicable acceptable quality levels.

4. QUALITY ASSURANCE PROVISIONS

4.1 Responsibility for inspection. Unless otherwise specified in the contract or purchase order, the contractor is responsible for the performance of all inspection requirements as specified herein. Except as otherwise specified in the contract or purchase order, the contractor may use his own or any other facilities suitable for the performance of the inspection requirements specified herein, unless disapproved by the Government. The Government reserves the right to perform any of the inspections set forth in the specification where such inspections are deemed necessary to assure supplies and services conform to prescribed requirements.

4.1.1 Certificate of compliance. Where certificates of compliance are submitted, the Government reserves the right to check test such items to determine the validity of the certification.

4.2 Classification of inspection. The inspection requirements specified herein are classified as follows:

a. First article inspection (see 4.3).
b. Quality conformance inspection (see 4.4).

4.3 First article inspection. When a first article is required (see 6.2), it shall be examined for the defects specified in 4.4.2 and 4.4.3 and tested for the characteristics specified in table III. The presence of any defect or failure to pass any test shall be cause for rejection of the first article.

4.4 Quality conformance inspection. Unless otherwise specified, sampling for inspection shall be in accordance with MIL-STD-105.

4.4.1 Component and material inspection. In accordance with 4.1, components and materials shall be inspected in accordance with all the requirements of referenced specifications, drawings, and standards unless otherwise excluded, amended, modified, or qualified in this specification or applicable purchase document.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:21Z
Check the source to verify that this is the current version before use.

4.4.1.1 Certification. Components and materials listed below shall be accepted on the basis of a contractor's certificate of compliance with the indicated requirements.

Component or material	Requirement	Requirement paragraph
Yarn	Material identification, deniers and construction	3.3.1
Nylon or acetate sheet or film (when used)	Material identification and thickness	3.3.2

4.4.2 End item visual examination. The end item shall be examined for the defects listed below. The lot size shall be expressed in units of one lace. The sample unit shall be one lace. The inspection level shall be I, and the AQL, expressed in terms of defects per hundred units, shall be 4.0.

Examine	Defect
Laces	Any broken yarn. Frayed. Rub or abrasion marks. Hole, cut, or tear. Unevenly braided resulting in open place or break in continuity of braid. Pulled yarn or uneven tension resulting in uneven width. Other than tubular braided with a core, when applicable. Other than tubular braided without a core, when applicable. Flat lace, when applicable, not flat for a distance or 2 inches or more. Round lace, when applicable, not round for a distance of 2 inches or more. Slub, knot, or abruptly thickened place which may affect utility. Color other than specified. Offshade. Spot, stain, or other discoloration affecting appearance. Objectionable odor.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:21Z
Check the source to verify that this is the current version before use.

Examine	Defect
Tipping	Any tip missing, damaged, malformed, or insecurely attached. Inadequate heat molding (when applicable), e.g., burned, brittle, incomplete, sharp edges. Tipping of braid not neatly accomplished. Color of tips not black for black laces or not clear for other than black laces. End of tip projects beyond the braid more than 1/16 inch (for attached tips only). End of braid projects beyond the tip end more than 1/16 inch (for attached tips only). Thickness, width, or diameter of tip greater than thickness, width, or diameter of braid.

4.4.3 Tip length examination. The tips of the laces shall be examined for conformance to the length specified in 3.7. Any tip length not within the specified tolerance shall be classified as a defect. The lot size shall be expressed in units of one lace. The sample unit shall be one lace. The inspection level shall be S-3 and the AQL, expressed in terms of defects per hundred units, shall be 1.0.

4.4.4 End item testing. The end item shall be tested for the characteristics listed in table II. The methods of testing specified in FED-STD-191, wherever applicable and as listed in table II, shall be followed. The lot size shall be expressed in units of one lace. The sample unit shall be 20 laces, except when the laces have been self-tipped by heat molding, the sample unit shall be 15 laces. The inspection level shall be S-1 and the AQL, expressed in terms of defects per hundred units, shall be 6.5.

TABLE II. End item tests

Characteristic	Requirement paragraph	Test method	Number of determinations per sample unit	Results reported as
Colorfastness to water	3.4.2	5630	-	-
Braiding type	3.5	Visual	1	Pass or fail
Width or diameter	Table I	4.5.1	3	Average to nearest 1/2 inch

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:21Z
Check the source to verify that this is the current version before use.

TABLE II. End item tests (cont'd)

Characteristic	Requirement paragraph	Test method	Number of determinations per sample unit	Results reported as
Carriers	Table I	Visual	1	Number of carriers
Ends per carrier	Table I	Visual	1	Number of ends
Warp ends (type II, class 3)	Table I	Visual	1	Number of warp ends
Stuffer (type II, class 3)	Table I	Visual	1	Pass or fail
Picks per inch	Table I	Visual	1	Number of picks
Breaking strength	Table I	6016 and 4.5.3	-	-
Gripping strength (attached tips)	3.6.1	4.5.5	10	Average to nearest 1 lb.
Compression strength (attached tips)	3.6.2	4.5.4	1	Pass or fail
Length, overall	3.7	4.5.2	1	To the nearest 1/16 inch

4.4.5 Packaging inspection. An examination shall be made to determine that preservation, packing, and marking comply with the section 5 requirements. Defects shall be scored in accordance with the list below. The sample unit shall be one shipping container fully packaged except that it need not be closed. Examination for closure defects listed below shall be made on shipping containers fully packaged. The lot size shall be the number of shipping containers in the inspection lot. The inspection level shall be S-2 and the AQL, expressed in terms of defects per hundred units, shall be 2.5.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:21Z
Check the source to verify that this is the current version before use.

Examine	Defect
Marking (exterior and interior)	Omitted; incorrect; illegible; of improper size, location, sequence, or method of application.
Materials	Any component missing, damaged, or not as specified.
Workmanship	Inadequate application of components such as incomplete closure of container flap, loose strapping, improper taping, inadequate stapling. Bulged or distorted container.
Content	Number of laces per bundle is more or less than required. 1/ Number of bundles per container is more or less than required.

1/ One bundle from each shipping container in the sample shall be examined.

4.4.6 Palletization examination. An examination shall be made to determine that the palletization complies with the section 5 requirements. Defects shall be scored in accordance with the list below. The sample unit shall be one palletized unit load fully packaged. The lot size shall be the number of palletized unit loads in the inspection lot. The inspection level shall be S-1 and the AQL, expressed in terms of defects per hundred units, shall be 6.5.

Examine	Defect
Finished dimensions	Length, width, or height exceeds specified maximum requirements.
Palletization	Pallet pattern not as specified. Interlocking of loads not as specified. Load not bonded with required straps as specified.
Weight	Exceeds maximum load limits.
Marking	Omitted; incorrect; illegible; of improper size, location, sequence, or method of application.

4.5 Methods of inspection.

4.5.1 Width or diameter test. The width or diameter shall be determined at three points at least 9 inches apart by steel rule graduated in thirty-seconds

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:21Z
Check the source to verify that this is the current version before use.

of an inch, or by a caliper-type gauge and the results averaged. The measurements shall be taken with the test lace suspended vertically under a load of 3 ounces for classes 1 and 4, and 6 ounces for classes 2 and 3 laces.

4.5.2 Length test. The finished lace shall not be stretched or tensioned prior to the length test. The finished lace shall be suspended vertically under a load of 3 ounces for classes 1 and 4, and 6 ounces for classes 2 and 3, and then measured from end to end including tips.

4.5.3 Breaking strength test. The breaking strength of the laces shall be determined as specified in Method 6016 of FED-STD-191 except that the clamps shall be not less than 2 inches in diameter and the distance between the center of the clamps at the start of the test shall be 6 inches $\pm$ 1/16 inch. When the lace length is less than 24 inches, a flat-type jaw shall be used in lieu of a drum-type jaw.

4.5.4 Compression strength test. The tip shall be placed between flat blocks of steel and subjected to a gradually applied crushing load of 1000 pounds.

4.5.5 Gripping strength test.

4.5.5.1 Test specimen. The specimen shall be a one-half length of a shoe lace. (Two determinations may be made from one complete shoe lace.)

4.5.5.2 Apparatus.

4.5.5.2.1 Testing machine. The testing machine shall be as described in Method 5100 of FED-STD-191 except a slotted metal plate as shown in figure 1 shall be used in connection with the top jaw assembly and the distance between the upper jaw (slotted metal plate) and the lower jaw or clamp shall be 4 inches $\pm$ 1/16 inch. The lower jaw shall be as described in Method 5100 of FED-STD-191.

4.5.5.2.2 Metal plate (figure 1). The rigid metal plate shall be of approximate dimensions of 5 inches long by 1-1/2 inches wide and shall contain a 4 inch tapered slot centered widthwise and running lengthwise from an inside dimension of 1/32 inch in width, increasing to a width of 1/4 inch at the outside edge. The slot shall be smoothly finished. It is not required that the plate be of a single piece of metal. The slot may be formed by a clamped or bolted assembly of two metal bars or plates properly spaced apart. The plate shall be supported in a horizontal position in, or on, top jaw of the apparatus.

4.5.5.3 Procedure. The lace shall be passed upward, tip first, through the jaw assembly and through the wide end of the slot until the tip clears the plate, and then moved horizontally toward the narrow end of the slot until the end of the tip rests on top of the metal plate. The free end of the specimen

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:21Z
Check the source to verify that this is the current version before use.

(lace) shall be fastened in the lower jaw or clamp. The machine shall be started, with the pawl in contact with the ratchet, and the maximum resistance in displacing the tip shall be recorded. The force shall be applied to the specimen at such a rate that the pulling clamp will travel at a uniform speed of 12 inches ± 0.5 inch per minute. After the tip has been forced from the lace, the resultant force shall be read from the dial, scale, or chart and the value recorded to the nearest pound. If the lace tip slips through the slot without its being removed from the lace or if, for any reason attributed to faulty technique, an individual measurement falls markedly below the average test for the sample unit, such result shall be discarded and another specimen shall be tested. Buckling of the tip material at the base of the tip without the tip being removed from the lace shall not be considered as a failure of the tip.

5. PACKAGING

5.1 Preservation. Preservation shall be level A or Commercial, as specified (see 6.2).

5.1.1 Level A. Five gross of laces of one type, class, length, and color only shall be packed in a bundle having approximate overall dimensions as specified in table III. Prior to bundling, the laces shall be grouped full length in one-gross lots and securely tied together. Each bundle shall be completely wrapped in 60 pound minimum basis weight kraft paper conforming to type I, grade B of UU-P-268. The wrap shall be securely sealed with 2 inch minimum width gummed paper tape conforming to type III, grade B of PPP-T-45.

5.1.2 Commercial. Laces shall be preserved in accordance with ASTM D 3951.

5.2 Packing. Packing shall be level A, B, or Commercial, as specified (see 6.2).

5.2.1 Level A packing. Laces of one type, class, length, and color only, preserved as specified in 5.1 shall be packed in a fiberboard shipping container conforming to style RSC-L, grade V2s of PPP-B-636. The inside of each shipping container shall be fitted with a box liner conforming to type CF, class weather-resistant, variety DW, grade V15c of PPP-B-636. Level A bundles shall be packed in the quantities and arrangement as specified in table III. Approximate inside dimensions of each shipping container shall be as specified in table III. Each shipping container shall be closed in accordance with method III, waterproofed in accordance with method V, and reinforced as specified in the appendix of PPP-B-636, except that inspection shall be in accordance with 4.4.5.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:21Z
Check the source to verify that this is the current version before use.

5.2.2 Level B packing. Laces of one type, class, length, and color only, preserved as specified in 5.1, shall be packed in a fiberboard shipping container conforming to style RSC-L, type CF (variety SW) or type SF, class domestic, grade 275 of PPP-B-636. The inside of each shipping container shall be fitted with a box liner conforming to type CF, class domestic, variety DW, grade 275 of PPP-B-636. Level A bundles shall be packed in the quantities and arrangement as specified in table III. Approximate inside dimensions of each shipping container shall be as specified in table III. Each shipping container shall be closed in accordance with method II as specified in the appendix of PPP-B-636, except that inspection shall be in accordance with 4.4.5.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:21Z
Check the source to verify that this is the current version before use.

TABLE III. Packing details

Bundle 1/					Arrangement in container			Shipping container 1/ Inside dimensions (inches)		
Type	Class	Length, inches	Overall dimensions inches	Number of bundles per cont.	Length	Width	Depth	Length	Width	Depth
I	1	30	15 by 7-1/2 by 3-1/2	16	2	2	4	30	15	14-1/4
II	1	60	30 by 7-1/2 by 7	4	1	2	2	30	15	14-1/4
I	2	40	10 by 15 by 7	8	2	2	2	30	20	14-1/4
I	2	60	30 by 7-1/2 by 7	4	1	2	2	30	15	14-1/4
I	2	64	16 by 15 by 7	4	2	1	2	30	16	14-1/4
II	3	60	30 by 7-1/2 by 7	4	1	2	2	30	15	14-1/4
I	1	18	9 by 7-1/2 by 3-1/2	16	2	2	4	18	15	14-1/4
I	2	84	21 by 15 by 3-1/2	8	2	1	4	30	21	14-1/4
I	3	84	21 by 15 by 3-1/2	8	2	1	4	30	21	14-1/4

1/ Bundle and container dimensions are approximations and are furnished as a guide only.

V-L-01H

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:21Z
Check the source to verify that this is the current version before use.

5.2.2.1 Weather-resistant fiberboard containers. When specified (see 6.2), the shipping container shall be a grade V3c, V3s, or V4s fiberboard box fabricated in accordance with PPP-B-636 and closed in accordance with method III as specified in PPP-B-636, except inspection shall be in accordance with 4.4.5.

5.2.3 Commercial packing. Laces, preserved as specified in 5.1, shall be packed in accordance with ASTM D 3951.

5.3 Palletization. When specified (see 6.2), laces, packed as specified in 5.2, shall be palletized on a 4-way entry pallet in accordance with load type Ia of MIL-STD-147. Each prepared load shall be bonded with primary and secondary straps in accordance with bonding means K and L or film bonding means O or P. Pallet patterns shall be in accordance with the appendix of MIL-STD-147. Interlocking of loads shall be effected by reversing the pattern of each course. If the container is of a size which does not conform to any of the patterns specified in MIL-STD-147, the pallet pattern used shall first be approved by the contracting officer.

5.4 Marking. Marking shall be in accordance with 5.4.1 or 5.4.2 as specified (see 6.2).

5.4.1 Civil agencies. In addition to any special marking required by the contract or purchase order, wrapped bundles, shipping containers and palletized unit loads shall be marked in accordance with FED-STD-123 or ASTM D 3951, as applicable.

5.4.2 Military requirements. In addition to any special marking required by the contract or purchase order, wrapped bundles, shipping containers and palletized unit loads shall be marked in accordance with MIL-STD-129 or ASTM D 3951, as applicable.

6. NOTES

6.1 Intended use. The nylon laces are intended for use with various types of footwear, clothing and equipage.

6.2 Ordering data. Purchasers should select the preferred options permitted herein and include the following information in procurement documents:

a. Title, number, and date of this specification.
b. Type, class, and length required (see 1.2 and 3.7).
c. First article (see 3.2, 4.3 and 6.4).
d. Color required (see 3.4).
e. Selection of applicable levels of preservation and packing (see 5.1 and 5.2).
f. When weather-resistant grade fiberboard shipping containers are required for level B packing (see 5.2.2.1).
g. When palletization is required (see 5.3).
h. Marking required (see 5.4).

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:21Z
Check the source to verify that this is the current version before use.

6.3 Sample. For access to samples, address the procuring office issuing the invitation for bids.

6.4 First article. When a first article is required, it shall be inspected and approved under the appropriate provisions of FAR 52.209-4. The first article should be a preproduction sample consisting of twenty finished laces. The contracting officer should include specific instructions in all acquisition documents regarding arrangements for inspection and approval of the first article.

6.5 Recycled materials. It is encouraged that recycled material be used when practical as long as it meets the requirements of the specification (see 3.3).

MILITARY INTERESTS:

Custodians

Army - GL
Navy - NU
Air Force - 99

Review Activities

Army - MD
Air Force - 82
DLA - CT

User Activities

Navy - MC
Air Force - 45

CIVIL AGENCY COORDINATING ACTIVITY:

GSA - FSS

PREPARING ACTIVITY:

Army - GL

Project No. 8335-0152

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:21Z
Check the source to verify that this is the current version before use.

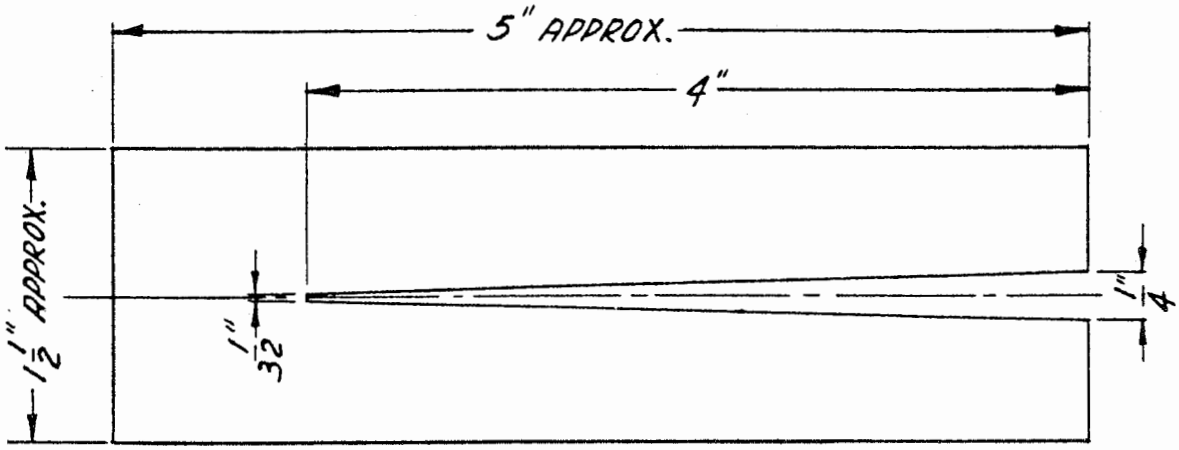


FIGURE 1 SLOTTED METAL PLATE

2-1-409

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:21Z
Check the source to verify that this is the current version before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

(See Instructions – Reverse Side)

1. DOCUMENT NUMBER	2. DOCUMENT TITLE
V-L-61H	Laces, Nylon

a. NAME OF SUBMITTING ORGANIZATION	4. TYPE OF ORGANIZATION *(Mark one)*
	☐ VENDOR ☐ USER ☐ MANUFACTURER ☐ OTHER *(Specify)*: _____
b. ADDRESS *(Street, City, State, ZIP Code)*	

5. PROBLEM AREAS

a. Paragraph Number and Wording:

b. Recommended Wording:

c. Reason/Rationale for Recommendation:

6. REMARKS

7a. NAME OF SUBMITTER *(Last, First, MI)* — Optional	b. WORK TELEPHONE NUMBER *(Include Area Code)* — Optional
c. MAILING ADDRESS *(Street, City, State, ZIP Code)* — Optional	8. DATE OF SUBMISSION *(YYMMDD)*

DD FORM 82 MAR 1426 PREVIOUS EDITION IS OBSOLETE.

NATICK OP, 1 Apr 84

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:21Z
Check the source to verify that this is the current version before use.

INSTRUCTIONS: In a continuing effo[illegible] make our standardization documents bett[illegible]he DoD provides this form for use in submitting comments and suggestions for improvements. All users of military standardization documents are invited to provide suggestions. This form may be detached, folded along the lines indicated, taped along the loose edge *(DO NOT STAPLE)*, and mailed. In block 5, be as specific as possible about particular problem areas such as wording which required interpretation, was too rigid, restrictive, loose, ambiguous, or was incompatible, and give proposed wording changes which would alleviate the problems. Enter in block 6 any remarks not related to a specific paragraph of the document. If block 7 is filled out, an acknowledgement will be mailed to you within 30 days to let you know that your comments were received and are being considered.

NOTE: This form may not be used to request copies of documents, nor to request waivers, deviations, or clarification of specification requirements on current contracts. Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document*(s)* or to amend contractual requirements.

(Fold along this line)

(Fold along this line)

DEPARTMENT OF THE ARMY
US Army Natick Research and Development Center
Natick, Massachusetts 01760

NO POSTAGE NECESSARY IF MAILED IN THE UNITED STATES

OFFICIAL BUSINESS
PENALTY FOR PRIVATE USE $300
STRNC-ES

BUSINESS REPLY MAIL
FIRST CLASS PERMIT NO. 12062 WASHINGTON D. C.
POSTAGE WILL BE PAID BY THE DEPARTMENT OF THE ARMY

Commander
US Army Natick Research and Development Center
ATTN: STRNC-ES
Natick, MA 01760

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:21Z
Check the source to verify that this is the current version before use.