V-L-70D
December 24, 1981
SUPERSEDING
V-L-0070C(IH)
15 April 1975
AND
V-L-70a
12 October 1964

FEDERAL SPECIFICATION

LAPEL BUTTON, CIVILIAN, LENGTH OF SERVICE

This specification was approved by the Commissioner, Federal Supply Service, General Services Administration, for the use of all Federal Agencies.

1. SCOPE AND CLASSIFICATION.

1.1 Scope. This specification covers one type of lapel button, charm, tie tac, and lapel pin used to designate Government civilian employee years of service.

1.2 Classification.

1.2.1 Style, grade, and class. Lapel buttons, charms, tie tacs, and lapel pins shall be of the following styles, grades, and classes specified (see 6.2).

Style 1 - Lapel button 1/
Style 2 - Charm 1/
Style 3 - Tie tac 1/
Style 4 - Lapel pin 1/
Grade A - Gold
  Class 1 - 50 years service (diamond)
  Class 2 - 45 years service (sapphire)
  Class 3 - 40 years service (ruby)
  Class 4 - 35 years service
  Class 5 - 30 years service
Grade B - Silver
  Class 1 - 25 years service
  Class 2 - 20 years service
Grade C - Bronze
  Class 1 - 15 years service
  Class 2 - 10 years service

1/ For purpose of editorial ease, the term "emblem" shall be used to indicate lapel button, charm, tie tac, and lapel pin throughout the remainder of this specification.

2. APPLICABLE DOCUMENTS.

2.1 The following documents of the issue in effect on the date of invitation for bids or request for approval, forms a part of the specification to the extent specified herein.

Federal Specifications:

PPP-B-636 Box, Shipping, Fiberboard
PPP-B-676 Boxes, Set-up

/FSC 8455/

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:21Z
Check the source to verify that this is the current version before use.

Federal Standards:

FED-STD-123 Marking for Shipment (Civil Agencies)
FED-STD-151 Metal; Test Methods

(Activities outside the Federal Government may obtain copies of Federal specifications, standards, and commercial items descriptions as outlined under General Information in the Index of Federal Specifications, Standards and Commercial Item Descriptions. The Index, which includes cumulative bi-monthly supplements as issued, is for sale on a subscription basis by the Superintendent of Documents US Government Printing Office, Washington, DC 20402.)

(Single copies of this specification, and other Federal specifications and commercial item descriptions required by activities outside the Federal Government for bidding purpose are available without charge from General Services Administration Business Service Centers in Boston; New York, Washington, DC; Philadelphia; Atlanta; Chicago; Kansas City, MO; Fort Worth; Houston; Denver; San Francisco; Los Angeles; and Seattle, WA.)

(Federal Government activities may obtain copies of Federal specifications, standards, and commercial item descriptions and the Index of Federal Specifications, Standards, Commercial Item Descriptions from established distribution points in their agencies.)

Military Standards:

MIL-STD-105 Sampling Procedures and Tables for Inspection by Attributes
MIL-STD-129 Marking for Shipment and Storage

(Copies of Military specifications and standards required by contractors in connection with specific procurement functions should be obtained from the procuring activity or as directed by the contracting officer.)

2.2 Other publications. The following document forms a part of this specification to the extent specified herein. Unless otherwise specified, the issue in effect on date of invitation for bids or request for proposal shall apply.

The Institute of Heraldry, US Army

Standard Color Chip Set

(The individual color chips may be obtained from The Institute of Heraldry, U.S. Army, 5010 Duke Street, Alexandria, VA 22314.)

National Motor Freight Traffic Association, Inc., Agent:

National Motor Freight Classification.

(Application for copies should be addressed to the Americian Trucking Associations, Inc., Traffic Department, 1616 P. Street, NW Washington, DC 20036.)

Uniform Classification Committee, Agent:

Uniform Freight Classification.

(Application for copies should be addressed to the Uniform Classification Committee, Room 1106, 222 South Riverside Plaza, Chicago, IL 60606.)

Source: https://assist.dla.mil Downloaded: 2026-10-26T11:21Z
Check the source to verify that this is the current version before use.

3. REQUIREMENTS.

3.1 Standard sample. Unless otherwise specified (see 6.2), the contracting officer will furnish a standard sample of the applicable emblem which shall be used for matching color and finish only.

3.2 First Article. Unless otherwise specified (see 6.2), before production is commenced, a sample of the finish emblem covered by this specification shall be submitted or made available to the Contracting Officer or his authorized representative for inspection and/or testing as specified in 4.2. The approval of the first article authorizes the commencement of production but does not relieve the contractor of responsibility for compliance with all applicable provisions of this specification. The first article shall be manufactured by the contractor in the same facilities to be used for the manufacture of the production items.

3.3. Material. Material shall conform to the referenced specifications and to the requirements specified herein.

3.3.1 Copper base alloys. Copper base alloys shall be roll polished, free from pits, scale (including red oxide), dents nicks, cracks, scratches, segregations, and foreign inclusions that will not be removed in later processing. When tested as specified in 4.4.1, the chemical compositions of the applicable copper base alloys shall be as specified in table 1.

TABLE I. Chemical Composition of copper base alloys

Copper base alloy	Copper	Nickel 1/	Lead (max)	Iron (max)	Manganese (max)	Zinc	Others (max)
Red brass	84.0 to 86.0		.05	.05		Remainder	.15
Gilding metal	94.0 to 96.0		.03	.05		Remainder	.13
Nickel silver	63.0 to 2/ 66.5	16.5 to 19.5	.10	.25	.50	Remainder	
Free cutting brass	60.0 to 63.0		2.5 to 3.75	.35		Remainder	.50 total

1/ Cobalt counting as nickel.

2/ Copper content for nickel silver pin only may be 53.5 to 56.5 percent.

3.3.2 Gold for plating. Gold for plating shall be 24 karat.

3.3.3 Sterling silver. Sterling silver shall be not less than 92.5 percent pure silver.

3.3.4 Stones.

3.3.4.1 Diamond. When a diamond is required, the diamond shall be a single cut, white diamond of Grade A quality and shall weigh not less than 3 points of a karat.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:21Z
Check the source to verify that this is the current version before use.

3.3.4.2 Blue sapphire. When a sapphire is required, the sapphire shall be a synthetic blue sapphire of good commercial quality and shall have a stone size of not less than 5.

3.3.4.3 Ruby. When a ruby is required, the ruby shall be synthetic ruby of good commercial quality and shall have a stone size of not less than 5.

3.3.5 Enamel. Enamel shall be a glass, vitreous type enamel fused with metallic oxides to produce the color matching TIOH Color Chip No. 18.

3.3.6 Lacquer. Lacquer shall be pale clear synthetic lacquer. The use of pigmented lacquer shall not be permitted.

3.3.7 Solder.

3.3.7.1 Hard solder. Hard solder shall be a silver solder having a melting point of not less than 1075 degrees F.

3.3.7.2 Soft solder. Soft solder shall be a lead-thin alloy having a melting point of not less than 375 degrees F.

3.3.8 Rivets. Rivets shall be solid, and may be soldered to the device, or may be drawn up from the device or wreath at the option of the manufacturer.

3.3.9 Jump rings. Jump rings shall be fabricated from the same material and have the same finish as the emblem. The jump ring shall be oval in shape, 1/4 $\pm$ 1/64 inch long by 3/16 $\pm$ 1/64 inch wide and shall be formed from .040 $\pm$ .003 inch diameter wire.

3.4 Design. The embossed design on the emblems shall be an exact replica of the design on the Government furnished hub from which the contractor's working dies shall be extracted. The working die(s) shall be tooled and polished to remove any dents, nicks, scratches, or other imperfections. The design of all grades and classes are identical to the design illustrated with the following exceptions:

Grade A, class 1 emblems shall have a diamond specified in 3.3.4.1, set in the wreath in lieu of the enameled area shown. The diamond shall be secured in a four bead setting.

Grade A, class 2 emblems shall have a blue sapphire specified in 3.3.4.2, set in the wreath in lieu of the enameled area shown. The sapphire shall be secured in a two bead setting.

Grade A, class 3 emblems shall have a ruby specified in 3.3.4.3, set in the wreath in lieu of the enamelded area. The ruby shall be secured in a two bead setting.

Grade A, classes 4 and 5 and grades B and C shall have the appropriate year indicated. The Government furnished tools shall not contain the year numeral. These must be cut into the contractor's working dies. The numerals shall be standard arabic numerals 1/16 inch high and located as shown on figure 1.

3.5 Construction.

3.5.1 Stamping, trimming, and piercing. Emblems shall be struck in a manner to insure a well defined die struck edge. They will be trimmed and when applicable, pierced to the die struck outline. All edges shall be clean, smooth, and free from burrs, drag, step, or rough edges. The stamping, trimming, and

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:21Z
Check the source to verify that this is the current version before use.

piercing operation shall not damage or distort the design or alter the shape of the emblems.

3.5.2 Soldering and electronic fusion. At the option of the manufacturer, attaching devices may be hard soldered or electronically fused in the location specified in 3.6.2. Hard soldered parts shall be completely joined without excess solder and all excess flux shall be removed, Unless otherwise specified. All soldering shall be accomplished using solder specified in 3.3.7.1 and complete contact shall be made between the soldered parts. When tested as specified in 4.4.2, the soldered parts shall not separate. When tested as specified in 4.4.7, the fused prongs shall not separate at the fused joint.

3.5.3 Riveting. All rivets shall be securely spun in a manner to insure a tight close fit between component parts. When the rivets are not drawn out on the eagle or wreath, they shall be soldered to the eagle or wreath in a location that will insure noninterference with the placement of the attaching device. The rivets shall be a minimum of 0.055 inch in diameter, formed from any type brass and shall be of sufficient length to insure proper fit after the riveting operation is completed.

3.6 Construction.

3.6.1 General. The eagle shall be secured to the wreath by means of two rivets. One rivet shall be located on each of the eagle's wings in position to pierce the platformed areas of the wreath during assembly and to center the eagle on the vertical centerline of the wreath with the bottom of the tail feather 5/32 $\pm$ 1/64 inch above the bottom of the wreath.

3.6.2 Details.

3.6.2.1 Style 1. The style 1 emblem constructed as specified in 3.6.1, shall have a prong and flat ball clutch type attaching device as shown on figure 2. The prong shall be made from nickel silver , and shall be 5/16 $\pm$ 1/64 inch in length. The prong shall be soldered or fused so as to be centered on the reverse of the glory in the eagle device. When tested as specified in 4.4.4, the clutch shall not be removable from the prong without release of the ball.

3.6.2.2 Style 2. The style 2 emblem constructed as specified in 3.6.1 shall be centered on the vertical centerline of a disk shown on figure 3. The emblem shall be secured to the disk by means of two rivets, or soft soldering using solder specified in 3.3.7.2. The rivets may be an integral part of the wreath or may be soldered on the wreath, one at each intersection of the horizontal centerline of the wreath and the center of each wreath arm. The disk shall be fabricated from the same material as the emblem. Each disk shall have a jump ring as specified in 3.3.9 attached.

3.6.2.3 Style 3. The style 3 emblem constructed as specified in 3.6.1, shall have prong and ball type clutch with chain and bar in accordance with figure 4. The prong made from nickel silver, shall be 3/8 $\pm$ 1/64 inch long and shall be soldered or fused so as to be centered on the reverse of the glory of the eagle

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:21Z
Check the source to verify that this is the current version before use.

device. The clutch, chain, and bar shall be fabricated from any type brass. The tie tac chain wire shall be 0.025 ± 0.002 inch thick. The links, forming the chain, shall be of curved design and there shall be 12 links to the inch. The overall length of the chain shall be 1-3/8 ± 1/8 inches. One end of the chain shall be securely attached to the clutch by means of a hole drilled in the body of the clutch. The other end shall be attached to the bar by means of a ring through a hole located in the center of the bar. The bar shall not be less than 0.6875 inch in length, 0.100 inch in width, and 0.049 inch thick, measured at the thickest portion; if the lengthwise edges are beveled. When tested as specified in 4.4.4, the clutch shall not release from the post without releasing the ball.

3.6.2.4 Style 4. The style 4 emblem constructed as specified in 3.6.1, shall have a pin and catch type attaching device in accordance with figure 5, or a single unit back attaching device suitable for the purpose intended. either device shall be not less than 9/16 inch long and of an appropriate thickness acceptable for regular commercial practice. The device used shall be fabricated from nickel silver, and shall be soldered or fused to the back of the wreath. When viewing from the reverse, the catch shall be located at the bottom left hand upright of the wreath and the joint shall be located at the top right hand upright of the wreath. The point end of the pin stem shall extend not less than 1/32 inch beyond the rotor of the catch and not more than 1/32 inch beyond the catch. When tested as specified in 4.4.3, the joint, pin stem, and catch show no signs of looseness.

3.7 Finish.

3.7.1 General requirements. The front and edges of all emblems shall be finished as specified herein and shall match the finish on the standard or approved sample. Where plating or oxidizing is specified, the entire emblem shall be plated or oxidized as applicable. The backs of plated emblems shall be bright. The backs of oxidized emblems shall be clean. In addition to the finish specified, all emblems shall be lacquered. When a clutch or clutch with chain and bar are required, they shall be gold plated for grades A or C emblems and nickel plated for grade B emblems.

3.7.1.1 Cutting down. When necessary to remove nicks, scratches, inequalties, edges, pores, or other blemishes, the lapel buttons shall be cut down by means of grease or oil buffing. The emblems shall not be cut down to the extent that any of the design is obscured.

3.7.1.2 Gold plating. Prior to plating, emblems shall be cleaned of all matter which may affect the plating. The plating shall be nonporous and continous over the plated surface. There shall be no cut-through, peeled, or blistered plating. Gold specified in 3.3.2 shall be used for gold plating. The use of white metal as an under plating shall not be permitted. When tested as specified in 4.4.5, no visible chemical reaction such as evolution of gases shall appear.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:21Z
Check the source to verify that this is the current version before use.

3.7.1.3 Enameling. All enameling shall be accomplished using enamel specified in 3.3.5. Enamel shall be applied so as to be uniform in color, free from bubbles, foreign inclusions, cracking, crazing, or other defects which might affect appearance. There shall be no overruns of enamel. The enamel shall be charged, fired, and unless otherwise specified, stoned level with dikes. The enamel shall then be lapped, felted, or wheel polished to produce a glass like finish.

3.7.1.4 Lacquering. After finishing, all emblems shall be thoroughly covered with lacquer specified in 3.3.6. The dry lacquer film shall be continuous, level, adherent, and free from lint, dust, and other inclusions. There shall be no change in the appearance of the lacquered surface except for a slight yellow around the highlights when tested as specified in 4.4.6.1. When tested as specified in 4.4.6.2, the tissue paper shall not adhere to the lacquered surface. Gold plated emblems may be lacquered at the option of the manufacturer.

3.7.2 Detailed finish requirements.

3.7.2.1 Grade A. All grade A emblems shall have a gold plated satin finish with lightly polished highlights. When a style 2 emblem is required, the disk shall have a polished gold plated finish.

3.7.2.2 Grade B. Grade B emblems shall have an oxidized relieved satin finish. When a style 2 emblem is required, the disk shall have a satin finish.

3.7.2.3 Grade C. Grade C emblems shall have an oxidized relieved satin finish. When a style 2 emblem is required, the disk shall have a satin finish.

3.8 Marking for identification. The contractor shall stamp his trademark or other identifying mark legibly and inconspicuously on the back of each emblem. In addition, precious metal items shall bear a quality marking.

3.9 Government loaned property. Hubs will be loaned by the Government and shall be used only for making the contractor's working dies necessary for one contract or order.

3.10 Workmanship. Emblems shall be clean, well made, and shall meet the acceptable quality levels established by this specification.

4. QUALITY ASSURANCE PROVISIONS.

4.1 Responsibility for inspection. Unless otherwise specified in the contract or purchase order, the contractor is responsible for the performance of all inspection requirements specified herein. Except as otherwise specified in the contract or order, the contractor may use his own or any other facilities suitable for the performance of the inspection requirements specified herein, unless disapproved by the Government. The Government reserves the right to perform any of the inspections set forth in the specification that are deemed

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:21Z
Check the source to verify that this is the current version before use.

necessary to assure that supplies and services conform to the prescribed requirements.

4.2 First article inspection. Inspection and testing of the first article shall be made on a completely fabricated emblem for all provisions of this specification applicable to end product examination and testing.

4.3 Sampling for inspection and acceptance. Sampling for inspection and acceptance shall be in accordance with MIL-STD-105, except where otherwise indicated.

4.3.1 Inspection of components.

4.3.1.1 Testing of components. In addition to the quality assurance provisions of the subsidiary specifications and drawing, inspection shall be performed on components and materials listed in table II for the test characteristics shown therein. The inspection level shall be S-1.

TABLE II. Testing components

Component and lot expressed in terms of	Characteristic	Rqm't para	#determs per s/u	Test method	Results reported as	S/U
Copper base alloy (as applicable (1 lb)	Chemical composition	3.3.1 and table 1	2 for each element (composite)	4.4.1	To nearest 0.1% for each element	4 oz material for ea. alloy, 10 ea. attaching devices; as applicable

4.3.1.2 Certification of compliance. Components and materials listed below may be accepted on the basis of contractor's certification of compliance for requirements specified in the applicable paragraphs of this specification.

Component	Characteristic	Requirement Paragraph
Sterling silver 1/	Fineness	3.3.3
Gold for plating	Karat	3.3.2
Solder	Material identification	3.3.7.1 or 3.3.7.2
Enamel	Material identification	3.3.5
Rivet	Material identification	3.3.8
Jewel	Grade, number of points, or size	3.3.4
Gold plating	No white metal used as an underplating	3.7.1.2

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:21Z
Check the source to verify that this is the current version before use.

1/ In addition to the certificates of compliance, basis for acceptance may be the contractor's quality marking. The Government reserves the right to select samples of the silver and gold to such extent as it deems advisable (and without additional cost to the Government) for the purpose of verifying the accuracy of contractor's certification.

4.3.2 Inspection of the end item.

4.3.2.1 Visual inspection of end items. The defects found during examination shall be classified in accordance with 4.3.2.1.1 and 4.3.2.1.2. The lots shall be inspected in accordance with 4.3.2.1.3. The unit of product for these examinations shall be one completely fabricated emblem. These examinations shall be made from normal viewing distance of 16 to 22 inches and under illumination equal to average daylight.

4.3.2.1.1. Examination of end items for defects in finish, design, material, construction, workmanship, and marking. Defects designated by an asterik (*) shall be classified as major when seriously affecting appearance or serviceability and minor when affecting appearance or serviceability, but not seriously.

Examine	Defects	Classification		
		Major	(*)	Minor
Front and edges (as applicable)				
Color and finish	Color or finish of metal does not compare favorably with standard or approved sample.....	X	-	-
	Color or shade of enamel (when applicable) does not compare favorably with standard or approved sample.....	X	-	-
	Discoloration, such as spot, stain, or speck.....	-	*	-
	Not clean.....	-	-	X
	Any solder spatter exposed or concealed by plating.....	-	*	-
	Oxidized finish has not been sufficiently relieved, or has been excessively relieved.....	X	-	-
	Background is not finished as specified.....	-	*	-

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:21Z
Check the source to verify that this is the current version before use.

Examine	Defects	Classification		
		Major	(*)	Minor
Enameling (when required)	Enameled area cracked, crazed, or chipped	-	*	-
	Enameled area containing lump, bubble, pit, blister, scratch, lap, overrun, or skin	-	*	-
	Any fishscale, copperheads, burn-offs, scale or specking	-	*	-
	Not smooth	-	*	-
	Enameled area containing a hole, extending through enamel base metal	X	-	-
	Not clean, e.g., blemish such as spot, stain, spatter, or imbedded foreign matter	-	*	-
	Enamel missing	X	-	-
	Scumming, darkened, burned edges, or lack of gloss	-	*	-
	Not level with dikes, e.g., contains high or low spots	-	*	-
	Any enamel not contained within prescribed outline of design	X	-	-
Quality of metal (not plated item)	Surface is pitted, porous, crystalline, open grained, or otherwise impared	X	-	-
Lacquering	Lacquer coating hazy, cloudy, or powdering	-	-	X
	Foreign matter imbedded in finish	-	*	-
	Lacquer not smooth, not continuous, or adherent, i.e., flaking, blistering, rippling, peeling, or has been run, sag, or drops	-	*	-
	Lacquer not set to touch	-	-	X
	Coating or lacquer omitted (when required)	X	-	-
Design	Construction or design details altered or obscured or not conforming to Government hub	X	-	-
	Any significant detail not clear, missing , or obliterated, i.e., does not compare favorably with approved sample	X	-	-
	Any significant detail marred or reduced	X	-	-
	Any wrap, twist, or distortion production irregular surface contour or outlined	X	-	-
	Any detail struck over resulting in a double impression	X	-	-
	Any area not pierced, when required	X	-	-

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:21Z
Check the source to verify that this is the current version before use.

Examine	Defects	Classification Major	(*)	Minor
Quality of Plating	Surface spotted or open grained, i.e., appearing as pitted, porous, or crystalized.....	X	-	-
	Any plated area cut through, not continuous, broken, peeling, blistered, or otherwise impaired....	-	*	-
	Not plated when required or plating is not specified type.....	X	-	-
Workmanship and construction	Surface or edge not clean, not smooth, or not free from burrs, roughness, drag, step, or tool marks.....	-	*	-
	Metal marks on exposed surface, such as nick, dent, dig, gouge, or scratch	-	*	-
	Not timmmed to the die-struck edge....	-	*	-
	Dikes or numerals are distorted.....	-	*	-
	Pierced edge not clean and smooth, e.g., any burr, drag, cutter, or file mark	-	*	-
	Design or shape is damaged, distorted, or altered by piercing operation.....	-	*	-
	Superimposed device is not securely riveted to the base, i.e., rivet is loose, poorly or insufficiently peened, or swaged.....	X	-	-
	Riveted device is not closely fitted to the contour of the base.....	-	*	-
	Superimposed devices is not centered or positioned as required.....	-	*	-
Soldering	Solder does not completely unite superimposed design to base, i.e., perceptible opening between component parts.....	-	*	-
	Area burned or reduced in soldering...	-	*	-
Back: Finish and Construction	Not finished as specified.....	X	-	-
	Not flat (except as otherwise specified).....	-	*	-
	Not clean, i.e., discoloration, such as spot or stain	-	-	X
Attaching device (Findings)	Defective, i.e., any part damaged or deformed which affects use or which may be expected to effect use.....	X	-	-
	Deformed, i.e., any part misshaped bent, damaged, but not affecting use.....	-	-	X
	Not type specified.....	X	-	-
	Not positioned as specified, i.e., not conforming to specification.....	-	*	-

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:21Z
Check the source to verify that this is the current version before use.

Examine	Defects	Classification Major	(*)	Minor
	Point of pin extends less than 1/32 inch beyond rotor of the catch.....	X	-	-
	Point of pin protrudes greater than 1/32 inch beyond the catch.....	-	-	X
	Clutch will not engage or is loose fit on prong.....	-	*	-
	Any component omitted, misplaced, operation omitted, or not properly performed.....	X	-	-
Soldering	Solder does not completly unite component part to base, i.e., any perceptible opening between component parts.....	-	*	-
	Joints not clean smooth, e.g., flux or excess solder not removed...	-	-	X
	Metal burned or reduced in soldering or acid cleaning.....	-	-	X
	Solder spatter exceeding 3/16 inch in maximum direction.....	-	-	X
Marking (identification and quality)	Missing, illegible, misspelled, incorrect, not stamped, or not inconspiciously placed.....	-	-	X

4.3.2.1.2 Examination of end items for defects in dimensions. Any dimension that is not within the specified tolerance shall be classified as a defects.

4.3.2.1.3 Inspection levels and AQL's. The inspection level and acceptable quality level (AQL's) expressed in defects per hundred units (dhu) shall be as follows:

	Inspection level	AQ's Major	Total
For defects applicable to 4.3.2.1.1	II	2.5	10.0
For defects applicable to 4.3.2.1.2	S-1	(one class)	4.0

4.3.2.2 Testing of the end items. Testing of the completely fabricated emblems shall be performed in accordance with table III for the characteristics shown therein. The sample unit shall be four emblems of each style, grade, or class. The inspection level shall be S-1 and the AQL shall be 6.5 defects per hundred units.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:21Z
Check the source to verify that this is the current version before use.

TABLE III. Testing of the end item

Characteristic	Rqm't Para	Test Method	Rqm't appli Indiv unit	#determ per s/u	Results reported as
Test for solder joints	3.5.2	4.4.2	X	1	Pass or fail
Test for pins hinges and safety catches	3.6.2.4	4.4.3	X	1	Pass or fail
Test for clutch type setting devices	3.6.2.1 and 3.6.2.3	4.4.4	X	1	Pass or fail
Acid test for gold plating	3.7.1.2	4.4.5	X	1	Pass or fail
Test for lacquer; liver or sulfur test	3.7.1.4	4.4.6.1	X	1	Pass or fail
Test for tackiness	3.7.1.4	4.4.6.2	X	1	Pass or fail
Test for fused joints	3.5.2	4.4.7	X	1	Pass or fail

4.3.3 Examination for count of emblem in intermediate containers. Emblems packaged for shipment be examined to determine conformance with specific or marked quantity. The sample unit for this examination shall be one box (interior package). The lot size shall be the number of intermediate containers. Any box containing less than the specified or marked quantity of emblems shall be classified as a defect. The inspection level shall be S-2 and the AQL shall be 4.0 defects per hundred units.

4.3.4 Examination of preparation for delivery requirements. An examination shall be made to determine that packaging, packing, and marking requirements of section 5 of this specification are complied with. Defects shall be scored in accordance with the list below. The sample unit shall be one shipping container fully prepared for delivery with the exception that it need not be sealed. Defects of closure listed below shall be examined on shipping containers fully prepared for delivery. The lot size shall be the number of shipping containers in the end item inspection lot. The inspection level shall be S-2 and the AQL shall be 4.0 defects per hundred units.

Examine	Defect
Marking (exterior and interior)	Omitt, incorrect, illegible, of improper size, location, sequence, or method of application.
Materials	Any component missing. Any component damaged, affecting serviceability.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:21Z
Check the source to verify that this is the current version before use.

Examine	Defect
Workmanship	Inadequate application of components, such as incomplete closure of container flaps, loose strapping, or taping, inadequate stapling.
Weight and content	Number per intermediate box is more or less than required; net weight exceeds requirements.

4.4 Tests.

4.4.1 Chemical composition test. Chemical composition shall be determined in accordance with test method number 111 of FED-STD-151. Results shall be evaluated to determine compliance with the requirements specified in 3.3.1.

4.4.2 Test of soldered joints.

4.4.2.1 Hard solder. Emblems shall be placed in an oven maintained at 1065 degrees F., plus or minus 5 degrees F., for 15 minutes. While at this temperature the emblems shall be lifted by the attaching device and shall be inspected to determine compliance with the requirements specified in 3.5.2.

4.4.2.2 Soft solder. Emblems shall be placed in an oven maintained at 365 degrees F., plus or minus 5 degrees F., for 15 minutes. While at this temperature the emblem shall be lifted from the disc and shall be examined to determine compliance to 3.5.2.

4.4.3 Test for pins, hinges, and safety catches. Safety catches and pins shall be opened and closed 10 times, after which the pins, hinges, and safety catches shall be inspected to determine compliance with the requirements specified in 3.6.2.4.

4.4.4 Test for clutch type attaching device. The clutch shall be removed and replaced 10 times from the prong. An attempt shall then be made to remove the clutch by hand during which time the clutch and prong shall be inspected to determine compliance with the requirements specified in 3.6.2.1 or 3.6.2.3, as applicable.

4.4.5 Acid test for gold plating. At room temperature (60 to 80 degrees F.) place a drop of test acid on two different spots on the gold plated surface allowing the drops to remain for not less than 1 minute, during which time the surface of the emblems shall be inspected to determine compliance with the requirement specified in 3.7.1.2. The test acid shall be a solution 50 percent of volume of CP nitric acid (specific gravity 1.42) and equal volume of distilled water. Care should be taken to assure drops are not placed in the riveted areas.

4.4.6 Test for lacquer.

4.4.6.1 Liver of sulfur test. Emblems to be tested shall be immersed in 2 percent weight CF liver of sulfur Sulfated potash) water solution, at a temperature of 100 degrees F. (Plus or minus 10 degres F) for a period of 3 minutes. The emblems shall then be removed and rinsed in warm, then cold, then

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:21Z
Check the source to verify that this is the current version before use.

hot water. Emblem shall be wiped gently with an absorbent cellulose material or whirled to remove residual moisture and shall be air dried at room temperature (60 to 80 degrees F) for 1 hour. The emblem shall then be inspected to determine compliance with the requirements specified in 3.7.1.4.

4.4.6.2 Tackiness test. At room temperature (60 to 80 degrees F.), press a piece of tissue paper against the lacquered surface for 15 seconds, using any pressure capable of being exerted between thumb and two fingers, after which, the pressure shall be released and then emblems inspected to determine compliance with requirement specified in 3.7.1.4.

4.4.7 Test for electronically fused joints. Items to be tested shall be anchored on a horizontal surface. The prong shall be grasped at least 1/3 its length above the fused joint and bent through an angle of 90 degrees (45 degrees to each side of the vertical) until separation occurs. The fused joint shall then be examined to determine compliance with 3.5.2. A bending tool in the form of a 45 degree template may be used for this test provided the prong is gripped at least 1/3 its length above the fused joint.

5. PREPARATION FOR DELIVERY.

5.1 Packaging. Packaging shall be level A or C, as specified (see 6.2).

5.1.1 Level A.

5.1.1.1 Unit packaging. Each emblem shall be placed on a polyethlene pad and packaged in a plastic box having a transparent lid and opaque bottom section. The box shall have two plastic hinges and catches and shall be approximately 1-1/8 $\pm$ 1/16 inch square and 5/8 $\pm$ 1/16 inches overall depth. The pad shall be size to fit the box interior and shall be of sufficient depth to restrict movement of the charm when the lid is closed.

5.1.1.2 Intermediate packaging. Forty emblems of one grade, style, or class only in a unit package specified in 5.1.1.1 shall be packaged in a snug-fitting setup paperboard box conforming to type 1, variety 2, style 3, or class C of PPP-B-676. Closure shall be in accordance with the appendix of the container specification. As an alternate method the use of Scotch Brand Box Closing Filament Tape No. 898, or equal, 1/2", using a minimum of two 1/2" x 4" ("L" Clips) on each edge, may be utilized for effecting closure of set-up boxes.

5.1.2 Level C. Emblems shall be preserved and packaged to afford adequate protection against corrosion, deterioration, and damage during shipment from supply source to first receiving activity. The supplier may use his standard practice when it meets these requirements.

5.2 Packing. Packing shall be level A, B, or C, as specified (see 6.2).

5.2.1 Level A. Emblems of one grade, style, and class only packaged as specified in 5.1, shall be packed in quantaties as specified in the contract or order in a snug-fitting shipping container conforming to type CF, class weather

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:21Z
Check the source to verify that this is the current version before use.

resistant of PPP-B-636. Closure, waterproof sealing, and reinforcing of the container shall be in accordance with the appendix of the container specification.

5.2.2 Level B. Emblems of one grade, style, and class only packaged as specified in 5.1, shall be packed in a snug-fitting fiberboard shipping container conforming to class domestic grade 275 of PPP-B-636. Closure and reinforcing of the containers shall be in accordance with the appendix of the container specification.

5.2.3 Level C. Emblems of one grade, style, and class only shall be packed in a manner to insure carrier acceptance and safe delivery at destination at the lowest transportation rates for such supplies. Containers shall be in accordance with the rules and regulations of the carriers applicable to the mode of transportation.

5.3 Marking.

5.3.1 Civil agencies. In addition to markings required by the contract or order, the intermediate containers and shipping containers shall be marked in accordance with FED-STD-123.

5.3.2 Military agencies. In addition to markings required by the contract or order, the intermediate containers and shipping containers shall be marked in accordance with MIL-STD-129.

6. NOTES AND CONCLUDING MATERIAL.

6.1 Intended use. Emblems covered by the specification are intended to be worn to signify the wearer has completed a designated number of years in Government service.

6.2 Ordering data. Purchasers should select the preferred options permitted herein and include the following information in procurement documents:

a. Title, number, and date of this specification.

b. Style, grade, and class emblem required (see 1.2.1).


c. When a standard sample will not be furnished (see 3.1).


d. When a first article is not required (see 3.2).

e. Selection of the applicable levels of packaging and packing (see 5.1 and 5.2).

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:21Z
Check the source to verify that this is the current version before use.



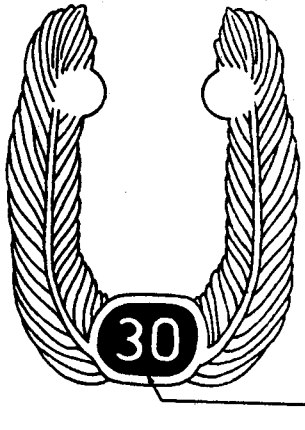

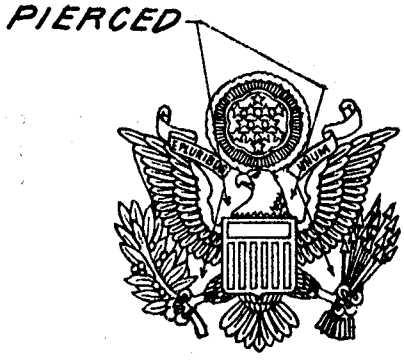

MATERIAL:
- GRADE A: GILDING METAL
- GRADE B: STERLING SILVER
- GRADE C: GILDING METAL


DIMENSIONS (INCHES)
- HEIGHT (OVERALL):
  - EAGLE: 1/2 (REF)
  - WREATH: 21/32 (REF)
- WIDTH (OVERALL):
  - EAGLE: 7/16 (REF)
  - WREATH: 1/2 (REF)
- THICKNESS:
  - EAGLE (AT SHIELD): .075 ± .005
  - WREATH (ENAMEL AREA): .040 ± .005
  - ASSEMBLED (THICKEST POINT): .135 (REF)

FINISH: AS SPECIFIED IN 3.7.2


NOTES:
1. REFERENCE DIMENSIONS ARE FURNISHED AS AN AID TO BIDDING ONLY. ACTUAL DIMENSIONS ARE CONTROLLED BY THE GOVERNMENT FURNISHED HUB.

FIGURE 1

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:21Z
Check the source to verify that this is the current version before use.



FLAT BALL TYPE CLUTCH

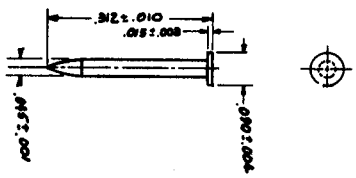


PRONG

DIMENSIONS (INCHES): AS SHOWN

NOTES:
1. THIS TYPE ATTACHING DEVICE IS USED ON STYLE 1 EMBLEMS.

FIGURE 2

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:21Z
Check the source to verify that this is the current version before use.

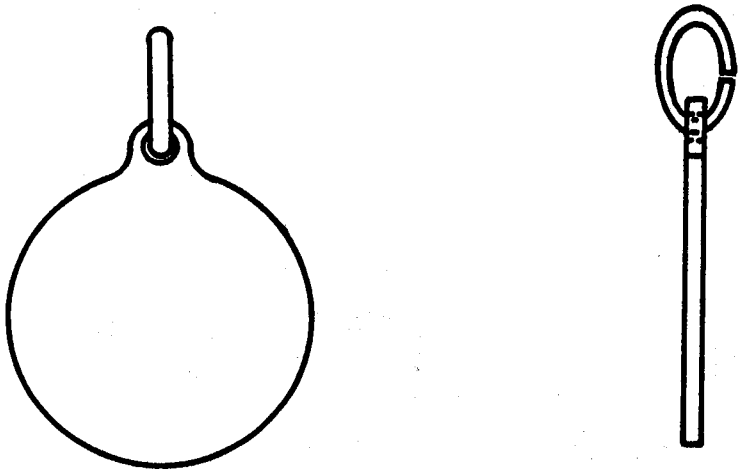


DIMENSIONS (INCHES):
- DISK:
  - DIAMETER: 3/4 ± 1/64
  - THICKNESS: .030, +.010, -.000
- LUG:
  - HEIGHT: 1/8, +1/64, -0
  - WIDTH: 1/8, +1/64, -0
  - HOLE DIAMETER: 1/16, +1/64, -0


NOTES:
1. THIS TYPE ATTACHING DEVICE TO BE USED ON STYLE 2 EMBLEMS.

FIGURE 3

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:21Z
Check the source to verify that this is the current version before use.

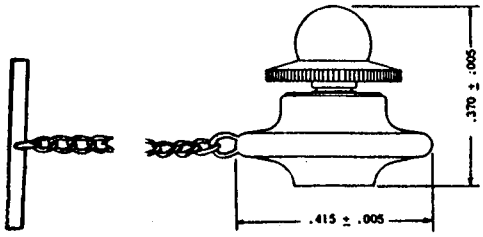

BALL TYPE CLUTCH




PRONG

DIMENSIONS (INCHES): AS SHOWN


NOTES:
1. THIS TYPE ATTACHING DEVICE TO BE USED ON STYLE 3 EMBLEMS.

FIGURE 4


Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:21Z
Check the source to verify that this is the current version before use.

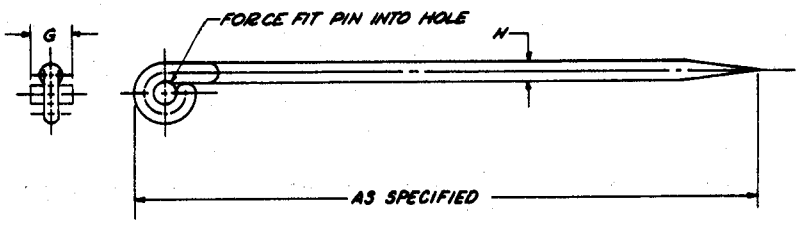

PIN STEM



JOINT



TOP OPENING TYPE

CATCH

LGTH OF PIN STEM	A	B	C	D	E	F	G	H
TO 11/16"	.120	.102	.127	.110	.087	.085	.087	.088-.088

NOTES:
1. THIS TYPE ATTACHING DEVICE TO BE USED ON STYLE 4 EMBLEMS.

FIGURE 5

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:21Z
Check the source to verify that this is the current version before use.

MILITARY INTERESTS:

Military Custodians

Army - IH
Navy - NU
Air Force - 99

Review activities

Army - IH
Navy - MC

User Activity

Air Force - 45

CIVIL AGENCY COORDINATING ACTIVITIES:

GSA - FSS
VA - DMS
USDA
DOT
SDV

PREPARING ACTIVITY:

Army - IH

Project Number 8455-0844

Orders for this publication are to be placed with General Services Administration, acting as an agent for the Superintendent of Documents. See Section 2 of this specification to obtain extra copies and other documents referenced herein.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:21Z
Check the source to verify that this is the current version before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

INSTRUCTIONS: This form is provided to solicit beneficial comments which may improve this document and enhance its use. DoD contractors, government activities, manufacturers, vendors, or other prospective users of the document are invited to submit comments to the government. Fold on lines on reverse side, staple in corner, and send to preparing activity. Attach any pertinent data which may be of use in improving this document. If there are additional papers, attach to form and place both in an envelope addressed to preparing activity. A response will be provided to the submitter, when name and address is provided, within 30 days indicating that the 1426 was received and when any appropriate action on it will be completed.
NOTE: This form shall not be used to submit requests for waivers, deviations or clarification of specification requirements on current contracts. Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document(s) or to amend contractual requirements.

DOCUMENT IDENTIFIER *(Number)* AND TITLE

V-L-70D

NAME OF ORGANIZATION AND ADDRESS OF SUBMITTER

☐ VENDOR ☐ USER ☐ MANUFACTURER

1. ☐ HAS ANY PART OF THE DOCUMENT CREATED PROBLEMS OR REQUIRED INTERPRETATION IN PROCUREMENT USE? ☐ IS ANY PART OF IT TOO RIGID, RESTRICTIVE, LOOSE OR AMBIGUOUS? PLEASE EXPLAIN BELOW.

A. GIVE PARAGRAPH NUMBER AND WORDING

B. RECOMMENDED WORDING CHANGE

C. REASON FOR RECOMMENDED CHANGE(S)

2. REMARKS

SUBMITTED BY *(Printed or typed name and address — Optional)*

TELEPHONE NO.

DATE

DD FORM 1426 1 OCT 76

EDITION OF 1 JAN 72 WILL BE USED UNTIL EXHAUSTED.

* U.S. GOVERNMENT PRINTING OFFICE: 1982 361-705/1338

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:21Z
Check the source to verify that this is the current version before use.

FOLD

DEPARTMENT OF THE ARMY
THE INSTITUTE OF HERALDRY, US ARMY
CAMERON STATION
ALEXANDRIA, VA 22314
OFFICIAL BUSINESS
PENALTY FOR PRIVATE USE $300

POSTAGE AND FEES PAID
DEPARTMENT OF THE ARMY
DOD 314

U.S.MAIL

DIRECTOR
THE INSTITUTE OF HERALDRY, US ARMY
CAMERON STATION
ALEXANDRIA, VA 22314

FOLD

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:21Z
Check the source to verify that this is the current version before use.