MIL-C-60250A(MU)
18 June 1970
SUPERSEDING
MIL-C-60250(MU)
4 April 1966

MILITARY SPECIFICATION

CASES, CARRYING: 10541026 and 10541038

1. SCOPE

1.1 This specification covers two carrying cases for Rangefinder, AN/GVS-3 (see 6.1). An interlocking slide fastener provides for opening and closing the cases. The differences between the two cases are the size and configuration of the shells.

2. APPLICABLE DOCUMENTS

2.1 The following documents, of the issue in effect on date of invitation for bids or request for proposals, form a part of this specification to the extent specified herein.

SPECIFICATIONS

Military

MIL-F-13926	Fire Control Materiel, General Specification Governing the Manufacture and Inspection of
MIL-I-45607	Inspection Equipment, Acquisition, Maintenance and Disposition of
MIL-P-14232	Parts, Equipment, and Tools for Army Materiel; Packaging and Packing of

STANDARDS

Military

MIL-STD-105	Sampling Procedures and Tables for Inspection by Attributes
MIL-STD-109	Quality Assurance Terms and Definitions
MIL-STD-810	Environmental Test Methods

DRAWINGS

U. S. Army, Frankford Arsenal

F10540501	Range Finder Laser, AN/GVS-3
F10541026	Case, Carrying: 10541026
F10541038	Case, Carrying: 10541038
F10541078	Tripod Assembly
F10541111	Adapter, Mount Assembly

FSC 1240

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T00:23Z
Check the source to verify that this is the current version before use.

PACKAGING DATA SHEETS

10541026	Packaging of Case, Carrying: 10541026
10541038	Packaging of Case, Carrying: 10541038

(Copies of specifications, standards, drawings, and packaging data sheets required by suppliers in connection with specific procurement functions should be obtained from the procuring activity or as directed by the contracting officer.)

3. REQUIREMENTS

3.1 Fabrication.- The cases covered in this specification shall be manufactured in accordance with the applicable drawing listed in 2.1 and drawings pertaining thereto.

3.2 Orientation.- Wherever "case with contents" is specified, the following requirements shall be met with a load, representative of the intended contents (see 6.1), positioned in the case.

3.2.1 Storage temperature.- The case shall show no evidence of physical damage after the case, with contents is thermally stabilized at temperatures -80° and +160°F. Subsequent to exposure to the temperatures specified herein, the movable parts of the case shall be operable and show no signs of damage.

3.2.2 Operability of movable parts.- The interlocking slide fastener, cover hinge, shoulder strap buckle, and mechanical strap fasteners shall be manually operable while the case, with contents, is thermally stabilized at temperatures of -65° and +150°F. The moving parts of the case shall be operable at all temperatures between -65° and +155°F.

3.2.3 Shock.- The requirements of 3.2.3.1 and 3.2.3.2 shall be met while the case, with contents, is thermally stabilized at -65°F,+155°F and temperatures between +70° and 80°F.

3.2.3.1 Suspended drop.- The case with contents shall show no evidence of physical failure after being dropped the full distance permitted by suspending the case from the approximate center of the full length of the shoulder strap.

3.2.3.2 Free drop.- The case shall incur no damage other than minor dents when the case with contents is dropped from a height of 36 inches onto a solid wood floor.

3.3 Interface requirements.- Carrying Cases 10541026 and 10541039 shall interface with and support intended contents.

3.4 Stitching.- Each sequence of stitches shall be backstitched with a minimum of three stitches at each end.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T00:23Z
Check the source to verify that this is the current version before use.

3.5 Workmanship.- The ends of the stitching thread shall be not more than 1/32 inch beyond the first and last stitch of each sequence of stitches. There shall be no exposed ragged edges which may affect the appearance of the case or permit unraveling of the strap material.

4. QUALITY ASSURANCE PROVISIONS

4.1 Responsibility for inspection.- Unless otherwise specified in the contract or purchase order, the supplier is responsible for the performance of all inspection requirements as specified herein. Except as otherwise specified, the supplier may utilize his own facilities or any other facilities suitable for the performance of the inspection requirements specified herein, unless disapproved by the Government. The Government reserves the right to perform any of the inspections set forth in the specification where such inspections are deemed necessary to assure supplies and services conform to prescribed requirements.

4.1.1 General provisions.- The component and subassembly inspection requirements of MIL-F-13926 form a part of the Quality Assurance Provisions of this specification. Definitions of inspection terms shall be as listed in MIL-STD-109.

4.2 First article (initial production) approval.- The requirement for first article approval and the responsibility (Government or contractor) for first article testing shall be as specified in the contract. The sample for first article approval tests shall consist of two (2) container assemblies manufactured in the same manner using the same materials, equipment, processes, and procedures as used in regular production. All parts and materials shall be obtained from the same source of supply as used in regular production.

4.2.1 Government testing.- When the Government is responsible for conducting first article approval tests, the contractor, prior to submitting the sample to the Government, shall inspect the sample to insure that it conforms to all the requirements of the contract and submit a record of this inspection with the sample, including certificates of conformance for materials.

4.2.2 Contractor testing.- When the contractor is responsible for conducting first article approval tests, the sample shall be inspected by the contractor for all the requirements of the contract. The sample and a record of this inspection, including certificates of conformance for materials, shall be submitted to the Government for approval. The Government reserves the right to witness the contractor's inspection.

4.3 Inspection provisions.

4.3.1 Submission of product.- Unless otherwise specified by the contracting officer, inspection lot size, lot formation and presentation of lots shall be in accordance with "Submission of Product" provisions of MIL-STD-105.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T00:23Z
Check the source to verify that this is the current version before use.

4.3.2 Examination and tests.- Components and subassemblies shall be inspected in accordance with the inspection provisions contained in MIL-F-13926. Examinations and tests related to Section 3 herein shall be performed on a single defect (individual characteristic) basis in accordance with MIL-STD-105, and the sampling plan specified in Table I. The tabulated classification of defects shall constitute the minimum inspection to be performed by the supplier prior to Government acceptance or rejection by lot.

TABLE I - CLASSIFICATION OF DEFECTS

CLASS	REQUIREMENT	TEST PROCEDURE
CRITICAL: NONE		
MAJOR: AQL 1.0% DEFECTIVE		
101. Operability of moving parts	3.2.2	4.6.2
102. Interface requirements	3.3	4.6.5
103. Stitching	3.4	4.6.6
MINOR: NONE		

4.3.3 Acceptance and rejection.- Rejected lots shall be screened for all defective characteristics. Removal or correction of defective units and resubmittance of rejected lots shall be in accordance with "Acceptance and Rejection" as specified in MIL-STD-105.

4.4 Special sampling.

4.4.1 General.- Two sample containers shall be selected at random as a special sampling from each lot produced. The samples shall have successfully met all other acceptance tests specified herein, and shall then meet the following requirements and tests.

TABLE II

	REQUIREMENT	TEST PROCEDURE
301. Fabrication	3.1	Applicable drawings
302. Workmanship	3.5	4.6.7

4.4.2 Environmental and functional.- Two sample containers shall be selected at random as a sample from each lot produced. The samples shall have successfully met all other acceptance tests specified herein, and shall then meet the following requirements and tests.

TABLE III

	REQUIREMENT	TEST PROCEDURE
303. Storage temperature	3.1	4.6.1
304. Suspended drop	3.2.3.1	4.6.3
305. Free drop	3.2.3.2	4.6.4

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T00:23Z
Check the source to verify that this is the current version before use.

4.4.3 Failure of sample.- Should any one item of a special sampling fail to meet the specified test requirements, acceptance of the product will be suspended by the Government until necessary corrections have been made by the contractor and the resubmitted samples have been approved, (see 4.3.3).

4.5 Inspection equipment.- Except as otherwise provided for by the contract, the contractor shall supply and maintain inspection equipment in accordance with the applicable requirements of MIL-I-45607.

4.5.1 Government furnished inspection equipment.- Where the contract provides for Government furnished test equipment, supply and maintenance of test equipment shall be in accordance with the applicable requirements specified in MIL-I-45607.

4.5.2 Contractor furnished inspection equipment.

4.5.2.1 Government design.- Unless otherwise specified in the contract, all inspection equipment specified by drawing number in specifications or SQAP forming a part of the contract shall be supplied by the contractor in accordance with technical data listed in the List of Inspection Documents (IEL), when provided with the Technical Data Package (TDP).

4.5.2.2 Contractor design.- The contractor shall design and supply inspection equipment compatible with the "Test Methods and Procedures" specified in 4.6 of this specification and with the component inspection procedures specified in "Examination" and "Test Facilities" requirements of MIL-F-13926. Since tolerance of test equipment is normally considered to be within 10% of the product tolerance for which it is intended, this inherent error in the test equipment design must be considered as part of the prescribed product tolerance limit. Thus, concept, construction, materials, dimensions and tolerances used in the design of test equipment shall be so selected and controlled as to insure that the test equipment will reliably indicate acceptability of a product which does not exceed 90% of the prescribed tolerance limit, and permit positive rejection when non-conforming. Construction shall be such as to facilitate routine calibration of test equipment.

4.5.2.3 Simulated loads.- The configuration of the simulated loads specified in 3.2 shall be representative in size and overall weight of the contents, and have surfaces interfacing with the cases and conforming to the intended contents. For simulated loads for Carrying Case 10541026 see Figures 1 and 2. For simulated loads for Carrying Case 10541038 see Figure 3.

4.6 Test methods and procedures.

4.6.1 Environmental.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T00:23Z
Check the source to verify that this is the current version before use.

4.6.1.1 Storage.- The container assembly with dummy load shall be tested as follows:

(a) Elevated temperature.- The container assembly shall be placed in test chamber and the temperature elevated gradually to 150°F and allowed to remain at this temperature until thermo-stabilization is reached within the container. The test sample shall remain at the thermo-stabilized temperature of 160°F for a period of 4 hours, after which the temperature shall be gradually reduced to ambient. There shall be no evidence of cracks, delamination or distortion as a result of the test.

(b) Low temperature.- The container assembly shall be placed in test chamber and the temperature lowered gradually to -65°F and allowed to remain at this temperature until thermo-stabilization is reached within the container. The test sample shall remain at the thermo-stabilized temperature of -65°F for a period of 4 hours, after which the temperature shall be gradually raised to ambient. There shall be no evidence of cracks, delamination or distortion as a result of the test. After each of the above tests the case shall meet the requirements of 3.2.1 and 3.3.

4.6.2 Operability of movable parts.- With a simulated load specified in 4.5.2.1 positioned within the case, perform a visual and tactile examination to determine that all movable parts function without interference as specified in 3.2.2, when the case with contents is thermally stabilized at the temperatures specified in 3.2.2.

4.6.3 Suspended drop.- With the simulated load specified in 4.5.2.1 positioned within the case, adjust the shoulder strap to its longest length. Suspend the case by the strap from a fixed point in such a manner that the case remains suspended in a level plane. Raise the case to directly underneath the suspension point. Release the case to permit the case to fall to its original suspended height. Repeat this test twice and then perform a visual examination to determine compliance with 3.2.3.1.

4.6.4 Free drop.- With the simulated load specified in 4.5.2.1 positioned within the case drop the closed case with contents twice onto a wood floor from a height of 36 inches. One drop shall be on the edge of the cover; the second drop shall be on the bottom edge of the case. Subsequent to the two drops, the case shall meet the requirements of 3.2.3.2.

4.6.5 Interface requirements.- Carrying cases shall support representative configurations of intended contents specified in 4.5.2.1 at contacting interfaces. Simulated shelf mount base and legs (see Figure 2) shall be secured in Carrying Case 10541026 by the straps attached to the interior. Covers shall close over contents and fasteners zippered closed.

4.6.6 Stitching.- A visual examination to determine that each sequence of stitches is backstitched as specified in 3.4.

4.6.7 Workmanship.- Perform a visual and tactile examination to determine that the stitching and strap material conforms to the requirements specified in 3.5.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T00:23Z
Check the source to verify that this is the current version before use.

5. PREPARATION FOR DELIVERY

5.1 Packaging, packing, and marking.- Packaging, packing, and marking shall be in accordance with Packaging Data Sheet 10541026 for Carrying Case 10541026 and Packaging Data Sheet 10541038 for Carrying Case 10541038. The level of protection shall be as specified in the procurement document.

6. NOTES

6.1 Intended use.- The cases provide limited protection for the Range Finder Laser, AN/GVS-3 and its portable accessory equipment. Carrying Case 10541038 is used for the transceiver. Carrying Case 10541026 is used for the accessory equipment which includes a tripod, adapter mount with cable, battery pack, and shelf mount.

6.2 Ordering data.- Procurement documents should specify:

a. Title, date, and number of this specification.
b. Order of document precedence.
c. Applicable packaging data sheet number.
d. Selection of applicable levels of preservation, and packing.
e. Provisions for First Article testing.

Custodian:


Army - MU

Preparing activity:

Army - MU

Project No. 1240-A220

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T00:23Z
Check the source to verify that this is the current version before use.

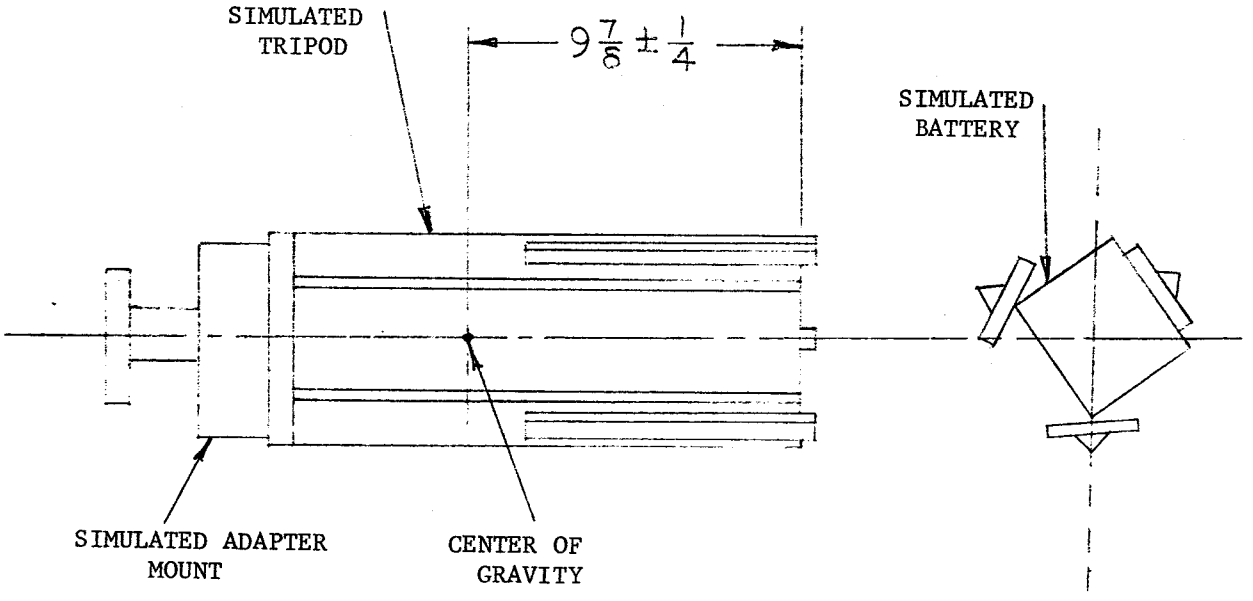


NOTES:

1. Refer to Assembly Drawings F10541111 and F10541078, and drawings pertaining thereto, for all other necessary dimensions.
2. Weight 10 1/2 lbs ± 1/4 lb.

Simulated Adapter Mount, Tripod and Battery Load - One Required


FIGURE 1

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T00:23Z
Check the source to verify that this is the current version before use.

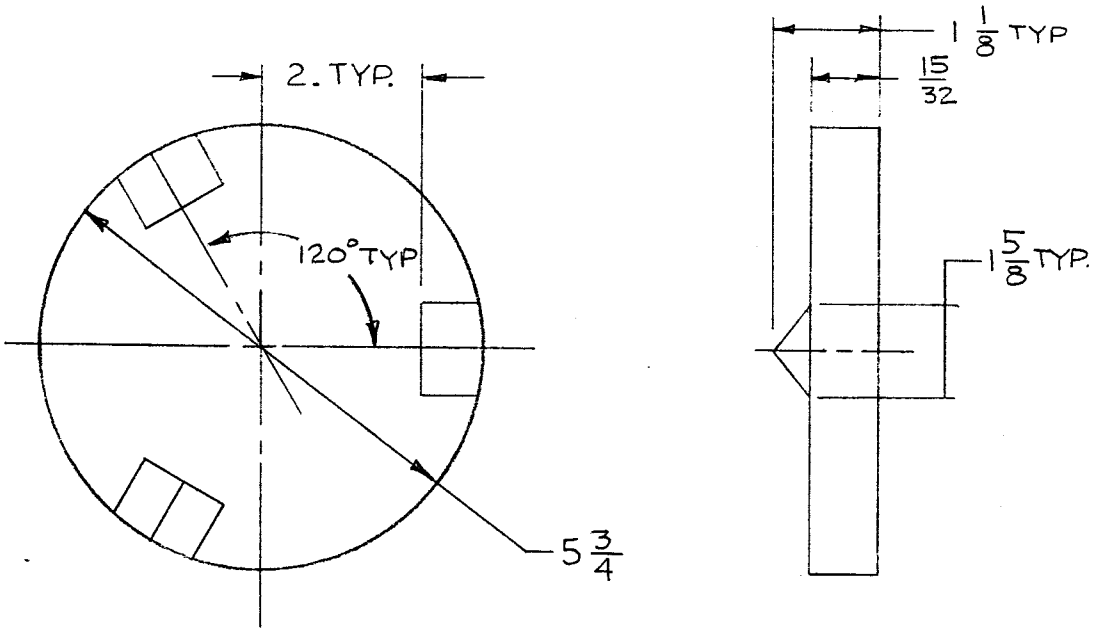

NOTE: Weight 1 lb ± 1/8 lb.

Simulated Shelf Mount Base Load - One Required

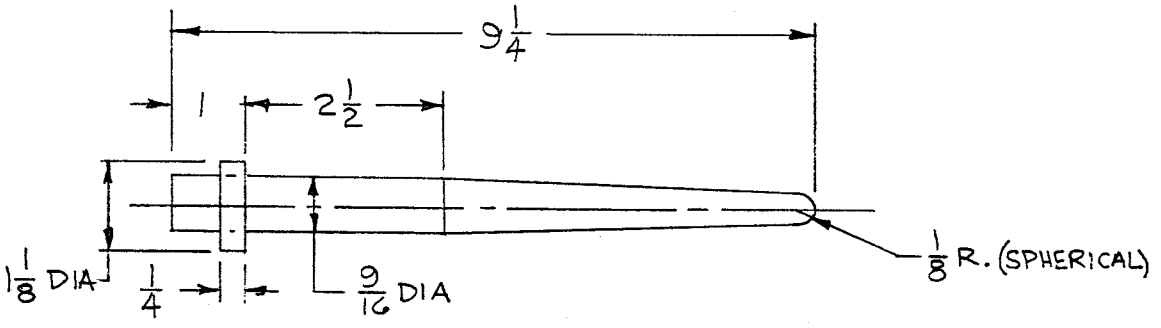


NOTE: Weight 8 oz ± 1 oz
(Total for three)

Simulated Shelf Mount Leg Load - Three Required

FIGURE 2

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T00:23Z
Check the source to verify that this is the current version before use.

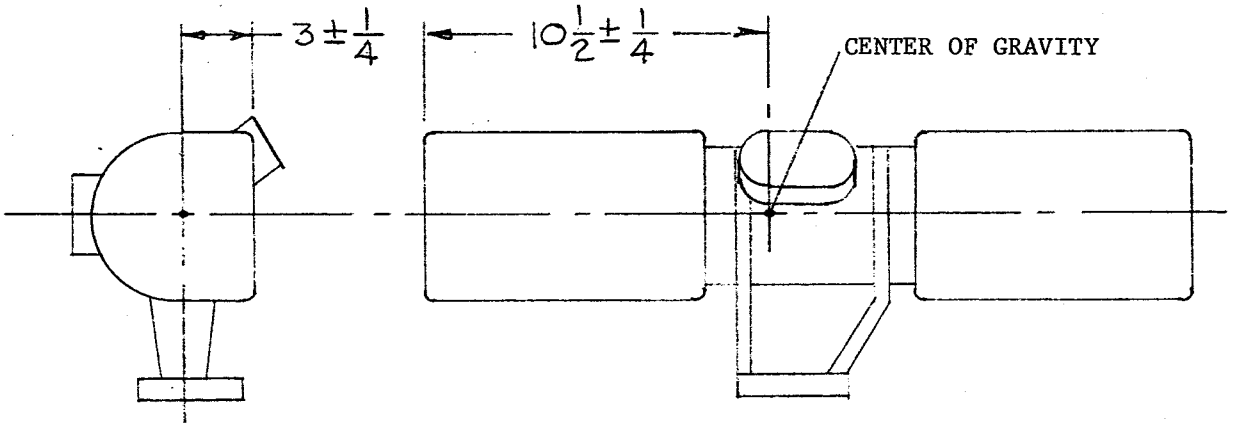

NOTES:

1. Refer to Assembly Drawing F10540501, and drawings pertaining thereto, for all other necessary dimensions.

2. Weight 19 1/2 lbs ± 1/4 lb.

Simulated Range Finder Load - One Required

FIGURE 3

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T00:23Z
Check the source to verify that this is the current version before use.

SPECIFICATION ANALYSIS SHEET

Form Approved
Budget Bureau No. 22-R255

INSTRUCTIONS: This sheet is to be filled out by personnel, either Government or contractor, involved in the use of the specification in procurement of products for ultimate use by the Department of Defense. This sheet is provided for obtaining information on the use of this specification which will insure that suitable products can be procured with a minimum amount of delay and at the least cost. Comments and the return of this form will be appreciated. Fold on lines on reverse side, staple in corner, and send to preparing activity. Comments and suggestions submitted on this form do not constitute or imply authorization to waive any portion of the referenced document(s) or serve to amend contractual requirements.

SPECIFICATION

ORGANIZATION

CITY AND STATE

CONTRACT NUMBER

MATERIAL PROCURED UNDER A

☐ DIRECT GOVERNMENT CONTRACT ☐ SUBCONTRACT

1. HAS ANY PART OF THE SPECIFICATION CREATED PROBLEMS OR REQUIRED INTERPRETATION IN PROCUREMENT USE?

A. GIVE PARAGRAPH NUMBER AND WORDING.

B. RECOMMENDATIONS FOR CORRECTING THE DEFICIENCIES

2. COMMENTS ON ANY SPECIFICATION REQUIREMENT CONSIDERED TOO RIGID

3. IS THE SPECIFICATION RESTRICTIVE?

☐ YES ☐ NO *(If "yes", in what way?)*

4. REMARKS *(Attach any pertinent data which may be of use in improving this specification. If there are additional papers, attach to form and place both in an envelope addressed to preparing activity)*

SUBMITTED BY *(Printed or typed name and activity - Optional)*

DATE

DD FORM 1 JAN 66 1426 REPLACES EDITION OF 1 OCT 64 WHICH MAY BE USED.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T00:23Z
Check the source to verify that this is the current version before use.