MILITARY SPECIFICATION SHEET

ENCLOSURES-PLASTIC, SUBMERISIBLE, (15-FOOT)

3 AND 4 - INCHES ROUND, GROUNDED

This specification sheet is approved for use by the Naval Sea Systems Command and is available for use by all Departments and Agencies of the Department of Defense.

The complete requirements for procuring the enclosure described herein shall consist of this document and the latest issue of MIL-E-24142.

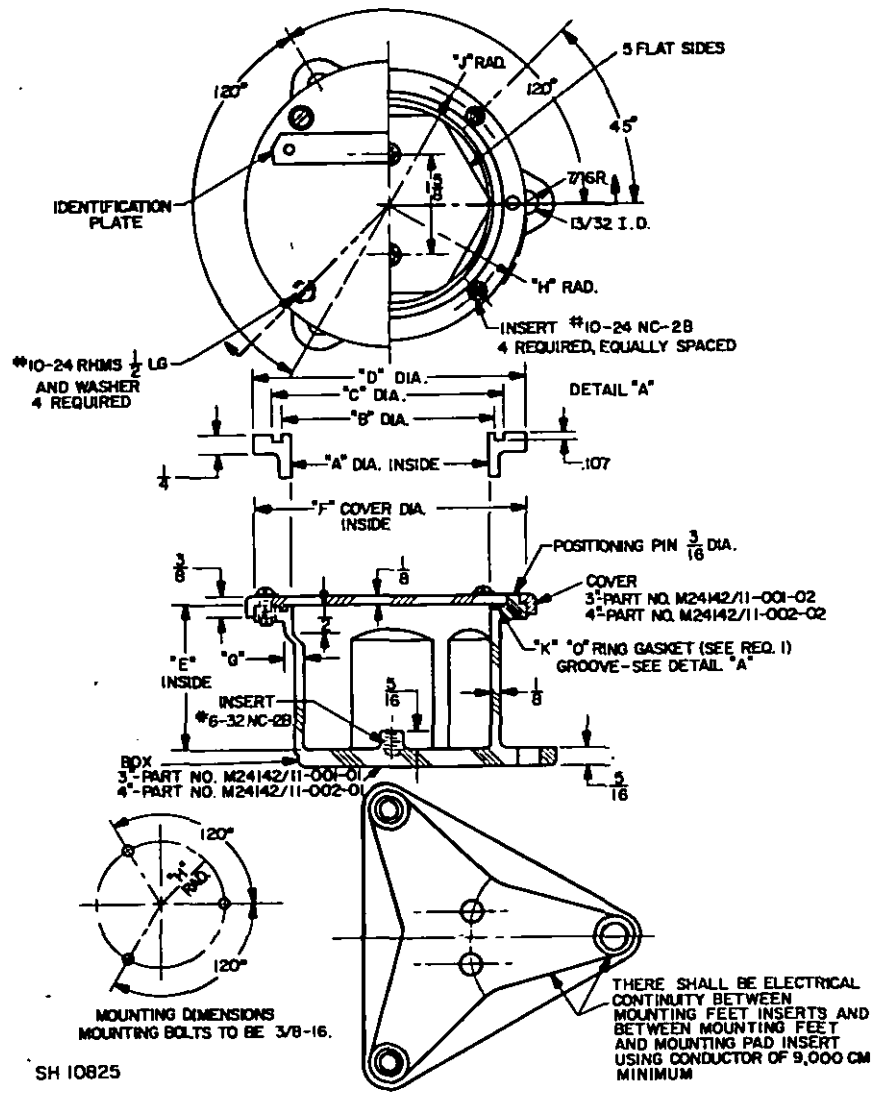


Figure 1


FSC 5975

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T19:35Z
Check the source to verify that this is the current version before use.

NOTES:
1. All dimensions are in inches.
2. Unless otherwise specified, tolerances are ±1/64 inch for fractions and ±0.005 for decimals.
3. Angular tolerance ±1/2 degrees.

Military part number	Size	Dimensions									R "O" ring gasket
		A	B	C	D	E	F	G	H	J	
M24142/11-001	3	3.250	3.406	3.687	4.437	2-7/16	4-1/2	5/32	2-1/4 R	2-1/32 R	ARP568-237
M24142/11-002	4	4.250	4.406	4.687	5.500	3	5-9/16	7/32	2-13/16 R	2-9/16 R	ARP568-245

REQUIREMENTS:
1. "O" ring gasket: In accordance with MIL-P-5516, class B. Durometer 65 + 5.
2. Optional square gaskets may be substituted for "O" ring gaskets for plastic boxes.
3. Material for M24142/11-001 and 002 shall be molded plastic type MA1-60 in accordance with MIL-M-14.
4. Path between, (a) each of the mounting pads inserts and (b) between each mounting pad and each mounting foot insert, measured as shown in figure 2, shall not exceed 0.05 ohm.
5. Intended use: Alternates to 3- and 4-inch enclosures of MIL-E-24142/5 for grounded applications.

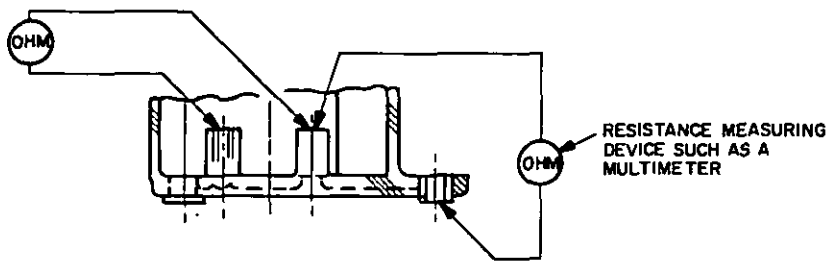

SH 10896

Figure 2

Intended Use: Alternate to 3-inch enclosure of MIL-E-24142/5.

Preparing activity:
Navy - SH
(Project 5975-N476)

☆ U. S. GOVERNMENT PRINTING OFFICE: 1975-603-744/999

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T19:35Z
Check the source to verify that this is the current version before use.