MILITARY SPECIFICATION SHEET

ENCLOSURE, WITH FUSE COVER, SIZES 10 BY 10 THROUGH 12 BY 12, TOTALLY ENCLOSED, NONWATERTIGHT

(A)


This specification sheet is approved for use by the Naval Sea Systems Command, Department of the Navy, and is available for use by all Departments and Agencies of the Department of Defense.

The complete requirements for acquiring the enclosure described herein shall consist of this document and the latest issue of MIL-E-24142.

(A) denotes changes.

FSC 5975

Source: https://assist.dla.mil -- Downloaded: 202610-19T19:35Z
Check the source to verify that this is the current version before use.

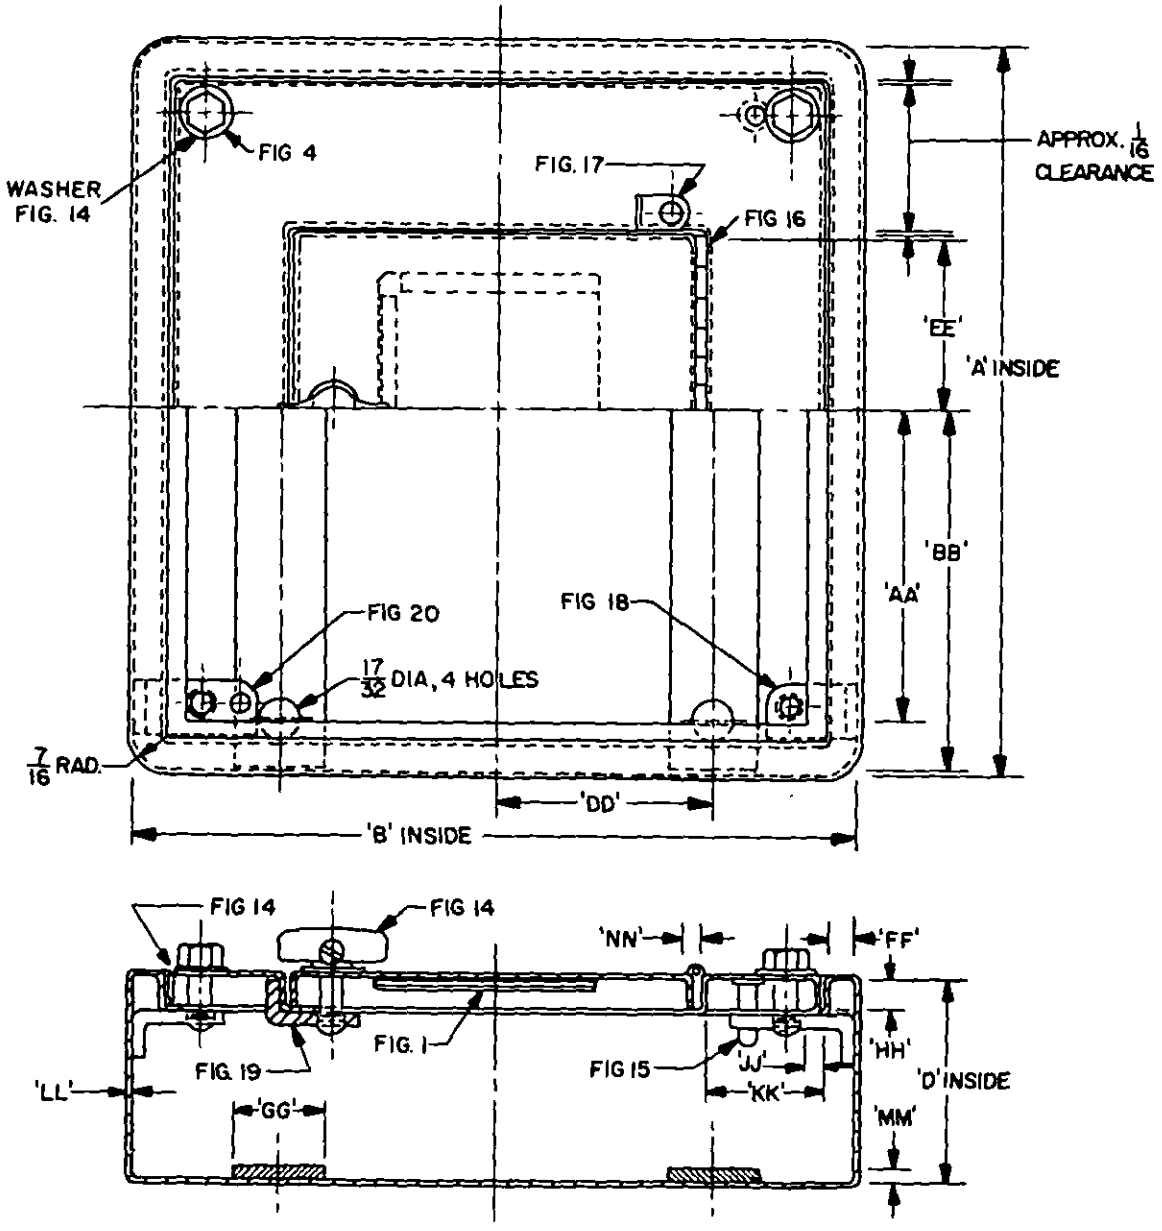

SH10831A

NOTES:

1. Dimensions are in inches.
2. Unless otherwise specified, tolerances are plus or minus 1/64 inch for fractions and plus or minus 0.005 for decimals.
3. Door latching device (see figure 17) may be excluded for optional application.
4. Ⓐ Figures cited above are contained in the basic MIL-E-24142.

FIGURE 1. Dimensions and configuration.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T19:35Z
Check the source to verify that this is the current version before use.

TABLE I. Parts.

Military part no.	Size	Dimensions															
		A	B	C	AA	BB	CC	DD	EE	FF	GG	HH	JJ	KK	LL	MM	NN	PP
M24142/12-001	10 by 10	10	10	3-1/2	4-1/2	4-15/16	—	3	2-3/8	3/8	1-1/4	7/16	1/4	*	0.062	3/16	1/4	—
M24142/12-002	10 by 12	12	10	3-1/2	5-1/4	5-15/16	—	3	2-3/8	3/8	1-1/4	7/16	1/4	*	0.062	3/16	1/4	—
M24142/12-003	12 by 12	12	12	3-1/2	5-1/4	4-7/16	—	3	2-3/8	3/8	1-1/4	7/16	1/4	*	0.062	3/16	1/4	—

* Length to suit

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T19:35Z
Check the source to verify that this is the current version before use.

REQUIREMENTS:

1. Material shall be sheet metal, steel.
2. Sheet metal shall:
   (A) (a) Conform to ASTM A 366 and ASTM A 569.
   (b) Be 0.062 minimum inch thick.
3. (A) Holes in cover shall be:
   (a) Drilled 5/16 diameter for figure 4.
   (b) Tapped 3/8 - 16, UNC-2B for captive cover bolts and thumb screws.
   (c) Drilled 21/64 diameter for figure 14.
   (d) Drilled 17/64 diameter for figure 15.
4. Thumb screws required, one.
5. Cover bolts required, four.
6. Alinement dowels required, two.
7. Latch for holding hinge fuse cover, required, one (see figure 17).

TABLE II. Superseding data.

Superseded dwg. 9000-S6202-	Enclosure size	Specification MIL-E-24142	Remarks
73393	10 by 10	M24142/15-001	Fuse cover
73394	10 by 12	M24142/15-002	Fuse cover
73401	12 by 12	M24142/15-003	Fuse cover

Preparing activity:
Navy - SH
(Project 5975-N571-12)

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T19:35Z
Check the source to verify that this is the current version before use.