MIL-E-24142/17A(SH)
25 January 1984
SUPERSEDING
MIL-E-24142/17(SHIPS)
31 July 1975

MILITARY SPECIFICATION SHEET

ENCLOSURE WITH FUSE COVER, SIZES 10 BY 14 THROUGH 12 BY 20, TOTALLY ENCLOSED, NONWATERTIGHT

(A)


This specification sheet is approved for use by the Naval Sea Systems Command, Department of the Navy, and is available for use by all Departments and Agencies of the Department of Defense.

The complete requirements for acquiring the enclosure described herein shall consist of this document and the latest issue of MIL-E-24142.

(A) denotes changes.

FSC 5975

Source: https://assist.dla.mil -- Downloaded: 202610-19T19:35Z
Check the source to verify that this is the current version before use.

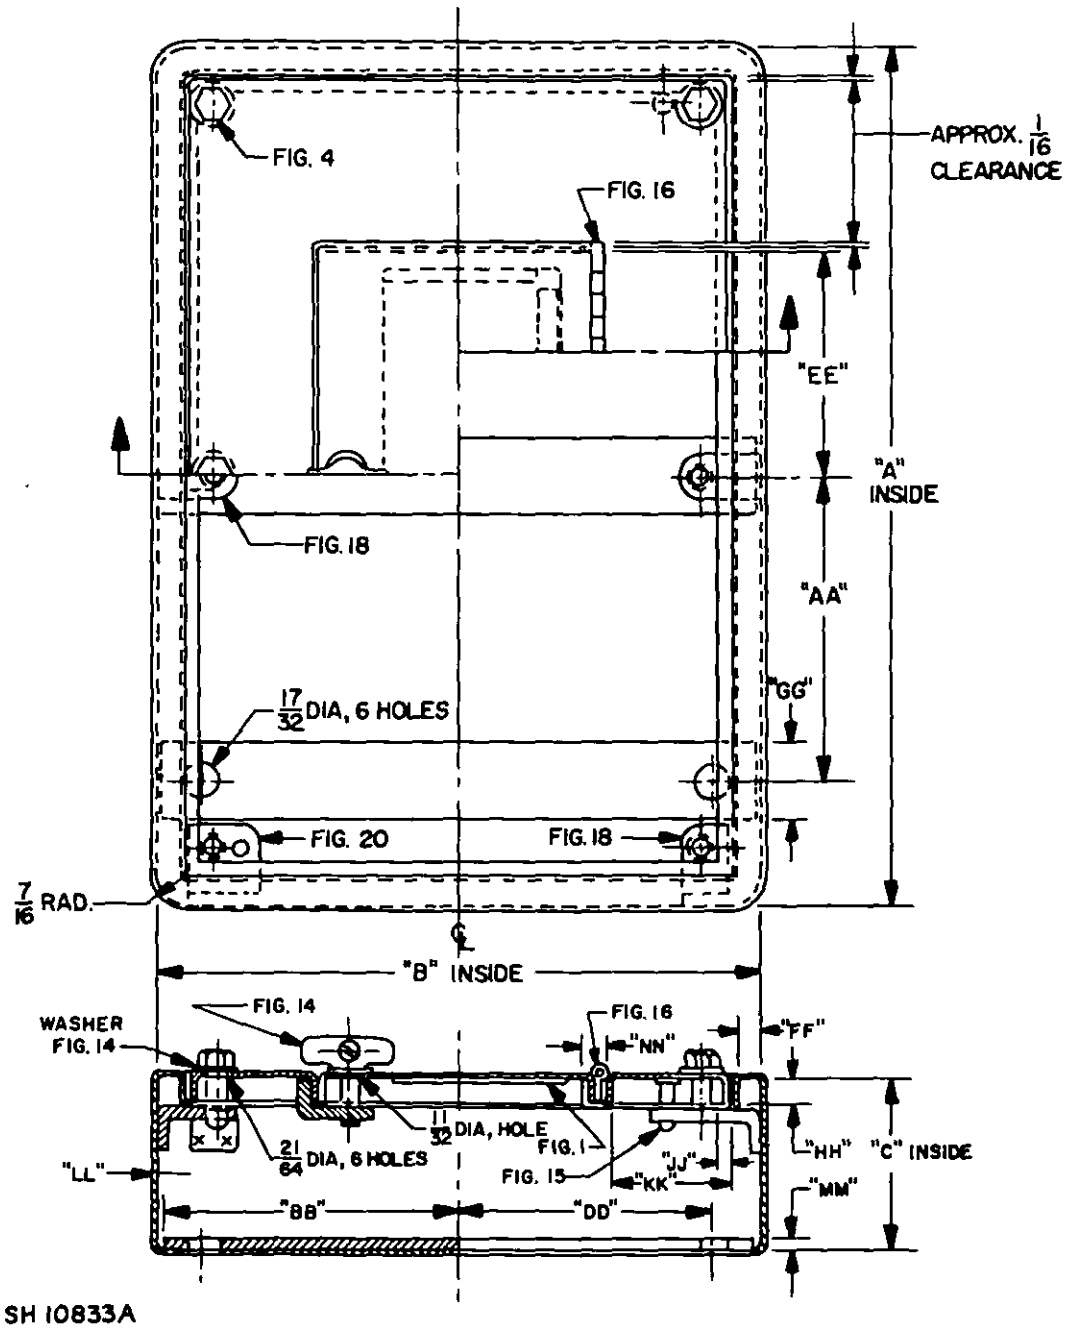

Notes:

1. Dimensions are in inches.
2. Unless otherwise specified, tolerances are plus or minus 1/64 inch for fractions and plus or minus 0.005 for decimals.
3. Door latching device (see figure 17) may be excluded for optional applications.
4. (A) Figures cited above are contained in the basic MIL-E-24142.

FIGURE 1. Dimensions and configuration.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T19:35Z
Check the source to verify that this is the current version before use.

TABLE I. Parts.

Military part no.	Size	Dimensions															
		A	B	C	AA	BB	CC	DD	EE	FF	GG	HH	JJ	KK	LL	MM	NN	PP
M24142/17-001	10 by 14	14	10	3	5	4-15/16	—	4-1/4	2-3/8	3/8	1-1/4	27/64	1/4	*	0.078	3/16	1/4	—
M24142/17-002	10 by 16	16	10	3-1/2	6-1/2	4-15/16	—	4-1/4	2-3/8	3/8	1-1/4	27/64	1/4	*	0.078	3/16	1/4	—
M24142/17-003	10 by 18	18	10	3-1/2	6-1/2	4-15/16	—	4-1/4	2-3/8	3/8	1-1/4	27/64	1/4	*	0.078	3/16	1/4	—
M24142/17-004	12 by 14	14	12	4	5-1/2	5-15/16	—	5-1/4	2-3/8	3/8	1-1/4	27/64	1/4	*	0.078	3/16	1/4	—
M24142/17-005	12 by 16	16	12	4	6-1/2	5-15/16	—	5-1/4	2-3/8	3/8	1-1/4	27/64	1/4	*	0.078	3/16	1/4	—
M24142/17-006	12 by 18	18	12	4	7	5-15/16	—	5-1/4	2-3/8	3/8	1-1/4	27/64	1/4	*	0.078	3/16	1/4	—
M24142/17-007	12 by 20	20	12	4	8	5-15/16	—	5-1/4	2-3/8	3/8	1-1/4	27/64	1/4	*	0.078	3/16	1/4	—

* Length to suit

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T19:35Z
Check the source to verify that this is the current version before use.

REQUIREMENTS:

1. Material shall be sheet metal, steel.
2. Sheet metal shall:
   (A) (a) Conform to ASTM A 366 and ASTM A 569.
   (b) Be 0.078 inch.
3. Holes in cover shall be:
   (a) Drilled 5/16 diameter for figure 4.
   (b) Tapped 3/8-16, UNC-2B for captive cover bolts and thumb screw.
   (c) Drilled 21/64 diameter for figure 14.
   (d) Drilled 17/64 diameter for figure 15.
4. Thumb screws required, one.
5. Cover bolts required, six.
6. Alinement dowels required, two.
7. Latch for holding hinged fuse cover, required, one (see figure 17).

TABLE II. Superseding data.

Superseded dwg. 9000-S6202-	Enclosure size	Specification MIL-E-24142	Remarks
73395	10 by 14	M24142/17-001	Fuse cover
73396	10 by 16	M24142/17-002	Fuse cover
73397	10 by 18	M24142/17-003	Fuse cover
73402	12 by 14	M24142/17-004	Fuse cover
73403	12 by 16	M24142/17-005	Fuse cover
73404	12 by 18	M24142/17-006	Fuse cover
73405	12 by 20	M24142/17-007	Fuse cover

Preparing activity:
Navy - SH
(Project 5975-N571-14)

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T19:35Z
Check the source to verify that this is the current version before use.