MIL-E-24142/18A(SH)
25 January 1984
SUPERSEDING
MIL-E-24142/18(SHIPS)
31 July 1975

MILITARY SPECIFICATION SHEET

ENCLOSURES, SINGLE COVER, SIZES 10 BY 20 THROUGH 18 BY 22, TOTALLY ENCLOSED, NONWATERTIGHT

Ⓐ


This specification sheet is approved for use by the Naval Sea Systems Command, Department of the Navy, and is available for use by all Departments and Agencies of the Department of Defense.

The complete requirements for acquiring the enclosure described herein shall consist of this document and the latest issue of MIL-E-24142.

Ⓐ denotes changes.

FSC 5975

Source: https://assist.dla.mil -- Downloaded: 20261O-19T19:36Z
Check the source to verify that this is the current version before use.

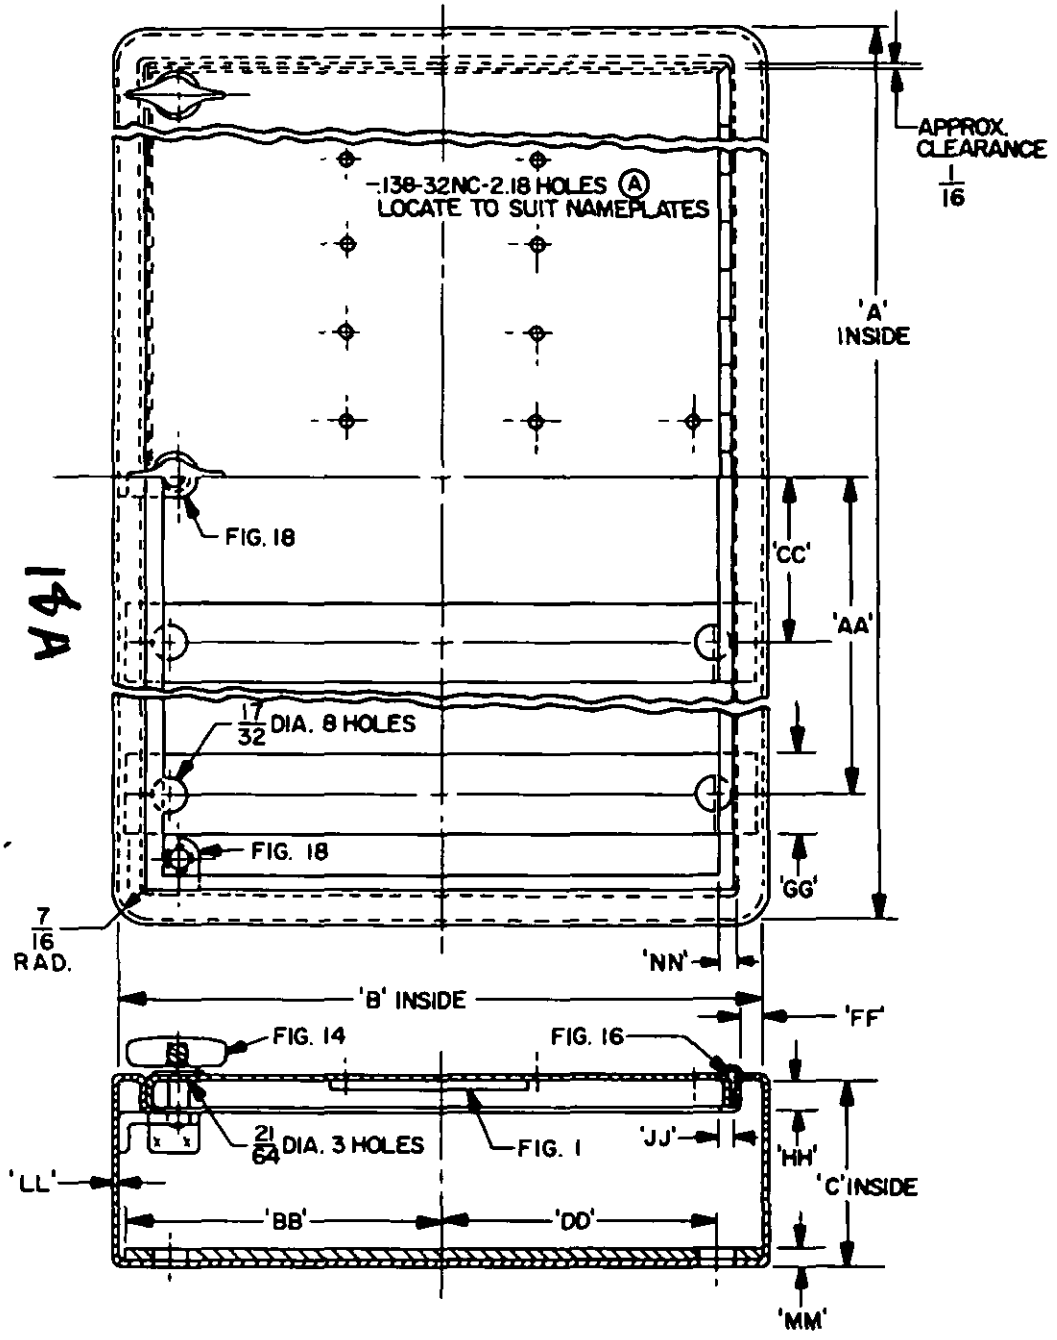

SH 10834 A

NOTES:

1. Dimensions are in inches.
2. Unless otherwise specified, tolerances are plus or minus 1/64 inch for fractions and plus or minus 0.005 for decimals.
3. (A) Figures cited above are contained in the basic MIL-E-24142.

FIGURE 1. Dimensions and configuration.

Source: https://assist.dla.mil -- Downloaded: 202610-19T19:36Z
Check the source to verify that this is the current version before use.

TABLE I. Parts.

Military part no.	Size	Dimensions															
		A	B	C	AA	BB	CC	DD	EE	FF	GG	HH	JJ	KK	LL	MM	NN	PP
M24142/18-001	10 by 20	20	10	4	8	4-15/16	3	4-1/4	—	3/8	1-1/4	27/64	1/4	—	0.078	3/16	—	—
M24142/18-002	10 by 22	22	10	3-1/2	9	4-15/16	3	4-1/4	—	3/8	1-1/4	27/64	1/4	—	0.078	3/16	—	—
M24142/18-003	10 by 24	24	10	4	10-1/8	4-15/16	3-3/8	4-1/4	—	3/8	1-1/4	27/64	1/4	—	0.078	3/16	—	—
M24142/18-004	12 by 22	22	12	4	9	5-15/16	3	5-1/4	—	3/8	1-1/4	27/64	1/4	—	0.078	3/16	—	—
M24142/18-005	14 by 22	22	14	4	9	6-15/16	3	6-1/4	—	3/8	1-1/4	27/64	1/4	—	0.078	3/16	—	—
M24142/18-006	14 by 24	14	24	4	10-1/8	6-15/16	3-3/8	6-1/4	—	3/8	1-1/4	27/64	1/4	—	0.078	3/16	—	—
M24142/18-007	18 by 22	22	18	4	9	8-15/16	3	8-7/8	—	3/8	1-1/4	27/64	1/4	—	0.078	3/16	—	—

Source: https://assist.dla.mil -- Downloaded: 202610-19T19:36Z
Check the source to verify that this is the current version before use.

REQUIREMENTS:

1. Material shall be sheet metal; steel.
2. Sheet metal shall:
   (A) (a) Conform to ASTM A 366 and ASTM A 569.
   (b) Be 0.078 inch thick.
3. Holes in cover shall be:
   (a) Drilled 5/16 diameter for figure 4.
   (b) Tapped 3/8-16, UNC-2B for captive thumb screws.
   (c) Drilled 21/64 diameter for figure 14.
   (d) Drilled 17/64 diameter for figure 15.
4. Thumb screws required, three.
5. Hinged enclosure cover holding device required, one (see figure 21).

TABLE II. Superseding data.

Superseded dwg. 9000-S6202-	Enclosure size	Specification MIL-E-24142	Remarks
73398	10 by 20	M24142/18-001	Single cover
73399	10 by 22	M24142/18-002	Single cover
73400	10 by 24	M24142/18-003	Single cover
73406	12 by 22	M24142/18-004	Single cover
73411	14 by 22	M24142/18-005	Single cover
73412	14 by 24	M24142/18-006	Single cover
73413	18 by 22	M24142/18-007	Single cover

Preparing activity:
Navy - SH
(Project 5975-N571-15)

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T19:36Z
Check the source to verify that this is the current version before use.