MILITARY SPECIFICATION SHEET

# ENCLOSURE, WITH FUSE COVER, SIZE 10 BY 20 THROUGH 12 BY 22, TOTALLY ENCLOSED, NONWATERTIGHT

(A)

This specification sheet is approved for use by the Naval Sea Systems Command, Department of the Navy, and is available for use by all Departments and Agencies of the Department of Defense.


The complete requirements for acquiring the enclosure described herein shall consist of this document and the latest issue of MIL-E-24142.

(A) denotes changes.

FSC 5975



Source: https://assist.dla.mil -- Downloaded: 202610-19T19:36Z
Check the source to verify that this is the current version before use.

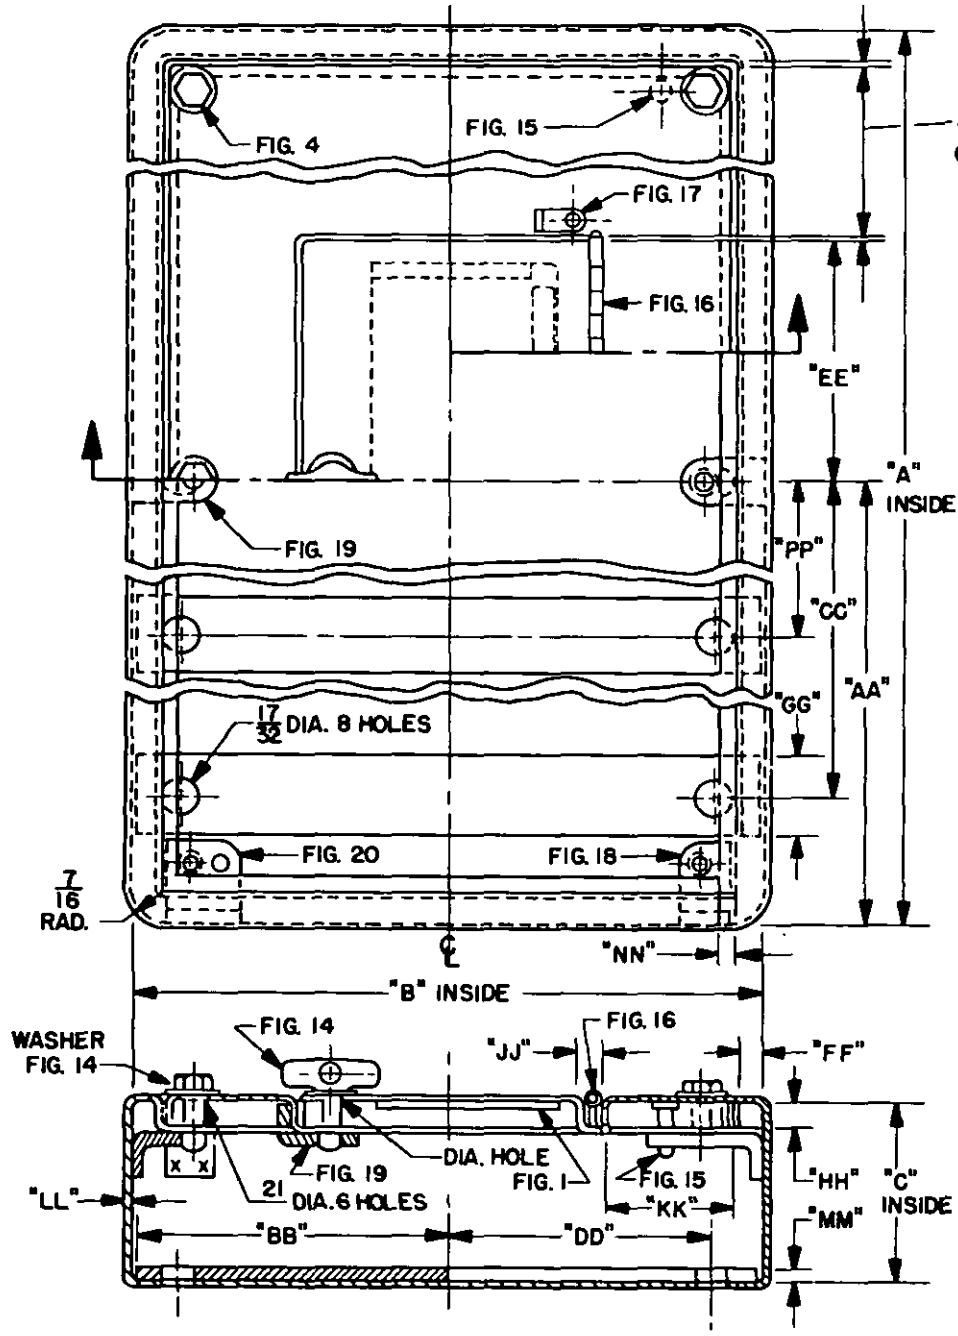


SH 10823 A

NOTES:

1. Dimensions are in inches.
2. Unless otherwise specified, tolerances are plus or minus 1/64 inch for fractions and plus or minus 0.005 for decimals.
3. Door latching device (see figure 17) may be excluded for optional applications.
4. Figures cited above are contained in the basic MIL-E-24142.

(A)

FIGURE 1. Dimensions and configuration.



Source: https://assist.dla.mil -- Downloaded: 2026-10-19T19:36Z
Check the source to verify that this is the current version before use.

TABLE I. Parts.

| Military part no. | Size | Dimensions | | | | | | | | | | | | | | | |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| | | A | B | C | AA | BB | CC | DD | EE | FF | GG | HH | JJ | KK | LL | MM | NN | PP |
| M24142/19-001 | 10 by 20 | 20 | 10 | 4 | 10 | 4-15/16 | 8 | 4-1/4 | 2-3/8 | 3/8 | 1-1/4 | 27/64 | 1/4 | * | 0.078 | 3/16 | 1/4 | 3 |
| M24142/19-002 | 10 by 22 | 22 | 10 | 4 | 11 | 4-15/16 | 9 | 4-1/4 | 2-3/8 | 3/8 | 1-1/4 | 27/64 | 1/4 | * | 0.078 | 3/16 | 1/4 | 3 |
| M24142/19-003 | 10 by 24 | 24 | 10 | 4 | 12 | 4-15/16 | 10-3/8 | 4-1/4 | 2-3/8 | 3/8 | 1-1/4 | 27/64 | 1/4 | * | 0.078 | 3/16 | 1/4 | 3-3/8 |
| M24142/19-004 | 12 by 22 | 22 | 12 | 4 | 11 | 4-15/16 | 9 | 5-1/4 | 2-3/8 | 3/8 | 1-1/4 | 27/64 | 1/4 | * | 0.078 | 3/16 | 1/4 | 3 |

* Length to suit





Source: https://assist.dla.mil -- Downloaded: 2026-10-19T19:36Z
Check the source to verify that this is the current version before use.

REQUIREMENTS:

1. Material shall be sheet metal, steel.
2. Sheet metal shall:
   (A) (a) Conform to ASTM A 366 and ASTM A 569.
   (b) Be 0.078 inch thick.
3. Holes in cover shall be:
   (a) Drilled 5/16 diameter for figure 4.
   (b) Tapped 3/8-16, NC-2 for captive cover bolts and thumb screws.
   (c) Drilled 21/64 diameter for figure 14.
   (d) Drilled 17/64 diameter for figure 15.
4. Thumb screws required, one.
5. Cover bolts required, six.
6. Alinement dowels required, two,
7. Latch for holding hinged fuse cover required, one (see figure 17).

TABLE II. Superseding data.

| Superseded dwg. 9000-S6202- | Enclosure size | Specification MIL-E-24142 | Remarks |
|---|---|---|---|
| 73398 | 10 by 20 | M24142/19-001 | Fuse cover |
| 73399 | 10 by 22 | M24142/19-002 | Fuse cover |
| 73400 | 10 by 24 | M24142/19-003 | Fuse cover |
| 73406 | 12 by 22 | M24142/19-004 | Fuse cover |

Preparing activity:
Navy - SH
(Project 5975-N571-16)

* U.S. GOVERNMENT PRINTING OFFICE: 1984—705—040/A1121



Source: https://assist.dla.mil -- Downloaded: 2026-10-19T19:36Z
Check the source to verify that this is the current version before use.