MIL-E-24142/20A(SH)
25 January 1984
SUPERSEDING
MIL-E-24142/20(SHIPS)
31 July 1975

MILITARY SPECIFICATION SHEET

(A) ENCLOSURES, WITH FUSE COVER, SIZE 10 BY 20, THROUGH 12 BY 22, TOTALLY ENCLOSED, NONWATERTIGHT


This specification sheet is approved for use by the Naval Sea Systems Command, Department of the Navy, and is available for use by all Departments and Agencies of the Department of Defense.

The complete requirements for acquiring the enclosure described herein shall consist of this document and the latest issue of MIL-E-24142.

(A) denotes changes.

FSC 5975

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T19:36Z
Check the source to verify that this is the current version before use.

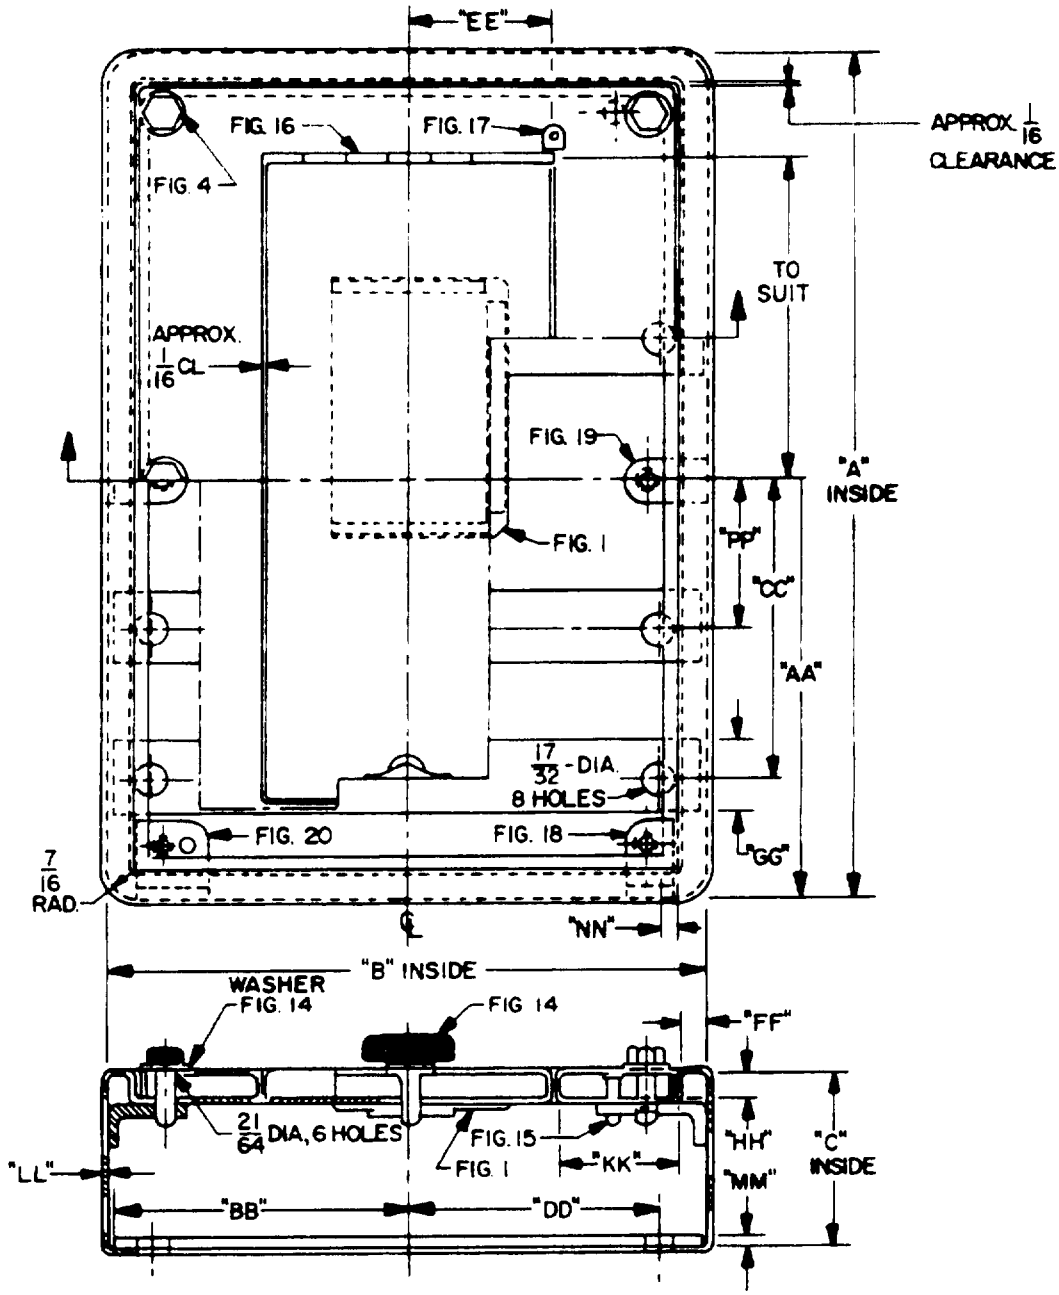

SH10824A

NOTES:

1. Dimensions are in inches.
2. Unless otherwise specified, tolerances are plus or minus 1/64 inch for fractions and plus or minus 0.005 for decimals.
3. Door latching device (see figure 17) may be excluded for optional applications.
4. (A) The figures referenced herein are covered in MIL-E-24142.

FIGURE 1. Dimensions and configuration.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T19:36Z
Check the source to verify that this is the current version before use.

TABLE I. Parts.

Military part no.	Size	A	B	C	AA	BB	CC	DD	EE	FF
M24142/20-001	10 x 20	20	10	4	10	4-15/16	8	4-1/4	*	3
M24142/20-002	10 x 22	22	10	4	11	4-15/16	9	4-1/4	*	3
M24142/20-003	10 x 24	24	10	4	12	4-15/16	10-3/8	4-1/4	*	3-3/8
M24142/20-004	12 x 22	22	10	4	11	5-15/16	9	5-1/4	*	3
(A) M24142/20-005	14 x 14	14	14	3	7	6-15/16	5-1/8	6-1/4	*	—
(A) M24142/20-006	14 x 18	18	14	3	9	6-15/16	8	6-1/4	*	—
(A) M24142/20-007	14 x 20	20	14	3	10	6-15/16	8	6-1/4	*	—

* Length to suit

REQUIREMENTS:

(A) 1. Material shall be carbon steel (0.078 inch thick).
2. Holes in cover shall be:
   (a) Drilled 5/16 diameter for figure 4.
   (b) Tapped .375 - 16, UNC-2B for captive cover bolts and thumb screws.
   (c) Drilled 21/64 diameter for figure 14.
   (d) Drilled 17/64 diameter for figure 15.
3. Thumb screws required, one.
4. Cover bolts required, six.
5. Alinement dowels required, two.
6. Latch for holding hinged fuse cover required, one (see figure 17).

TABLE II. Superseding data.

Superseded dwg. 9000-S6202-	Enclosure size	Superseded by Military part no. M24142/20-
73398	10 x 20	001
73399	10 x 22	002
73400	10 x 24	003
73406	12 x 22	004
(A) 73407	14 x 14	005
(A) 73410	14 x 18	006
(A) 73410	14 x 20	007

Preparing activity:
Navy - SH
(Project 5975-N571-17)

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T19:36Z
Check the source to verify that this is the current version before use.