MIL-C-17614F(NU)
14 AUG 1987
SUPERSEDING
MIL-C-17614E(NU)
3 February 1981

# MILITARY SPECIFICATION

## CAP, GARRISON, MAN'S

This specification is approved for use by the Navy Clothing and Textile Research Facility, Department of the Navy, and is available for use by all Departments and Agencies of the Department of Defense.

1. SCOPE

1.1 Scope. This specification covers the requirements for lined and unlined garrison caps.

1.2 Classification. The caps shall be procured in the following types, classes and sizes as specified (see 6.2):

1.2.1 Types.

Type I - Lined
Type II - Unlined

* 1.2.2 Classes.

| | |
|---|---|
| (Type I) | Class 1 - Wool Elastique, Green 2212 |
| | Class 2 - Polyester/Wool Tropical, Khaki 3729 |
| | Class 3 - Wool Gabardine, Khaki 2115 |
| | Class 4 - Polyester/Wool Serge, Blue 3362 |
| (Type II) | Class 5 - Polyester/Cotton Twill, Khaki 3729 |
| | Class 6 - Polyester/Cotton Twill, Blue 3362 |

1.2.3 Sizes.

6 1/2, 6 5/8, 6 3/4, 6 7/8, 7, 7 1/8, 7 1/4, 7 3/8, 7 1/2, 7 5/8
7 3/4, 7 7/8, 8

Beneficial comments (recommendations, additions, deletions) and any pertinent data which may be of use in improving this document should be addressed to: Officer in Charge, Navy Clothing and Textile Research Facility, 21 Strathmore Road, Natick, MA 01760-2490 by using the self-addressed Standardization Document Improvement Proposal (DD Form 1426) appearing at the end of this document or by letter.

AMSC N/A FSC 8405

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 202610-18T10:23Z
Check the source to verify that this is the current version before use.

2. APPLICABLE DOCUMENTS

* 2.1 Government documents.

* 2.1.1 Specifications, standards, and handbooks. The following specifications, standards, and handbooks form a part of this specification to the extent specified herein. Unless otherwise specified, the issues of these documents shall be those listed in the issue of the Department of Defense Index of Specifications and Standards (DODISS) and supplement thereto, cited in the solicitation.

SPECIFICATIONS

FEDERAL

| | |
|---|---|
| V-T-276 | - Thread, Cotton |
| NN-P-71 | - Pallet, Material Handling, Wood, Stringer Construction 2 Way and 4 Way (Partial) |
| DDD-L-20 | - Label; for Clothing, Equipage, and Tentage (General Use) |

MILITARY

| | |
|---|---|
| MIL-C-368 | - Cloth, Satin, Rayon and Cloth, Twill, Rayon |
| MIL-C-823 | - Cloth, Serge; Wool, Wool and Nylon, Polyester and Wool |
| MIL-S-3577 | - Sweatband, Headwear (Leather) |
| MIL-C-3738 | - Cloth, Elastique, Wool |
| MIL-C-10176 | - Cloth, Gabardine, Wool, Polyester and Wool |
| MIL-P-15011 | - Pallet, Material Handling, Wood, Post Construction, 4 Way Entry |
| MIL-B-17757 | - Boxes, Shipping, Fiberboard (Modular Sizes) |
| MIL-C-21115 | - Cloth, Tropical, Wool, Polyester/Wool |
| MIL-C-29127 | - Cloth, Twill, Polyester/Cotton (Crease-Resistant Finish) |
| MIL-T-43548 | - Thread, Polyester Core: Cotton-, Rayon- or Polyester-Covered |
| MIL-S-43993 | - Sweatband, Headwear, Artificial Leather |
| MIL-C-44121 | - Cloth, Twill, Polyester |

STANDARDS

FEDERAL

| | |
|---|---|
| FED-STD-751 | - Stitches, Seams, and Stitchings |

MILITARY

| | |
|---|---|
| MIL-STD-105 | - Sampling Procedures and Tables for Inspection by Attributes |
| MIL-STD-129 | - Marking for Shipment and Storage |
| MIL-STD-147 | - Palletized Unit Loads |
| MIL-STD-901 | - Provisions for Evaluating Quality of Caps, Garrison, Men's |



Source: https://assist.dla.mil -- Downloaded: 20261O-18T10:23Z
Check the source to verify that this is the current version before use.

(Copies of specifications, standards, drawings, and publications required by contractors in connection with specific procurement functions should be obtained from the procuring activity or as directed by the contracting officer).

* 2.1.2 Other Government documents, drawings, and publications. The following other Government documents, drawings, and publications form a part of this specification to the extent specified herein. Unless otherwise specified, the issues shall be those in effect on the date of the solicitation.

LAWS AND REGULATIONS

US POSTAL SERVICE MANUAL

(Copies of the manual may be obtained from the Superintendent of Documents, US Government Printing Office, Washington, DC 20402.)

* 2.2 Other publications. The following document(s) form a part of this specification to the extent specified herein. Unless otherwise specified, the issues of the documents which are DOD adopted shall be those listed in the issue of the DODISS specified in the solicitation. Unless otherwise specified, the issues of documents not listed in the DODISS shall be the issue of the nongovernment documents which is current on the date of the solicitation.

NATIONAL MOTOR FREIGHT TRAFFIC ASSOCIATION, INC., AGENT

National Motor Freight Classification

(Applications for copies should be addressed to the American Trucking Association, ATTN: Traffic Department, 1616 P Street, N.W., Washington, DC 20036).

UNIFORM CLASSIFICATION COMMITTEE, AGENT

Uniform Freight Classification

(Applications for copies should be addressed to the Uniform Classification Committee, Room 1106, 222 South Riverside Plaza, Chicago, Illinois 60606).

DEPARTMENT OF DEFENSE STANDARD COLOR CARD
OF OFFICIAL STANDARDIZED SHADES FOR SEWING THREADS

(Applications for copies shall be addressed to the Color Association of the United States, Inc., 343 Lexington Ave., New York, N.Y. 10016).

* 2.3 Order of precedence. In the event of a conflict between the text of this specification and the references cited herein, the text of this specification shall take precedence. Nothing in this specification, however, shall supersede applicable laws and regulations unless a specific exemption has been obtained.

3. REQUIREMENTS

Source: https://assist.dla.mil -- Downloaded: 202610-18T10:23Z
Check the source to verify that this is the current version before use.

3.1 Guide sample. Samples, when furnished, are solely for guidance and information to the contractor (see 6.3). Variations from this specification may appear in the sample in which case this specification shall govern.

3.2 First article. When specified, the contractor shall furnish sample unit(s) for first article inspection and approval (see 4.3 and 6.2).

3.3 Material.

3.3.1 Basic cloths.

* 3.3.1.1 Cloth, elastique, wool. The basic cloth for the Type I, Class 1 cap shall be a wool elastique cloth conforming to Type I of MIL-C-3738. The cloth shall be dyed to match Green Shade 2212.

* 3.3.1.2 Cloth, tropical, polyester/wool. The basic cloth for the Type I, Class 2 cap shall be a polyester/wool tropical conforming to Type III, Class 1 or 3 of MIL-C-21115. The cloth shall be dyed to match Khaki Shade 3729.

* 3.3.1.3 Cloth, gabardine, wool. The basic cloth for the Type I, Class 3 cap shall be a wool gabardine conforming to Type I, Class 3 of MIL-C-10176. The cloth shall be dyed to match Khaki Shade 2115.

* 3.3.1.4 Cloth, polyester/wool. The basic cloth for the Type I, Class 4 cap shall be a polyester/wool serge conforming to Type III, Class 3 of MIL-C-823. The cloth shall be dyed to match Blue Shade 3362. The standard sample piece number is 80353.

* 3.3.1.5 Cloth, twill, polyester/cotton. The basic cloth for the Type II caps shall be a polyester/cotton cloth conforming to Class 1 of MIL-C-29127. The cloth shall be dyed to match Khaki Shade 3729 for the Class 5 cap and Blue Shade 3362 for the Class 6 cap.

* 3.3.1.6 Cloth, twill rayon. The basic cloth for the lining pieces for the Type I caps (see 3.5.1) shall be a rayon twill cloth conforming to Class 1 of MIL-C-368. As an alternate, material conforming to MIL-C-44121 may be used. The cloth shall be dyed to approximate the shade of the basic fabric.

3.3.2 Sweatband. The sweatband for the Type I caps shall be made from either sheepskin leather conforming to MIL-S-3577 or from artificial leather conforming to MIL-S-43993 dyed a brown shade to finish not less than 7/8 inch in width. When Class 4 caps are procured, the sweatband shall be black.

3.3.3 Sweatband cloth. The cloth sweatband for the Type II cap shall be made of the material specified in 3.3.1.5, cut 2 1/8 inches in width, unfinished.

* 3.3.4 Thread. The thread for seaming and stitching the caps shall be a cotton-covered or rayon-covered thread conforming to 2 or 3 ply, ticket No. 50 or 70 of MIL-T-43548. The polyester core, polyester covered thread is not allowed. As an alternate, the thread for seaming and stitching the caps shall be cotton thread conforming to Type I, IC2, Ticket Nos. A, and B, 3-ply of V-T-276. The thread shall be dyed to the shade specified below, in accordance with the Standard Shades for Threads, except that the thread used for



Source: https://assist.dla.mil -- Downloaded: 2026-10-18T10:23Z
Check the source to verify that this is the current version before use.

stitching the sweatband of the Type I cap shall approximate the shade of the sweatband.

Type I caps

| | |
|---|---|
| Class 1 | - Olive Drab T-1, Cable No. 66023 |
| Classes 2 and 3 | - Khaki P-1, Cable No. 66019 |
| Class 4 | - Navy Blue AT, Cable No. 66060 |

Type II caps

| | |
|---|---|
| Class 5 | - Khaki P-1, Cable No. 66019 |
| Class 6 | - Navy Blue AT, Cable No. 66060 |

* 3.3.4.1 Colorfastness. The dyed thread shall show fastness to light, laundering, wet-dry cleaning, and perspiration equal to or better than the standard sample when tested as specified in V-T-276 or MIL-T-43548. When a standard sample is not available, the dyed thread shall show a minimum of "good" fastness to light, laundering, wet-dry cleaning, and perspiration, when tested as specified in V-T-276 or MIL-T-43548.

* 3.3.5 Labels. Each cap shall have a combination identification, size, and personal label and a separate instruction label in accordance with 3.3.5.1 and 3.3.5.2.

* 3.3.5.1 Combination label. Each cap shall have an identification, size, and personal label conforming to Type VI, classes 4 and 10, of DDD-L-20, except that the inscription shall be as shown below. The size of the label shall be not more than 1-1/2 inches in height and 2-1/2 inches in length. The height of the lettering except for the applicable size shall be 1/16 to 1/8 inch. The size lettering shall be not less than 1/4 inch. The label shall show fastness to drycleaning only when Type I caps are applicable and to laundering only when Type II caps are applicable.

NAME:
SERVICE NO.:
CAP, GARRISON, MAN'S (100% WOOL) (EXAMPLE)
CONTRACT NO.: DLA-100-00-0-000 (EXAMPLE)
STOCK NO.: 8405-00-000-0000 (EXAMPLE)
NAME OF CONTRACTOR:
SIZE:

* 3.3.5.2 Instruction label. Each cap shall have an instruction label conforming to Type VI, Class 3 of DDD-L-20. The size of the label shall be not more than 1-1/2 inches in height and 2-1/2 inches in length. The size of the lettering shall be 1/16 to 1/8 inch. The label shall show fastness to drycleaning only when Type I caps are applicable and to laundering only when Type II caps are applicable.



Source: https://assist.dla.mil -- Downloaded: 2026-10-18T10:23Z
Check the source to verify that this is the current version before use.

LAUNDERING INSTRUCTIONS

(Type I)

DRY CLEAN ONLY

(Type II)

MACHINE WASH WARM, PERMANENT PRESS CYCLE
TUMBLE DRY, MEDIUM SETTING
REMOVE PROMPTLY

DO NOT USE CHLORINE BLEACH

OR

Follow NAVEDTRA Manual 414-01-45-81 Formula II

3.4 Design. The cap shall be of a garrison style, having a three piece crown and a one piece curtain turned up on the outside of the cap with the tapered ends crossing at the front. The caps shall be lined or unlined and shall have a leather, artificial leather or basic cloth sweatband, as specified.

3.4.1 Figures. Figures 1 and 2 are furnished for information purposes only. When inconsistencies exist between the written specification and the figures, the written specification shall govern.

* 3.5 Patterns. Standard patterns to be used to cut the working patterns will be furnished by the Government (see 6.3). The working patterns shall be identical to the Government patterns. Neither the Government patterns nor the working patterns shall be altered in any way.

* 3.5.1 List of pattern parts. The caps shall be cut from material as specified, and in accordance with pattern parts indicated below:

| Material | Nomenclature | Cut parts |
|---|---|---|
| Applicable basic material | Side crown | 2 |
| | Top crown (gusset) | 1 |
| | Curtain | 1 |
| Rayon twill cloth | Side crown lining (Type I only) | 2 |

3.6 Construction.

* 3.6.1 Stitches, seams, and stitchings. Stitch, seams, and stitching types, as specified in Table I shall conform to the requirements of FED-STD-751. Whenever two or more methods for seams or stitchings are given for the same operation, any one of them may be used. Seam allowances shall be maintained with seams sewn so that no raw edges, runoffs, twists, pleats, puckers, or open seams result. All seams shall start and finish evenly. Thread tension shall be maintained so that there is no tight or loose stitching. Where stitch type 401 is used, the looper (underthread) shall be on the inside of the cap. Ends of all seams produced by stitch type 401 shall be caught in



Source: https://assist.dla.mil -- Downloaded: 20261O-18T10:23Z
Check the source to verify that this is the currentversion before use.

other seams or stitchings. The width of the safety stitch shall be 3/8 inch and the guides and knives on the safety stitch machine shall be set to trim only the ravelled ends of the fabric.

3.6.2 Stitches per inch. The minimum and maximum number of stitches per inch shall be as specified in Table I.

* 3.6.3 Thread breaks and ends of seams. Ends of type 301 seams and stitchings, when not caught in other seams or stitchings, shall be backtacked not less than 1/4 inch. The ends of a continuous line of stitching shall be overlapped not less than 1/2 inch. Thread breaks (all stitch types) shall be secured by stitching back of break not less than 1/2 inch. Skipped stitches or thread breaks may be repaired by using 301 stitch type. The ends of type 401 stitching not caught in other stitching or seams shall have a 1/2 to 3/4 inch chain extending from it.

3.7 Manufacturing operations requirements. The caps shall be manufactured in accordance with the operation requirements specified in Table I. The contractor is not required to follow the exact sequence of operations listed, provided that the finished cap is identical to that produced by following the sequence of operations as listed in Table I.

3.7.1 Shade and size marking. The component parts shall be marked or ticketed to insure a uniform shade and size throughout the cap. Any method may be used except:

1. Metal fastening devices
2. Sewn-on tickets
3. Adhesive type tickets whose adhesive causes discoloration or whose adhesive mass adheres to the material upon removal of the tickets.

The use of a rubber stamp, ink pad numbering machine, or pencil is acceptable provided the numbers are legible and are not visible on the outside of the cap.

3.7.2 Pressing. All pressing as required in Table I shall be performed with a steam iron or steam pressing machine.

* 3.7.3 Abbreviations in table of operations. The abbreviations used in Table I are as follows:

| | | |
|---|---|---|
| Stch | - | Stitch |
| in | - | inch |
| Ndl | - | Needle |
| Bob | - | Bobbin |
| Lpr | - | Looper |
| Mchne | - | Machine |
| Brtck | - | Bartack |
| Comrcl | - | Commercial |
| smlr | - | similar |
| Btnhl | - | Buttonhole |
| incl | - | including |
| dbl | - | double |



Source: https://assist.dla.mil -- Downloaded: 2026-10-18T10:23Z
Check the source to verify that this is the current version before use.

TABLE I - CONSTRUCTION OF GARRISON CAP

| NO. | OPERATION | STCH TYPE | SEAM/ STCH TYPE | STCH IN | THREAD NDL BOB/ LPR |
|---|---|---|---|---|---|
| 1. | Cutting.<br>a. The component parts of the garrison cap shall be cut in strict accordance with the patterns furnished, which show size, shape, directional lines for cutting, and notches for proper assembly of all component parts.<br><br>b. All component parts cut from basic material or lining (Type I only) shall be from one piece of material. Ends shall not be used.<br><br>c. The component parts cut from the basic material or lining (Type I only) shall finish with the face side of the material on the outside.<br><br>d. Cut the leather sweatband (Type I only) from one piece of material.<br><br>e. The cloth sweatband for the Type II garrison cap shall be cut from basic material with the edges turned under approximately 3/8 inch and finish in the cap 1 1/4 to 1 3/8 inches in width. (The length will vary with the size of the cap). | | | | |
| 2. | Replacement of defective components.<br>During the spreading, cutting, and manufacturing processes, components having material defects or damages that are classified as defects in MIL-STD-901, shall be removed from production and replaced with non-defective and properly matched components. | | | | |
| 3. | Shade and size marking.<br>All component parts cut from the basic material or lining (Type I only) shall be marked or ticketed in accordance with 3.7.1. | | | | |



Source: https://assist.dla.mil -- Downloaded: 2026-10-18T10:23Z
Check the source to verify that this is the current version before use.

TABLE I - CONSTRUCTION OF GARRISON CAP

| NO. | OPERATION | STCH TYPE | SEAM/ STCH TYPE | STCH IN | THREAD NDL | THREAD BOB/ LPR |
|---|---|---|---|---|---|---|
| | Construction of Type I Cap. | | | | | |
| 4. | Assemble top crown (gusset) and side crown pieces. | | | | | |
| | a. Fold the top crown (gusset) in half in the length direction and stitch a dart on the inside, 1/16 inch along the fold, extending to a point 3/8 inch from each pointed end of the gusset. Press the gusset flat with dart in folded position. | 301 or 401 | OSf-1 | 12-14 | 50<br>50 | 50<br>70 |
| | b. The finished top crown (gusset) piece shall measure 1 3/8 (+ 1/8) inches in width at center. | | | | | |
| | c. Superimpose face of side crown pieces against face of top crown (gusset) with back of gusset against face of lining and with raw edges even. Stitch 1/4 (+ 1/16) inch from raw edges through all plies. | 301 or 401 | LSq-2 (a) | 12-14 | 50<br>50 | 50<br>70 |
| | d. Turn back lining piece and top crown (gusset) piece (see Figure 2) and topstitch 1/16 inch from the folded edge through the gusset, lining piece and seam allowances. | 301 or 401 | LSq-2 (b) | 12-14 | 50<br>50 | 50<br>70 |
| | NOTE: There shall be no visible evidence of topstitching on the outside of the side crown piece. | | | | | |
| | e. Stitch the center front and center back seams of the side crown pieces, 1/4 (+ 1/16) inch from the raw edges. | 301 or 401 | SSa-1 | 12-14 | 50<br>50 | 50<br>70 |
| | f. Stitch the front and back seams of the lining pieces 1/4 (+ 1/16) inch from the raw edges. The lining shall be free from the side crown proper. | 301 or 401 | SSa-1 | 12-14 | 50<br>50 | 50<br>70 |
| | g. Position the combination label on the right side lining piece and the instruction label on the left side lining piece, each approximately 2 inches from the bottom edge and center back seam of the lining piece. Stitch around all sides. The bottom edge of labels shall finish parallel to the bottom edge of the lining. | 301 | LSbj-1 | 12-14 | 50 | 50 |



Source: https://assist.dla.mil -- Downloaded: 2026-10-18T10:23Z
Check the source to verify that this is the current version before use.

TABLE I - CONSTRUCTION OF GARRISON CAP

| NO. | OPERATION | STCH TYPE | SEAM/ STCH TYPE | STCH IN | THREAD NDL | THREAD BOB/ LPR |
|---|---|---|---|---|---|---|
| | h. Overedge stitch lining pieces to side crown pieces around the bottom edge. | 503 504 or 602 | SSa-1 | 8-10 | 70 | 70 |
| 5. | Assemble curtain. | | | | | |
| | a. Overedge the outer edge of curtain. | 503 504 or 602 | EFd-1 | 8-10 | 70 | 70 |
| | b. Turn under outer edge of curtain and double needle stitch 1/4 (+ 1/16) inch gauge with the outer row of stitching 1/16 inch from folded edge. The finished hem shall measure 1/2 (+ 1/8) inch in width. | 301 or 401 | EFa-2 | 12-14 | 50<br>50 | 50<br>70 |
| | c. Overedge the bottom edge of curtain. | 503 504 or 602 | EFd-1 | 8-10 | 70 | 70 |
| | d. Overlap curtain as indicated by marks on patterns and stitch 1/8 to 3/16 inch from the raw edge. | 301 or 401 | LSa-1 | 12-14 | 50<br>50 | 50<br>70 |
| | e. Overlap side crown pieces over curtain 3/8 inch and stitch 1/4 (+ 1/16) inch from the raw edge. | 301 or 401 | LSa-1 | 12-14 | 50<br>50 | 50<br>70 |
| | f. The overlap shall finish 4 5/8 (+ 1/4) inches from end to center front and shall be on the right side as worn (see Figure 1). | | | | | |
| 6. | Attach leather sweatband. | | | | | |
| | a. To insure proper size and fit, the cap shall be completely pressed with a heated pressing machine before sewing in the leather sweatband. It is recommended that a suitable pressing template (backing) be inserted between the curtain and side crown on each side of cap. | | | | | |
| | b. Smooth curtain on template and press cap flat, carefully folding and creasing the bottom edge. | | | | | |
| | c. Remove all pressing marks and gloss. | | | | | |



Source: https://assist.dla.mil -- Downloaded: 202640-18T10:23Z
Check the source to verify that this is the current version before use.

TABLE I - CONSTRUCTION OF GARRISON CAP

| NO. | OPERATION | STCH TYPE | SEAM/ STCH TYPE | STCH IN | THREAD/ NDL | THREAD/ BOB/ LPR |
|---|---|---|---|---|---|---|
| | d. Stitch sweatband to the lower edge of the cap with the ends overlapping 3/4 (± 1/4) inch at the back. The seam shall finish not more than 1 1/2 inches to the right or left of the seam at the back of the cap and the ends shall not finish on the back seam. | 304 or 404 | LSa-1 | 8-10 | 50<br>50 | 50<br>70 |
| | e. Stitch overlapped ends of the sweatband together the full width of the sweatband. | 304 or 404 | LSa-1 | 8-10 | 50<br>50 | 50<br>70 |
| | or | | | | | |
| | f. Cut the sweatband to the required length and butt the ends together. Join ends with a row of zig-zag stitching, reinforced on the underside with a strip of coated material. | 304 or 404 | FSe-1 | 8-10 | 50<br>50 | 50<br>70 |
| | NOTE: The reinforcement piece shall be a 5/8 inch wide strip of print cloth or sheeting, coated lightly on both sides with pyroxylin or vinyl. | | | | | |
| | g. Stitch the sweatband to lower edge of cap. | 304 or 404 | LSa-1 | 12-14 | 50<br>50 | 50<br>70 |
| | h. The finished sweatband, regardless of the applicable operation used for attachment, shall be as follows: | | | | | |
| | 1. The sweatband shall not be exposed beyond the bottom edge of cap. | | | | | |
| | 2. The stitching shall not extend into the sweatband more than 1/8 inch from the edge. | | | | | |
| | 3. The sweatband shall be located 1/4 (± 1/16) inch from folded edge of curtain. | | | | | |
| 7. | Finishing.<br>Turn apron up to finished position. All thread ends shall be trimmed, and loose threads removed from cap. All spots, stains, and shade tickets shall be removed without damaging the material. | | | | | |
| | NOTE: Caution shall be made so not to harm the material when trimming. | | | | | |



Source: https://assist.dla.mil -- Downloaded: 2026-10-18T10:23Z
Check the source to verify that this is the current version before use.

TABLE I - CONSTRUCTION OF GARRISON CAP

| NO. | OPERATION | STCH TYPE | SEAM/ STCH TYPE | STCH IN | THREAD NDL | THREAD BOB/ LPR |
|---|---|---|---|---|---|---|
| 8. | Pressing. It is recommended that a suitable pressing template (backing) be inserted between the cap curtain and side crown piece on each side of the cap. Smooth curtain on template and press cap flat with a heated pressing machine, carefully folding and creasing the bottom edge. Remove all pressing marks and gloss. The sweatband shall not be exposed beyond the bottom edge of the cap. | | | | | |
| | **Construction of Type II Cap** | | | | | |
| 9. | Assemble top crown (gusset) and crown side pieces. | | | | | |
| | a. Fold the top crown (gusset) in half in the length direction and stitch a dart on the inside, 1/16 inch along the fold, extending to a point 3/8 inch from each pointed end of the gusset. Press the gusset flat with dart in folded position. | 301 or 401 | OSt-1 | 12-14 | 50<br>50 | 50<br>70 |
| | b. The finished top crown (gusset) piece shall measure 1 3/8 (+ 1/8) inches in width at center. | | | | | |
| | c. Superimpose the side crown pieces to the top crown (gusset), face to face, aligning raw edges. Stitch each crown side piece to appropriate edge of gusset, 1/4 (+ 1/16) inch from the raw edge. | 301 or 401 | LSq-2 (a) | 12-14 | 50<br>50 | 50<br>70 |
| | d. Overedge stitch the edges together.<br>or | 503<br>504 or 602 | SSa-1 | 8-10 | 70 | 70 |
| | e. Operations 9c and 9d may be performed in one operation by simultaneously stitching and overedging. | 515<br>516 or<br>519 | SSa-2 | 12-14 | 50<br>70 | 70<br>(chain-stching)<br>70<br>(over-edging) |
| | f. Turn back the top crown (gusset) piece (see Figure 2) and topstitch through the gusset piece and seam allowances, 1/16 inch from the folded edge. | 301 or 401 | LSq-2 (b) | 12-14 | 50<br>50 | 50<br>70 |



Source: https://assist.dla.mil -- Downloaded: 202640-18T10:23Z
Check the source to verify that this is the current version before use.

TABLE I - CONSTRUCTION OF GARRISON CAP

| NO. | OPERATION | STCH TYPE | SEAM/ STCH TYPE | STCH IN | THREAD NDL | THREAD BOB/ LPR |
|---|---|---|---|---|---|---|
| | NOTE: There shall be no visible evidence of topstitching on the outside of the side crown pieces. | | | | | |
| | g. Stitch the center front and center back seams of the side crown pieces, 1/4 (± 1/16) inch from the raw edges. | 301 or 401 | SSa-1 | 12-14 | 50<br>50 | 50<br>70 |
| | h. Overedge stitch the edges together. | 503<br>504 or 602 | SSa-1 | 8-10 | 70 | 70 |
| | or | | | | | |
| | i. Operations 9g and 9h may be performed in one operation by simultaneously stitching and overedging. | 515<br>516 or<br><br>519 | SSa-2 | 12-14 | 50<br><br>70 | 70<br>(chain-stching)<br>70<br>(over-edging) |
| | j. Overedge raw edge around the bottom of the crown. | 503<br>504 or 602 | EFd-1 | 8-10 | 70 | 70 |
| | k. Press top crown (gusset) and crown side pieces smooth and flat. | | | | | |
| 10. | Assemble curtain. | | | | | |
| | a. Overedge outer edge of curtain. | 503<br>504 or 602 | SSa-1 | 8-10 | 70 | 70 |
| | b. Turn under outer edge of curtain and double needle stitch 1/4 (± 1/16) inch gauge along turned edge with top row of stitching 1/16 inch from the folded edge. The finished hem shall measure 1/2 (± 1/8) inch in width. | 301 or 401 | EFa-2 | 12-14 | 50<br>50 | 50<br>70 |
| | c. Overlap curtain as indicated by marks on pattern and stitch 1/8 to 3/16 inch from the raw edge. | 301 or 401 | LSa-1 | 12-14 | 50<br>50 | 50<br>70 |
| | d. Overlap side crown pieces over curtain 3/8 inch and stitch 1/4 (± 1/16) inch from the raw edge. | 301 or 401 | LSa-1 | 12-14 | 50<br>50 | 50<br>70 |
| | e. The overlap shall finish 4 5/8 (± 1/4) inches from end to center front and shall be on the right side as worn (see Figure 1). | | | | | |



Source: https://assist.dla.mil -- Downloaded: 2026-10-18T10:23Z
Check the source to verify that this is the current version before use.

TABLE I - CONSTRUCTION OF GARRISON CAP

| NO. | OPERATION | STCH TYPE | SEAM/ STCH TYPE | STCH IN | THREAD NDL | THREAD BOB/ LPR |
|---|---|---|---|---|---|---|
| 11. | Make and attach sweatband and labels. | | | | | |
| | *a. Fold top and bottom ends of sweatband over 3/8 (+ 1/16) inch. Press to maintain folds. | | OSf | | | |
| | b. Align the bottom edge of the sweatband with the bottom edge of the crown around the inside of the cap. Stitch the sweatband to the cap with two rows of stitching, 1/16 inch from each folded edge, simultaneously inserting and catching the bottom edge of the combination label in the top edge of stitching on the right inside crown piece, and catching the bottom edge of the instruction label in the top edge of stitching on the left inside crown piece. Overlap ends of sweatband 1 (+ 1/4) inch at the back of the cap, and turn top end under 1/4 to 3/8 inch. | 301 | Combination of LSa-2 and SSaa-2 | 12-14 | 50 | 50 |
| | c. The seam shall finish not more than 1 1/2 inches to the right or left of the seam at back of cap, and the ends shall not finish on the back seam. | | | | | |
| | d. Stitch the overlapped ends of the sweatband together across the full width, 1/16 to 1/8 inch from the outer folded edge. | 301 or 401 | LSd-1 | 12-14 | 50<br>50 | 50<br>70 |
| | e. Stitch around all the unattached edges of the labels, 1/16 inch from the edges. | 301 | LSbj-1 | 12-14 | 50 | 50 |
| | NOTE The label stitching shall not show above the apron on the outside of the finished cap. | | | | | |
| 12. | Finishing. | | | | | |
| | Turn apron up to finished position. All thread ends shall be trimmed, and loose threads removed from cap. All spots, stains, and shade tickets shall be removed without damaging the material. | | | | | |
| | NOTE: Caution shall be made so not to harm the material when trimming. | | | | | |



Source: https://assist.dla.mil -- Downloaded: 202610-18T10:23Z
Check the source to verify that this is the current version before use.

TABLE I - CONSTRUCTION OF GARRISON CAP

| NO. | OPERATION | STCH TYPE | SEAM/ STCH TYPE | STCH IN | THREAD NDL BOB/ LPR |
|---|---|---|---|---|---|
| 13. | Pressing.<br>It is recommended that a suitable pressing template (backing) be inserted between the cap curtain and side crown piece on each side of the cap. Smooth curtain on template and press cap flat with a heated pressing machine, carefully folding and creasing the bottom edge. Remove all pressing marks and gloss. The sweatband shall not be exposed beyond the bottom edge of the cap. | | | | |



Source: https://assist.dla.mil -- Downloaded: 2026-10-18T10:23Z
Check the source to verify that this is the current version before use.

* 3.8 Measurements. The finished caps shall conform to the measurements as shown in Table III. All measurements and tolerances are expressed in inches.

Table III - Sizes and finished measurements

| | A | B | C | D | E | F | G |
|---|---|---|---|---|---|---|---|
| | | Height of crown | | | Height of curtain | | |
| Size | Head Measurement | Front | Center | Back | Front | Back | Length of overlap |
| 6 1/2 | 20 1/2 | 3 1/4 | 4 1/2 | 4 | 2 1/2 | 3 | 4 5/8 |
| 6 5/8 | 20 7/8 | 3 1/4 | 4 1/2 | 4 | 2 1/2 | 3 | 4 5/8 |
| 6 3/4 | 21 1/4 | 3 1/4 | 4 1/2 | 4 | 2 1/2 | 3 | 4 5/8 |
| 6 7/8 | 21 5/8 | 3 1/4 | 4 1/2 | 4 | 2 1/2 | 3 | 4 5/8 |
| 7 | 22 | 3 1/4 | 4 1/2 | 4 | 2 1/2 | 3 | 4 5/8 |
| 7 1/8 | 22 3/8 | 3 1/4 | 4 1/2 | 4 | 2 1/2 | 3 | 4 5/8 |
| 7 1/4 | 22 3/4 | 3 1/4 | 4 1/2 | 4 | 2 1/2 | 3 | 4 5/8 |
| 7 3/8 | 23 1/8 | 3 1/4 | 4 1/2 | 4 | 2 1/2 | 3 | 4 5/8 |
| 7 1/2 | 23 1/2 | 3 1/4 | 4 1/2 | 4 | 2 1/2 | 3 | 4 5/8 |
| 7 5/8 | 23 7/8 | 3 1/4 | 4 1/2 | 4 | 2 1/2 | 3 | 4 5/8 |
| 7 3/4 | 24 1/4 | 3 1/4 | 4 1/2 | 4 | 2 1/2 | 3 | 4 5/8 |
| 7 7/8 | 24 5/8 | 3 1/4 | 4 1/2 | 4 | 2 1/2 | 3 | 4 5/8 |
| 8 | 25 | 3 1/4 | 4 1/2 | 4 | 2 1/2 | 3 | 4 5/8 |
| Tol. | + 1/4 - 1/8 | ± 1/8 | ± 1/4 | ± 1/4 | ± 1/8 | ± 1/8 | ± 1/4 |

NOTE: A thru G refer to Figure 1

A. Twice the measurement taken from the bottom of cap, inside folded edge to inside folded edge.
B. Measurement shall be taken from bottom folded edge of curtain to juncture of side crown and top crown (gusset) at center front.
C. Measurement shall be taken at center of cap, from bottom folded edge of curtain to top edge of side crown.
D. Measurement shall be taken from bottom folded edge of curtain to junction of side crown and top crown (gusset) at center back.
E. Measurement shall be taken from bottom folded edge of curtain to top edge of curtain at center front.
F. Measurement shall be taken from bottom folded edge of curtain to top edge of curtain at center back.
G. Measurement shall be taken from base of overlap to folded edge of curtain at center front.

3.9 Workmanship. The finished caps shall conform to the quality of product established by this specification. The occurrence of defects shall not exceed the applicable point values specified in MIL-STD-901.

4. QUALITY ASSURANCE PROVISIONS

4.1 Responsibility for inspection. Unless otherwise specified in the contract, the contractor is responsible for the performance of all inspection requirements as specified herein. Except as otherwise specified in the contract or order, the contractor may use his own or any other facilities suitable for performance of the inspection requirements specified herein,



Source: https://assist.dla.mil -- Downloaded: 202610-18T10:23Z
Check the source to verify that this is the current version before use.

unless dissapproved by the Government. The Government reserves the right to perform any of the inspections set forth in the specification where such inspections are deemed necessary to assure supplies and services conform to prescribed requirements.

* 4.1.1 Responsibility for compliance. All items must meet all requirements of sections 3 and 5. The inspection set forth in this specification shall become a part of the contractor's overall inspection system or quality program. The absence of any inspection requirements in the specification shall not relieve the contractor of the responsibility of assuring that all products or supplies submitted to the Government for acceptance comply with all requirements of the contract. Sampling in quality conformance does not authorize submission of known defective material, either indicated or actual, nor does it commit the Government to acceptance of defective material.

4.1.2 Certificate of compliance. Where certificates of compliance are submitted, the Government reserves the right to check test such items to determine the validity of the certification.

4.2 Classification of inspection. The inspection requirements specified herein are classified as follows:

1. First article inspection (see 4.3).
2. Quality conformance inspection (see 4.4).

4.3 First article inspection. The first article, submitted in accordance with 3.2, shall be inspected for conformance with design, construction, workmanship, and dimensional requirements.

4.4 Quality conformance inspection. Sampling for inspection shall be performed in accordance with MIL-STD-901, except where otherwise indicated.

4.4.1 Component and material inspection. In accordance with 4.1 above, components and materials shall be tested in accordance with all the requirements of referenced specifications, drawings, and standards unless otherwise excluded, amended, modified, or qualified in this specification or applicable procurement document.

4.4.2 Examination of the end item. Examination of the end item shall be in accordance with MIL-STD-901.

4.4.3 Dimensional examination. The dimensional examination provisions for the finished caps shall be as specified in MIL-STD-901.

4.4.4 Examination of packaging requirements. Examination of packaging requirements shall be in accordance with MIL-STD-901.

* 4.4.5 Palletization examination. An examination shall be made to determine that the palletization complies with the section 5 requirements. Defects shall be scored in accordance with the list below. The sample unit shall be one palletized unit load fully packaged. The lot size shall be the number of palletized unit loads in the end item inspected lot. The inspection level shall be S-1 and the AQL, expressed in terms of defects per hundred units, shall be 6.5 in accordance with MIL STD-105.



Source: https://assist.dla.mil -- Downloaded: 2026-10-18T10:23Z
Check the source to verify that this is the current version before use.

| Examine | Defect |
|---|---|
| Finished dimensions | Length, width, or height exceeds specified maximum requirements. |
| Palletization | Pallet pattern not as specified.<br>Interlocking of loads not as specified.<br>Load not bonded with required straps as specified. |
| Weight | Exceeds maximum load limits. |
| Marking | Omitted, incorrect, illegible, of improper size, location, sequence, or method of application. |

5. PACKAGING

5.1 Preservation packaging. Preservation packaging shall be level A or C as specified (see 6.2).

* 5.1.1 Level A. Each cap shall be inserted into a snug-fitting, flat style, clear polyethylene film bag of 0.00125 inch thickness (+ 25 percent tolerance). The bag may be fabricated from polyethylene film tubing or sheeting. The polyethylene bag shall be formed with heat sealed seams that are straight, continuous, and parallel to each other and the formed edges of the bag. All seams and closures shall be formed by heat sealing. A 1/4 inch hole shall be made at one corner of the bag to allow excess air to escape. As an alternate, the polyethylene bag may be of the tuck-in or reverse flap type where a heat seal closure and corner hole are not required.

5.1.2 Level C. Caps shall be preserved-packed to afford adequate protection against deterioration and physical damage during shipment from the contractor to the first receiving activity. The package and the quantity per package shall be the same as that normally used by the contractor for retail distribution.

5.2 Packing. Packing shall be level A, B, or C as specified (see 6.2).

* 5.2.1 Level A. Fifty (50) Type I Class 1 caps or eighty (80) Type I Classes 2 through 4 or seventy-five (75) Type II Classes 5 or 6 caps of one size only, packaged as specified in 5.1, shall be packed in a fiberboard shipping container assembled, closed, and reinforced conforming to Type CF, Class Weather-Resistant, Variety DW, Grade V15c, Size 1A of MIL-B-17757. The fiberboard for the box liner shall conform to Type CF, Class Domestic of MIL-B-17757. Level A packages shall be packed flat, with the length parallel to the side of the container. Each container shall have the contents completely covered on the top and bottom with a sheet of commercial grade kraft paper. Toward the end of the contract, or when there are less than the required amount per container of the same size, mixed sizes may be packed within the same shipping container.

* 5.2.2 Level B. Fifty (50) Type I Class 1 caps or eighty (80) Type I Classes 2 through 4 or seventy-five (75) Type II Classes 5 or 6 caps of one size only, packaged as specified in 5.1, shall be packed in a fiberboard shipping container assembled, closed, and reinforced conforming to Type CF, Class



Source: https://assist.dla.mil -- Downloaded: 2026-10-18T10:23Z
Check the source to verify that this is the current version before use.

Domestic, Variety DW, Grade 200, Size 1A of MIL-B-17757. The fiberboard for the box liner shall conform to Type CF, Class Domestic of MIL-B-17757. Level A packages shall be packed flat, with the length parallel to the side of the container. Each container shall have the contents completely covered on the top and bottom with a sheet of commercial grade kraft paper. Toward the end of the contract, or when there are less than the required amount per container of the same size, mixed sizes may be packed within the same shipping container.

5.2.3 Level C. Item packaged, as specified in 5.1, shall be packed in a manner to insure carrier acceptance and safe delivery at destination at the lowest transportation rate for such supplies. The quantity per shipping container shall be the same as that normally used by the contractor for retail distribution. Containers shall comply with the US Postal Service Manual, Uniform Freight Classification Rules or National Motor Freight Classification Rules, as applicable.

* 5.2.4 Palletization. When specified (see 6.2) item, packed as specified shall be palletized on a 4-way entry pallet in accordance with load type IA of MIL-STD-147. Each prepared load shall be bonded with primary and secondary straps in accordance with the bonding means C, K, and L or O or P. Pallet patterns shall be in accordance with the appendix of MIL-STD-147.

The pallet shall be 4-way, Type IV; Type V, Class 1, Size 2; or Type VIII, fabricated from wood groups I, II, III, or IV, Grade A of NN-P-71, or 4-way, Style 1, Size A, Type I, Class 1 fabricated from wood groups specified, of MIL-P-15011. Interlocking of loads shall be effected by reversing the pattern of each course. If the container is of a size which does not conform to any of the patterns specified in MIL-STD-147, the pallet pattern used shall first be approved by the contracting officer.

5.3 Marking. In addition to any special marking required by the contract or order, interior packages and shipping containers shall be marked in accordance with MIL-STD-129.

* 5.3.1 Polyethylene bagged packages. Polyethelene bagged packages shall have the required information legibly printed or stamped in black directly on the bag across the center face or on a white paper label inserted within the bag so as to permit ready identification. The bag or label shall indicate the following information:

CAP, GARRISON, MAN'S
STOCK NUMBER:
SIZE:
QUANTITY:

* 5.3.2 Labels, mixed sizes. Each shipping container, packed with mixed sizes only, shall have securely attached to the end and side, directly under the printing or stenciling, a white paper label 4 by 5 inches with the words "Mixed NSN's" plainly stamped or printed thereon and under these words shall be legibly stamped or printed the correct quantity and national stock numbers contained therein.

6. NOTES



Source: https://assist.dla.mil -- Downloaded: 202640-18T10:23Z
Check the source to verify that this is the current version before use.

* 6.1 Intended use. The caps are intended for wear by the following Navy and Coast Guard personnel, as applicable:

a. Commissioned Officers
b. Naval Academy Midshipmen
c. Naval Reserve Officer Training Corps Midshipmen
d. Officer Candidates and Reserve Officer Candidates
e. Naval Aviation Cadets and Aviation Officer Candidates
f. Chief Petty Officers
g. Coast Guard male personnel

* 6.2 Ordering data. Procurement documents should specify the following:

a. Title, number, and date of this specification.
b. Size, type and class required (see 1.2).
c. When first article inspection is required (see 3.2), the item will be tested and should be a first article sample. The Contracting Officer should include specific instructions in acquisition documents regarding arrangement for examinations, quantity, and testing and approval.
d. Selection of applicable levels of packaging and packing (see 5.1 and 5.2).
e. When palletization is required (see 5.2.4).

6.3 Samples and patterns. For access to samples and patterns, address the procuring activity issuing the invitation for bids (see 3.1 and 3.5).

6.4 Changes from previous issue. The margins of this specification are marked with an asterisk to indicate where changes (additions, modifications, corrections, deletions) from the previous issue were made. This was done as a convenience only and the Government assumes no liability whatsoever for any inaccuracies in these notations. Bidders and contractors are cautioned to evaluate the requirements of this document based on the entire content irrespective of the marginal notations and relationship to the last previous issue.

* 6.5 Subject term (Key Word) listing.
Cap, Man's
Lined
Style, Garrison
Sweatband, Cloth
Sweatband, Leather
Unlined

Custodian:
Navy - NU

Preparing Activity:
Navy - NU

Review Activity:
DLA - CT

Project No. 8405-0020

User Activity:
Navy - CG



Source: https://assist.dla.mil -- Downloaded: 202610-18T10:23Z
Check the source to verify that this is the current version before use.

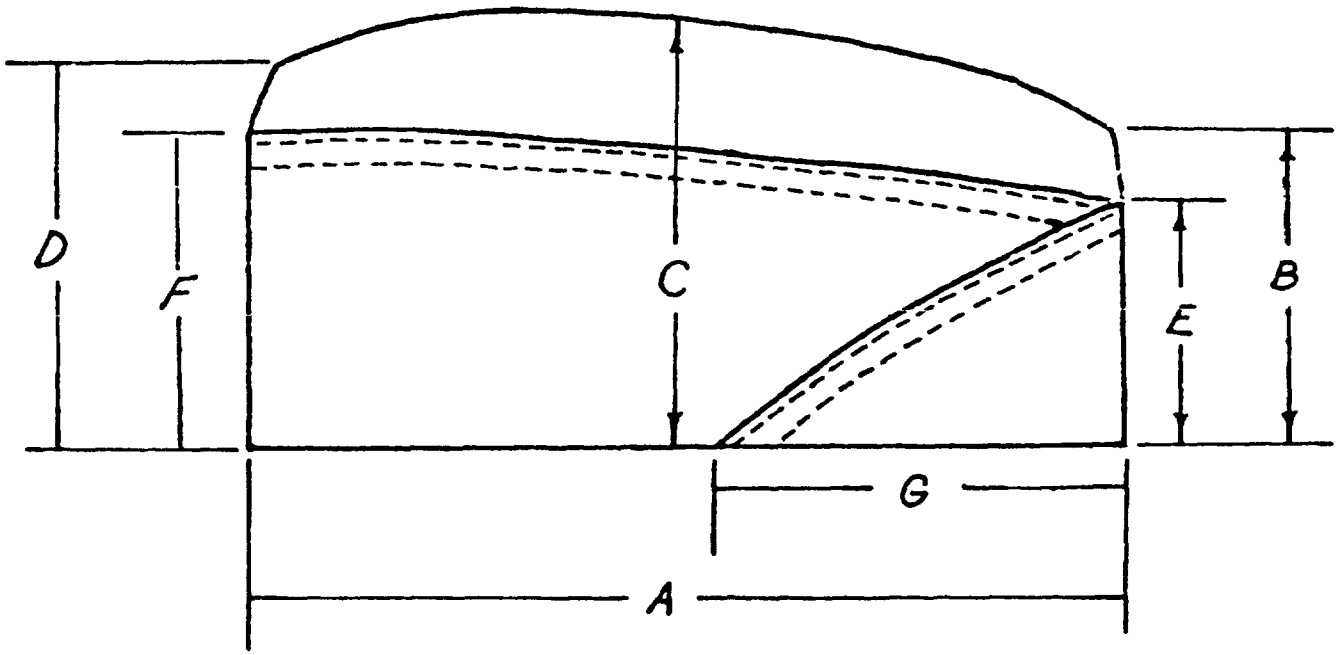
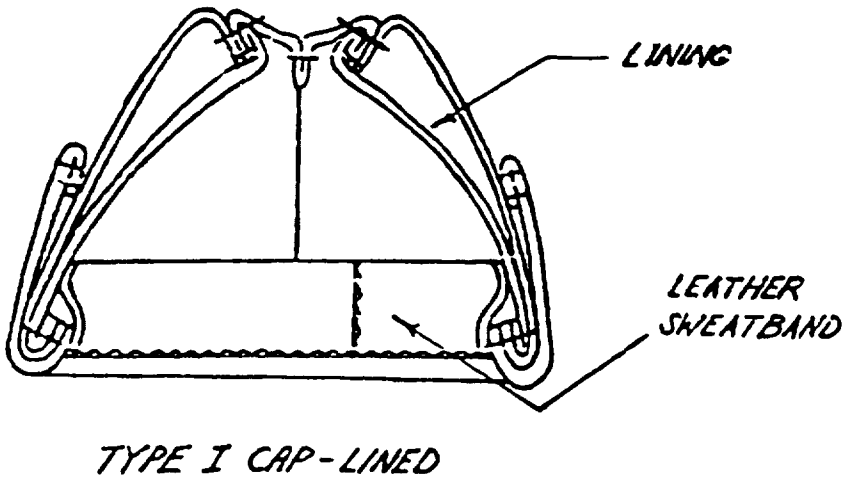


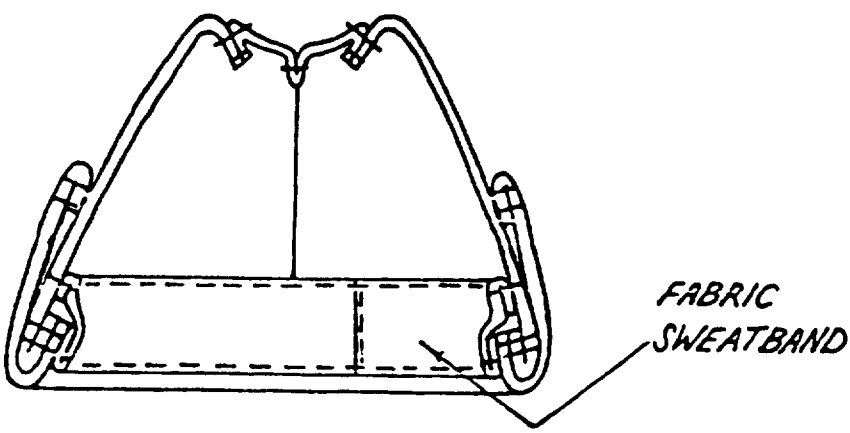

Figure 1 - Cap, Garrison, Man's



Source: https://assist.dla.mil -- Downloaded: 2026-10-18T10:23Z
Check the source to verify that this is the current version before use.




TYPE I CAP - LINED




TYPE II CAP - UNLINED

Figure 2 - Cap, Garrison, Man's



Source: https://assist.dla.mil -- Downloaded: 202610-18T10:23Z
Check the source to verify that this is the current version before use.

**INSTRUCTIONS.** In a continuing effort to make our standardization documents better, the DoD provides this form for use in submitting comments and suggestions for improvements. All users of military standardization documents are invited to provide suggestions. This form may be detached, folded along the lines indicated, taped along the loose edge *(DO NOT STAPLE)*, and mailed. In block 5, be as specific as possible about particular problem areas such as wording which required interpretation, was too rigid, restrictive, loose, ambiguous, or was incompatible, and give proposed wording changes which would alleviate the problems. Enter in block 6 any remarks not related to a specific paragraph of the document. If block 7 is filled out, an acknowledgement will be mailed to you within 30 days to let you know that your comments were received and are being considered.

*NOTE* This form may not be used to request copies of documents, nor to request waivers, deviations, or clarification of specification requirements on current contracts. Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document(s) or to amend contractual requirements.

*(Fold along this line)*

*(Fold along this line)*

DEPARTMENT OF THE NAVY

NO POSTAGE NECESSARY IF MAILED IN THE UNITED STATES

OFFICIAL BUSINESS
PENALTY FOR PRIVATE USE $300

**BUSINESS REPLY MAIL**
FIRST CLASS PERMIT NO 12503 WASHINGTON D C

POSTAGE WILL BE PAID BY THE DEPARTMENT OF THE NAVY

Officer in Charge
Navy Clothing & Textile Research Facility
21 Strathmore Road (Code 50)
Natick, MA 01760-2490

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T10:23Z
Check the source to verify that this is the current version before use.

# STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

*(See Instructions – Reverse Side)*

| 1 DOCUMENT NUMBER | 2 DOCUMENT TITLE |
|---|---|
| MIL-C-17614F(NU) | CAP, GARRISON, MAN'S |

| 3a. NAME OF SUBMITTING ORGANIZATION | 4 TYPE OF ORGANIZATION *(Mark one)* |
|---|---|
| | ☐ VENDOR |
| | ☐ USER |
| b. ADDRESS *(Street, City, State, ZIP Code)* | ☐ MANUFACTURER |
| | ☐ OTHER *(Specify)* _____ |

5 PROBLEM AREAS

a. Paragraph Number and Wording

b. Recommended Wording

c. Reason/Rationale for Recommendation

6 REMARKS

| 7a. NAME OF SUBMITTER *(Last, First, MI)* – Optional | b. WORK TELEPHONE NUMBER *(Include Area Code)* – Optional |
|---|---|
| c. MAILING ADDRESS *(Street, City, State, ZIP Code)* – Optional | 8. DATE OF SUBMISSION *(YYMMDD)* |

DD FORM 82 MAR 1426 PREVIOUS EDITION IS OBSOLETE

Source: https://assist.dla.mil -- Downloaded: 202610-18T10:23Z
Check the source to verify that this is the current version before use.