MIL-C-17620E(NU)
2 September 1981
SUPERSEDING
MIL-C-17620D(SA)
22 October 1975

MILITARY SPECIFICATION

CROWN, SERVICE CAP (MAN'S)

This specification is approved for use by the Navy Clothing and Textile Research Facility, Department of the Navy, and is available for use by all Departments and Agencies of the Department of Defense.

1. SCOPE

1.1 Scope. This specification covers the requirements for men's cap crowns.

1.2 Classification. The cap crowns shall be procured in the following types, classes, and sizes as specified (see 6.2):

Type I - Unlined

Class 1 - White 3035
Class 2 - Khaki 2101

Type II - Lined

Class 2 - Tan 3729
Class 3 - Khaki 2104

Schedule of sizes

6-1/2, 6-5/8, 6-3/4, 6-7/8, 7, 7-1/8, 7-1/4, 7-3/8, 7-1/2, 7-5/8, 7-3/4, 7-7/8, and 8

2. APPLICABLE DOCUMENTS

Beneficial comments (recommendations, additions, and deletions) and any pertinent data which may be of use in improving this document should be addressed to: Officer in Charge, Navy Clothing and Textile Research Facility, 21 Strathmore Road, Natick, MA 01760 by using the self-addressed Standardization Document Improvement Proposal (DD Form 1426) appearing at the end of this document or by letter.

FSC 8405

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T10:24Z
Check the source to verify that this is the current version before use.

* 2.1 Issue of documents. The following documents of the issue in effect on date of invitation for bids or request for proposal, form a part of this specification to the extent specified herein.

SPECIFICATIONS

FEDERAL

V-T-276	- Thread, Cotton
DDD-B-1199	- Binding, Textile, Cotton, Bias-Cut
DDD-L-20	- Label; For Clothing, Equipage, and Tentage (General Use)
PPP-B-636	- Boxes, Shipping, Fiberboard

MILITARY

MIL-C-368	- Cloth, Satin, Rayon and Cloth, Twill, Rayon
MIL-C-10176	- Cloth, Gabardine; Wool, Polyester and Wool
MIL-C-21115	- Cloth, Tropical; Wool, Polyester, Wool
MIL-C-29127	- Cloth, Twill, Polyester/Cotton (Crease-Resistant Finish)
MIL-C-29148	- Cloth, Double-Plain Weave, Cotton, White
MIL-T-43548	- Thread, Polyester, Cotton-Covered

STANDARDS

FEDERAL

FED-STD-191	- Textile Test Methods
FED-STD-751	- Stitches, Seams, and Stitchings

MILITARY

MIL-STD-105	- Sampling Procedures and Tables for Inspection by Attributes
MIL-STD-129	- Marking for Shipment and Storage
MIL-STD-1394	- Provisions for Evaluating Quality of Cap Crowns

LAWS AND REGULATIONS

U.S. POSTAL SERVICE MANUAL

(Copies of the manual may be obtained from the Superintendent of Documents, U.S. Government Printing Office, Washington, D.C. 20402.)

(Copies of specifications, standards, drawings, and publications required by contractors in connection with specific procurement functions should be obtained from the procuring activity or as directed by the contracting officer.)

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T10:24Z
Check the source to verify that this is the current version before use.

2.2 Other publications. The following documents form a part of this specification to the extent specified herein. Unless a specific issue is identified, the issue in effect on date of invitation for bids or request for proposal shall apply:

NATIONAL MOTOR FREIGHT TRAFFIC ASSOCIATION, INC., AGENT
National Motor Freight Classification

(Application for copies should be addressed to American Trucking Associations, ATTN: Traffic Dept., 1616 P Street, N.W., Washington, D.C. 20036.)

UNIFORM CLASSIFICATION COMMITTEE, AGENT
Uniform Freight Classification

(Application for copies should be addressed to the Uniform Classification Committee, Room 1106, 222 South Riverside Plaza, Chicago, IL 60606.)

3. REQUIREMENTS

3.1 Guide sample. Samples, when furnished, are solely for guidance and information to the contractor (see 6.3). Variations from this specification may appear in the sample, in which case this specification shall govern.

3.2 First article. When specified (see 6.3), the contractor shall furnish a sample for first article inspection and approval.

3.3 Materials.

3.3.1 Basic cloths.

3.3.1.1 Type I, class 1, cap crown. The basic cloth for the top, flares, and band pieces shall be a white cotton cloth conforming to MIL-C-29148.

3.3.1.2 Type I, class 2, cap crown. The basic cloth for the top, flares, and band pieces shall be a polyester/cotton cloth conforming to class 1 of MIL-C-29127. The cloth shall be dyed to match Khaki Shade 2101.

3.3.1.3 Type II, class 2, cap crown. The basic cloth for the top, flares, and band pieces shall be a polyester/wool tropical conforming to type III, class 1 or 3, of MIL-C-21115. The cloth shall be dyed to match Tan Shade 3729.

3.3.1.4 Type II, class 3, cap crown. The basic cloth for the top, flares, and band pieces shall be a wool gabardine conforming to type I, class 3, of MIL-C-10176. The cloth shall be dyed to match Khaki Shade 2104.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T10:24Z
Check the source to verify that this is the current version before use.

3.3.1.4.1 Lining. The basic cloth for the lining piece of the type II cap crown shall be a rayon twill cloth conforming to class 1 of MIL-C-368. The cloth shall be dyed to approximate the shade of the outer fabrics.

* 3.3.2 Tape. The reinforcement tape, when applicable, shall conform to type II, III, or IV, class 1 or 2, of DDD-B-1199. The color of the tape shall approximate the shade of the outer fabrics, and shall be cut to finish 1/2 inch in width.

* 3.3.3 Thread, cotton. The cotton thread used for seaming and stitching the cap crowns shall be bleached white or dyed to match the color of the respective cap crown, and shall conform to type IC1 or IC2, 3-ply, ticket Nos. 00 and 000, of V-T-276. As an alternate, a cotton-covered polyester thread conforming to size number 50, 3-ply of MIL-T-43548 may be substituted for the cotton threads.

* 3.3.3.1 Colorfastness. The dyed thread shall show fastness to light, laundering and wet-dry cleaning equal to or better than the standard sample when tested as specified in V-T-276 or MIL-T-43548 as applicable. When a standard sample is not available, the dyed thread shall show a minimum of "good" fastness to light, laundering and wet-dry cleaning when tested as specified in V-T-276 or MIL-T-43548, as applicable.

3.3.4 Label. Each cap crown shall have a combination identification and size label conforming to type VI, class 4, of DDD-L-20; except that the label shall bear the following inscription:

CROWN, SERVICE CAP (MAN'S)
100% COTTON 1/
CONTRACT NO.: DLA 100-00-0-0000 (Example)
STOCK NO.: 8405-00-000-0000 (Example)
SIZE: 7-1/2 (Example)
NAME OF CONTRACTOR:

1/ Applicable only for type I, class 1, cap crown. Fiber identification for other cap crowns shall be as follows:

Type I, class 2 - 50% Polyester/50% Cotton
Type II, class 2 - 60% Polyester/40% Wool
Type II, class 3 - 100% Wool

3.4 Design. The cap crowns shall consist of a circular top piece, flared sides and a band. One horizontal buttonhole shall be placed on each side of the band (see Figures 1 and 2).

3.4.1 Figures. Figures 1 and 2 are furnished for information purposes only. When inconsistencies exist between the written specification and the figure, the written specification shall govern.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T10:24Z
Check the source to verify that this is the current version before use.

3.5 Patterns. Standard patterns will be furnished by the Government to the contractor for use in cutting working patterns (see 6.3). The patterns allow 3/16 inch for seams, except where otherwise specified in Table I. The working patterns shall be identical to the Government patterns. Neither the Government patterns nor the working patterns shall be altered in any way.

3.5.1 Pattern parts. The component parts of the cap crowns shall be cut from materials as specified and in accordance with the following pattern parts:

Material	Nomenclature of pattern parts	Cut Parts
Cloth, double-plain weave, cotton, white; Cloth, polyester/cotton, twill; Cloth, polyester/wool tropical; Wool gabardine	Top	1
	Half flare (front)	1
	Quarter flare (back)	2
	Band	1
Rayon twill cloth	Top (lining) - Type II cap crown	1

3.6 Construction.

3.6.1 Stitches, seams, and stitching types. Stitch, seam, and stitching types as specified in Table I shall conform to FED-STD-751. Wherever two or more methods for seam or stitch types are given for the same part of the operation, any one of them may be used. Where stitch type 401 or 101 is used, the looper (underthread) shall be on the inside of the cap crown. Unless otherwise specified, topstitching and edgestitching shall be 1/16 inch from the edge.

3.6.2 Thread breaks and ends of seams. Ends of all seams and stitchings, when not caught in other seams or stitchings, shall be backtacked not less than 3/8 inch. The ends of a continuous line of stitching shall be overlapped not less than 1/2 inch. Thread breaks (all stitch types) shall be secured by stitching back of the break not less than 1/2 inch. Skipped stitches or 401 stitch type thread breaks may be repaired by using 301 stitch type. Where stitch type 401 or 101 is permitted as an option, it shall not be used unless the ends are caught in other seams or stitching.

3.6.3 Stitches per inch. The minimum and maximum number of stitches per inch shall be as specified in Table I.

* 3.7 Manufacturing operations requirements. The cap crowns shall be manufactured in accordance with the operation requirements specified in Table 1. The contractor is not required to follow the exact sequence of operations listed, provided the finished cap crowns are identical to those produced by following the exact sequence as shown.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T10:24Z
Check the source to verify that this is the current version before use.

3.7.1 Pressing. All pressing operations referenced in Table 1 shall be performed by using a heated pressing iron or steam pressing machine.

3.7.2 Shade and size marking. The component parts of the cap crowns shall be marked to insure a uniform shade and size throughout the cap crown. Any method may be used except:

(1) Corrosive metal fastening devices.
(2) Sew-on shade tickets.
(3) Adhesive type tickets which discolor or adhere to the material upon removal of tickets.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T10:24Z
Check the source to verify that this is the current version before use.

Table I - Construction of cap crowns

No.	Description of Operation	Stitch Type	Seam and Stitching Type	Stitches Per Inch	Thread	
					Needle	Bobbin or Looper
1.	Cutting a. The cap crowns shall be cut in strict accordance with patterns furnished, which show size, shape, directional lines for cutting, and notches for proper assembly of all component parts. b. All component outer fabric parts shall be cut from one piece of the applicable basic cloth (see 3.3.1 and 3.5.1).					
2.	Replacement of defective components During the spreading, cutting, and manufacturing process, components having material defects or damages that are classified as defects in MIL-STD-1394, shall be removed from production and replaced with non-defective and properly matched components.					
3.	Shade and size marking (see 3.7.2) a. All component parts shall be marked, ticketed, or bundled to insure uniform shade and size throughout the cap crown. b. The use of a rubber stamp or pencil is acceptable provided the numbers are legible and do not show through on the outside of the cap crown.					
4.	Make band a. Join ends of band, face to face, and stitch 1/4 (± 1/16) inch from the raw edge. Spread seam open and press flat.	301 or 401	SSz-3(a)	10-14	00 00	00 000

NCTR Form 1, 15 Sep 1967

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T10:24Z
Check the source to verify that this is the current version before use.

Table I - Construction of cap crowns (cont'd)

No.	Description of Operation	Stitch Type	Seam and Stitching Type	Stitches Per Inch	Thread	
					Needle	Bobbin or Looper
*4.	Make band (cont'd)					
	b. Double stitch 3/16 inch gauge with the seam centered between the two rows of stitching.	301 or 401	SSz-3(b)	10-14	00 00	00 000
	OR					
	c. Join ends of band, face to face, and stitch 1/4 (± 1/16) inch from the raw edge. Turn seam allowance and stitch 1/32 to 1/16 inch from the folded edge.	301 or 401	LSq-2	10-14	00 00	00 000
	d. Turn under the bottom edge of band and double stitch 3/16 to 1/4 inch gauge thru all plies with each line of stitching finishing 1/16 inch from each folded edge.	301 or 401	EFb-2	10-14	00 00	00 000
	OR					
	e. Overedge stitch the bottom raw edge of the band.	503 or 504	SSa-1	8-10	00 00	00 00
	f. Turn under the bottom edge and double stitch 3/16 to 1/4 inch gauge, with the outer line of stitching finished 1/16 inch from the bottom folded edge.	301 or 401	EFa-2	10-14	00 00	00 000
	g. Attach the label in the closing seam as specified in either sequence "b" or "c", simultaneously inserting and catching the width of one side. As an alternate, the label may be attached in the seam as specified in sequence "d" or "f" simultaneously inserting and catching the length of one side. The label shall finish approximately 1/2 to 1 inch to either side of closing seam formed in sequence "b" or "c". Regardless of the applicable method used, the label shall finish face side up with the printing clearly visible.					

NCTR Form 1, 15 Sep 1967

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T10:24Z
Check the source to verify that this is the current version before use.

Table I - Construction of cap crowns (cont'd)

No.	Description of Operation	Stitch Type	Seam and Stitching Type	Stitches Per Inch	Thread	
					Needle	Bobbin or Looper
4.	Make band (cont'd) h. The hem shall finish 5/16 (± 1/16) inch in width.					
	i. Make a horizontal buttonhole in band hem on each side of cap crown, positioned 5 1/2 (± 1/8) inches from the center front to center of buttonhole. The buttonhole shall be straight style 3/4 (± 1/16) inch in length, and positioned 1/8 to 3/16 inch from the bottom edge of hem to center of buttonhole. The ends of each buttonhole shall be securely tacked.	Buttonhole		52-54 per button-hole including tack	00	00 or None
5.	Make flare a. Join the ends of the three pieces of flare material face to face, and stitch 1/4 (± 1/16) inch from the raw edge. Spread each seam open and press flat.	301 or 401	SSz-3(a)	10-14	00 00	00 000
	b. Double stitch each seam 3/16 to 1/4 inch gauge with the seam centered between the two rows of stitching.	301 or 401	SSz-3(b)	10-14	00 00	00 000
	OR					
	c. Join the ends of the three pieces of flare material face to face, and stitch 1/4 (± 1/16) inch from the raw edge. Turn each seam allowance to the same side and stitch 1/32 to 1/16 inch from the folded edge.	301 or 401	LSq-2	10-14	00 00	00 000
*6.	Join flare to top piece a. Join flare to top piece, face to face, and stitch 1/4 (± 1/16) inch from the raw edge. Spread seam open and press flat, with the flare seams centered at each side and at center back.	301 or 401	SSa-1	10-14	00 00	00 000

NCTR Form 1, 15 Sep 1967

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T10:24Z
Check the source to verify that this is the current version before use.

Table I - Construction of cap crowns (cont'd)

No.	Description of Operation	Stitch Type	Seam and Stitching Type	Stitches Per Inch	Thread	
					Needle	Bobbin or Looper
*6.	Join flare to top piece (cont'd) b. Position and center the bias cut reinforcement tape (see 3.3.2) over the entire length of the flare/top piece joining seam. The raw edges of the tape may be turned under. Turn under the end of tape 1/4 to 1/2 inch and double stitch 3/16 to 1/4 inch gauge thru all plies finishing at center back, overlapping the tape not less than 1-1/2 inches. c. The reinforcement tape shall finish 1/2 (± 1/16) inch in width.	301 or 401	SSad-3	10-14	00 00	00 000
	OR					
	d. Join flare to top piece, face to face, and stitch 1/4 (± 1/16) inch from the raw edge with the flare seams centered at each side and at center back.	301 or 401	SSa-1	10-14	00 00	00 000
	e. Overedge seam allowances together.	503 or 504	SSa-1	8-10	00	00
	OR					
	f. Operations "d" and "e" may be performed in one operation by simultaneously stitching and overedging.	515 or 516 or 517 or 518	LSbm-3(a)	8-10	00	00
	g. Turn overedged seam allowances toward flares, and stitch 1/32 to 1/16 inch from the folded edge.	301 or 401	LSbm-3(b)	10-14	00 00	00 000

NCTR Form 1, 15 Sep 1967

Source: https://assist.dla.mil - Downloaded: 2026-10-18T10:24Z
Check the source to verify that this is the current version before use.

Table I - Construction of cap crowns (cont'd)

No.	Description of Operation	Stitch Type	Seam and Stitching Type	Stitches Per Inch	Thread	
					Needle	Bobbin or Looper
7.	Attach lining (Type II Cap Crowns Only) Stitch the lining to the top piece 3/16 (± 1/16) inch from the raw edge, prior to joining the flare to the top piece. The sequence of operation 6 shall then be followed in joining the flare to the top piece. See figure 2.	301 or 401	SSa-1 See Figure 2	10-14	00 00	00 000
8.	Join band to flare a. Join the top edge of band to flare, face to face, and stitch 1/4 (± 1/16) inch from the raw edge.	301 or 401	SSa-1	10-14	00 00	00 000
	b. Overedge seam allowances together.	503 or 504	SSa-1	8-10	00	00
	OR					
	c. Operations "a" and "b" may be performed in one operation by simultaneously stitching and overedging.	515 or 516 or 517 or 518	SSa-2	8-10	00	00
	d. The flare shall finish 2-1/4 (± 1/8) inches in width at center of front and 2 (± 1/8) inches in width at center of back.					
	e. The band shall finish 1-1/2 (± 1/8) inches in width.					
9.	Finishing a. Trim ends of stitching and remove all loose thread.					
	b. Remove all spots, stains, and shade tickets.					

NCTR Form 1, 15 Sep 1967

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T10:24Z
Check the source to verify that this is the current version before use.

Table I - Construction of cap crowns (cont'd)

No.	Description of Operation	Stitch Type	Seam and Stitching Type	Stitches Per Inch	Thread	
					Needle	Bobbin or Looper
*10	Blocking a. Each cap crown shall be securely positioned over the properly sized five piece wooden block furnished by the contractor. b. Insert each blocked cap crown into a heated steam oven for approximately 5 minutes, with the temperature of the oven properly controlled. c. Upon removal of the cap crowns from the blocks and prior to inserting into polyethylene bags, the cap crowns shall be placed on a suitable rack or equivalent and thoroughly air dried. NOTE: The contractor may press the blocked cap crown before or after removal from the heated steam oven to assure a wrinkle free cap crown (see 3.7.1).					

NCTR Form 1, 15 Sep 1967

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T10:24Z
Check the source to verify that this is the current version before use.

3.8 Measurements. The finished cap crown shall conform to the measurements as shown in Table II. The measurements and tolerances shall be expressed in inches.

Table II - Finished measurements

Head size	Band circumference 1/
6-1/2	22-1/2
6-5/8	22-7/8
6-3/4	23-1/4
6-7/8	23-5/8
7	24
7-1/8	24-3/8
7-1/4	24-3/4
7-3/8	25-1/8
7-1/2	25-1/2
7-5/8	25-7/8
7-3/4	26-1/4
7-7/8	26-5/8
8	27
Tolerance	± 1/4

1/ The band circumference shall be measured by folding the band in half so that the outer edges are even with each other, and multiplying the result by two.

3.9 Workmanship. The finished cap crowns shall conform to the quality established by this specification. The occurrence of defects shall not exceed the applicable point values specified in MIL-STD-1394.

4. QUALITY ASSURANCE PROVISIONS

4.1 Responsibility for inspection. Unless otherwise specified in the contract, the contractor is responsible for the performance of all inspection requirements as specified herein. Except as otherwise specified in the contract, the contractor may use his own or any other facilities suitable for the performance of the inspection requirements specified herein unless disapproved by the Government. The Government reserves the right to perform any of the inspections set forth in the specification where such inspections are deemed necessary to assure supplies and services conform to prescribed requirements.

4.1.1 Certificate of compliance. Where certificates of compliance are submitted, the Government reserves the right to check test such items to determine the validity of the certification.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T10:24Z
Check the source to verify that this is the current version before use.

4.2 First article inspection. When required, the first article submitted in accordance with 3.2, shall be inspected as specified in 4.3.2 and 4.3.3 for compliance with design, construction, workmanship and dimensional requirements.

4.3 Inspection Inspection shall be performed in accordance with MIL-STD-105, except where otherwise indicated in MIL-STD-1394.

4.3.1 Component and material inspection. In accordance with 4.1 above, components and material shall be tested in accordance with all the requirements of referenced specifications, drawings, and standards unless otherwise excluded, amended, modified, or qualified in this specification or applicable purchase document.

4.3.2 Examination of the end item. The end item examination of the finished cap crowns shall be as specified in MIL-STD-1394.

4.3.3 Dimensional examination. The dimensional examination of the finished cap crowns shall be as specified in MIL-STD-1394.

4.3.4 Examination of packaging requirements. The examination to determine compliance with packaging, packing, and marking requirements shall be as specified in MIL-STD-1394.

5. PACKAGING

5.1 Preservation-packaging. Preservation packaging shall be level A or C as specified (see 6.2).

5.1.1 Level A. Each cap crown shall be inserted flat in a clear polyethylene film bag of 0.00125 inch thickness (± 25% tolerance) that has been formed with heat sealed seams. The bag may also be fabricated from polyethylene film tubing or sheeting. The final closure of the bag shall be heat sealed with the heat seal made as close as possible to the open end. A 1/4 inch diameter hole shall be made at one corner of the polyethylene bag to allow excess air to escape. As an alternate, the final closure of the polyethylene bag may be accomplished by means of a tuck or reverse flap in which a heat sealed closure and corner hole are not required.

5.1.2 Level C (Commercial Packaging). Cap crowns shall be packaged to afford adequate protection against deterioration and physical damage during shipment from the contractor to the first receiving activity. The package and the quantity per package shall be the same as that normally used by the contractor for retail distribution.

* 5.2 Packing. Packing shall be level A, B, or C as specified (see 6.2).

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T10:24Z
Check the source to verify that this is the current version before use.

5.2.1 Level A. Forty (40) type I, class 1, cap crowns; or seventy (70) type 1, class 2, cap crowns; or fifty (50) type II, class 2 cap crowns; or forty (40) type II, class 3, cap crowns; of one size only and packaged as specified in 5.1, shall be packed in a snug-fitting, fiberboard shipping container conforming to type SF, class weather-resistant, grade V2s, style RSC-L, of PPP-B-636. The inside of each shipping container shall be fitted with a box liner conforming to type CF, class weather-resistant, variety DW, grade V15c, of PPP-B-636. Level A packages shall be packed as follows:

1. When the type I, class 1, or type II, class 3, cap crowns are applicable, the cap crowns shall be packed flat within a shipping container two in length, one in width, and twenty in depth.

2. When the type I, class 2, cap crowns are applicable, the cap crowns shall be packed flat within a shipping container, two in length, one in width, and thirty-five in depth.

3. When the type II, class 2, cap crowns are applicable, the cap crowns shall be packed flat within a shipping container two in length, one in width, and twenty five in depth.

NOTE: The inside length, width, and depth dimensions of the shipping container shall be appropriate to allow the cap crowns to be packed with a minimum amount of compression.

Each container shall have the contents completely covered on the top and bottom with a sheet of commercial grade kraft paper, closed in accordance with Method III, and reinforced in accordance with the appendix of PPP-B-636. Toward the end of the contract, or when there are less than the required amount of the same size, mixed sizes may be packed within the same shipping container.

5.2.2 Level B. Forty (40) type I, class 1, cap crowns; or seventy (70) type I, class 2, cap crowns; or fifty (50) type II, class 2, cap crowns; or forty (40) type II, class 3, cap crowns; of one size only and packed as specified in 5.1, shall be packed in snug-fitting fiberboard shipping container conforming to style RSC, type CF, class domestic, variety DW, grade 200, of PPP-B-636. Level B packages shall be packed as outlined in sections 1, 2 and 3 of 5.2.1. Each container shall have the contents completely covered on the top and bottom with a sheet of commercial grade kraft paper and shall be closed in accordance with Method II as specified in the appendix of PPP-B-636. Toward the end of the contract, or when there are less than the required amount per container of the same size, mixed sizes may be packed within the same shipping container.

5.2.2.1 Weather-resistant fiberboard container. When specified (see 6.2), the shipping container shall be a grade V3c, W5c or W6c fiberboard box fabricated in accordance with PPP-B-636 and closed in accordance with Method III as specified in the appendix of the box specification.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T10:24Z
Check the source to verify that this is the current version before use.

5.2.3 Level C (Commercial Packing). Cap crowns, packaged as specified in 5.1, shall be packed in a manner to insure carrier acceptance and safe delivery at destination at the lowest transportation rate for such deliveries. The quantity per shipping container shall be the same as that normally used by the contractor for retail distribution. Containers shall comply with the U.S. Postal Service Manual, Uniform Freight Classification Rules, or National Motor Freight Classification Rules, as applicable.

5.3 Marking. In addition to any special marking required by the contract, shipping containers shall be marked in accordance with MIL-STD-129.

5.3.1 Polyethylene bagged packages. Polyethylene bagged packages shall have the required information legibly printed or stamped in black directly on the bag across the center face or on a white paper label inserted within the bag so as to permit ready identification. The bag or label shall indicate the following information:

NOMENCLATURE
TYPE AND CLASS
STOCK NO.
SIZE
QUANTITY

5.3.2 Label, mixed sizes. Each shipping container packed with mixed sizes shall have securely attached to the end and side, directly under the printing or stenciling, a white paper label 5 by 4 inches with the words "MIXED SIZES" plainly printed thereon and under these words shall be legibly printed the correct quantity and sizes contained therein.

6. NOTES

6.1 Intended use. The cap crowns covered by this specification are intended for use as covers for service cap frames used by male personnel of the Navy and Coast Guard.

6.2 Ordering data. Procurement documents should specify the following:

a. Title, number, and date of this specification.
b. Type, class, and size required (see 1.2).
c. Whether first article sample is required (see 3.2).
d. Selection of applicable levels of packaging and packing (see 5.1 and 5.2).
e. When weather-resistant grade fiberboard shipping containers are required for level B packing (see 5.2.2.1).

6.3 Samples and patterns. For access to samples and patterns, address the procuring activity issuing the invitation for bids.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T10:24Z
Check the source to verify that this is the current version before use.

6.4 Metric conversion. The following multiplying factors are supplied for converting inch measurements found within this specification to the metric equivalent:

Inches to millimeters - multiply inches by 25.4
Inches to centimeters - multiply inches by 2.54

6.5 Changes from previous issue. The margins of this specification are marked with an asterisk to indicate where changes (additions, modifications, corrections, deletions) from the previous issue were made. This was done as a convenience only and the Government assumes no liability whatsoever for any inaccuracies in these notations. Bidders and contractors are cautioned to evaluate the requirements of this document based on the entire content irrespective of the marginal notations and relationship to the last previous issue.


Custodian:
Navy - NU

User Activity:
Navy - CG

Preparing activity:
Navy - NU

Project No. 8405-N708

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T10:24Z
Check the source to verify that this is the current version before use.

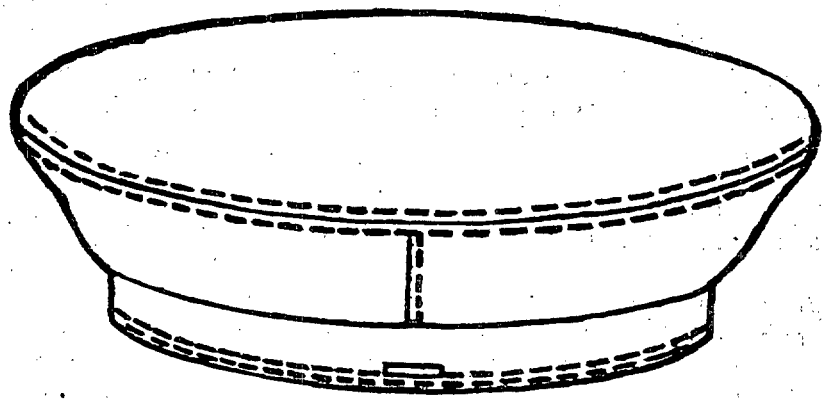

SEAM TYPE PER CONSTRUCTION OPERATIONS 6 AND 7 OF TABLE I



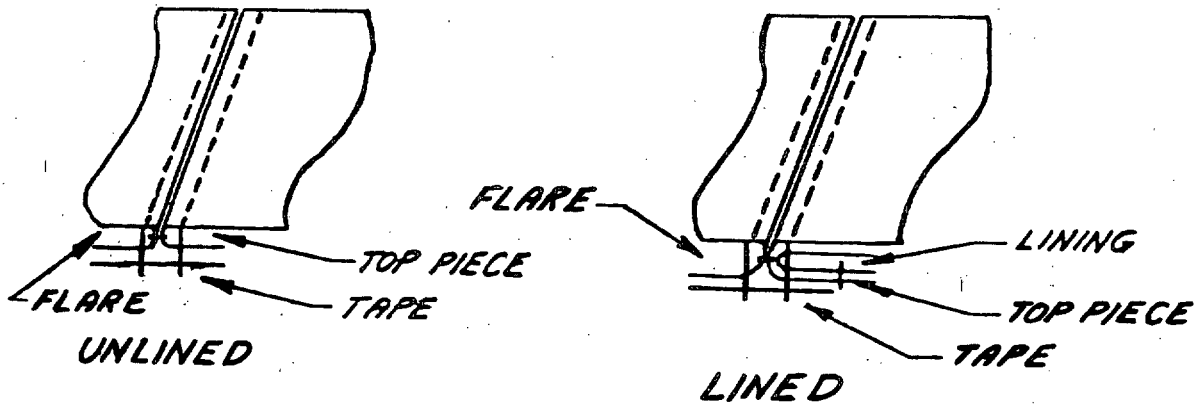


FIGURE 1 - CROWN, SERVICE CAP (MAN'S)


Source: https://assist.dla.mil -- Downloaded: 2026-10-18T10:24Z
Check the source to verify that this is the current version before use.

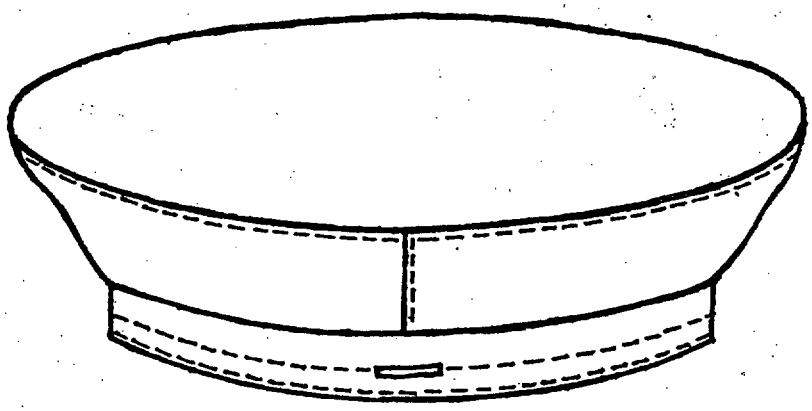

ALTERNATE SEAM TYPE

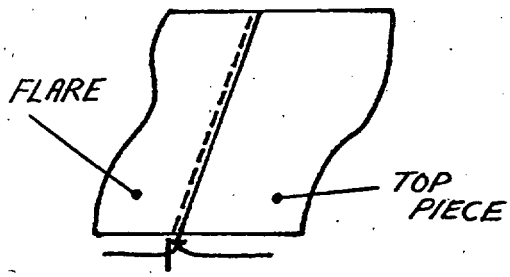

UNLINED

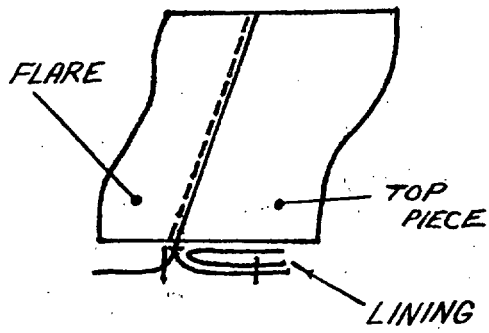

LINED

FIG. 2 - CROWN, SERVICE CAP (MAN'S)

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T10:24Z
Check the source to verify that this is the current version before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

INSTRUCTIONS: This form is provided to solicit beneficial comments which may improve this document and enhance its use. DoD contractors, government activities, manufacturers, vendors, or other prospective users of the document are invited to submit comments to the government. Fold on lines on reverse side, staple in corner, and send to preparing activity. Attach any pertinent data which may be of use in improving this document. If there are additional papers, attach to form and place both in an envelope addressed to preparing activity. A response will be provided to the submitter, when name and address is provided, within 30 days indicating that the 1426 was received and when any appropriate action on it will be completed.
NOTE: This form shall not be used to submit requests for waivers, deviations or clarification of specification requirements on current contracts. Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document(s) or to amend contractual requirements.

DOCUMENT IDENTIFIER *(Number)* AND TITLE

MIL-C-17620E(NU) CROWN, SERVICE CAP (MAN'S)

NAME OF ORGANIZATION AND ADDRESS OF SUBMITTER

☐ VENDOR ☐ USER ☐ MANUFACTURER

1. ☐ HAS ANY PART OF THE DOCUMENT CREATED PROBLEMS OR REQUIRED INTERPRETATION IN PROCUREMENT USE? ☐ IS ANY PART OF IT TOO RIGID, RESTRICTIVE, LOOSE OR AMBIGUOUS? PLEASE EXPLAIN BELOW.

A. GIVE PARAGRAPH NUMBER AND WORDING

B. RECOMMENDED WORDING CHANGE

C. REASON FOR RECOMMENDED CHANGE(S)

2. REMARKS

SUBMITTED BY *(Printed or typed name and address — Optional)*

TELEPHONE NO.

DATE

DD FORM 1426 1 OCT 76

Replaces edition of 1 Jan 72 which may be used.

S/N 0102-LF-001-4260

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T10:24Z
Check the source to verify that this is the current version before use.

FOLD

DEPARTMENT OF THE NAVY

OFFICIAL BUSINESS
PENALTY FOR PRIVATE USE $300

NO POSTAGE
NECESSARY
IF MAILED
IN THE
UNITED STATES

BUSINESS REPLY MAIL

FIRST CLASS PERMIT NO. 12503 WASHINGTON D. C.

POSTAGE WILL BE PAID BY THE DEPARTMENT OF THE NAVY

Officer in Charge
Navy Clothing & Textile Research Facility
21 Strathmore Road
Natick, MA 01760

FOLD

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T10:24Z
Check the source to verify that this is the current version before use.