INCH-POUND

MIL-C-17620F(NU)
28 March 1990
SUPERSEDING
MIL-C-17620E(NU)
2 September 1981

MILITARY SPECIFICATION

CROWN, SERVICE CAP (MAN'S)

This specification is approved for use by the Navy Clothing and Textile Research Facility, Department of the Navy, and is available for use by all Departments and Agencies of the Department of Defense.

1. SCOPE

1.1 Scope. This specification covers the requirements for men's cap crowns.

* 1.2 Classification. The cap crowns shall be procured in the following types, classes, and sizes as specified (see 6.2).

* Type I - Unlined

Class 1 - Polyester/Cotton, White 3053
Class 2 - Polyester/Cotton, Khaki 3729

Type II - Lined

Class 4 - Wool Elastique, Green 2212

Schedule of sizes	
6-1/2	7-1/4
6-5/8	7-3/8
6-3/4	7-1/2
6-7/8	7-5/8
7	7-3/4
7-1/8	7-7/8
	8

Beneficial comments (recommendations, additions, deletions) and any pertinent data which may be of use in improving this document should be addressed to: Officer in Charge, Navy Clothing and Textile Research Facility, 21 Strathmore Road, Natick, MA 01760-2490 by using the self-addressed Standardization Document Improvement Proposal (DD Form 1426) appearing at the end of this document or by letter.

AMSC N/A FSC 8405

DISTRIBUTION STATEMENT A. Approved for public release, distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T10:24Z
Check the source to verify that this is the current version before use.

2. APPLICABLE DOCUMENTS

* 2.1 Government documents.

* 2.1.1 Specifications, standards, and handbooks. The following specifications, standards, and handbooks form a part of this document to the extent specified herein. Unless otherwise specified, the issues of these documents shall be those listed in the issue of the Department of Defense Index of Specifications and Standards (DoDISS) and supplement thereto, cited in the solicitation (see 6.2).

SPECIFICATIONS

FEDERAL

V-T-276	- Thread, Cotton
NN-P-71	- Pallet, Material, Handling, Wood Stringer Construction, 2 Way and 4 Way (Partial)
DDD-B-1199	- Binding, Textile, Cotton, Bias-Cut
DDD-L-20	- Label; for Clothing, Equipage, and Tentage (General Use)
PPP-B-636	- Boxes, Shipping, Fiberboard

MILITARY

MIL-C-368	- Cloth, Satin, Rayon and Cloth, Twill, Rayon
MIL-C-3738	- Cloth, Elastique, Wool
MIL-P-15011	- Pallets, Material Handling, Wood Post Construction, 4 Way Entry
MIL-C-24927	- Cloth, Twill, Polyester/Cotton (Durable Press)
MIL-T-43548	- Thread, Polyester Core: Cotton-, Rayon-, or Polyester-Covered
MIL-C-44121	- Cloth, Twill, Polyester

STANDARDS

FEDERAL

FED-STD-191	- Textile Test Methods
FED-STD-751	- Stitches, Seams, and Stitchings

MILITARY

MIL-STD-105	- Sampling Procedures and Tables for Inspection by Attributes
MIL-STD-129	- Marking for Shipment and Storage
MIL-STD-147	- Palletized Unit Loads
MIL-STD-1394	- Provisions for Evaluating Quality of Cap Crowns
MIL-STD-2073-1	- DoD Materials Procedures Development and Application of Packaging Requirements
MIL-STD-2073-2	- Packaging Requirement Codes

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T10:24Z
Check the source to verify that this is the current version before use.

(Unless otherwise indicated, copies of federal and military specifications, standards and handbooks are available from the Standardization Documents Order Desk, Bldg. 4D, 700 Robbins Avenue, Philadelphia, PA 19111-5094.)

2.1.2 Other Government documents, drawings and publications. The following other Government documents, drawings and publications form a part of this document to the extent specified herein. Unless otherwise specified, the issues are those cited in the solicitation.

U.S. POSTAL MANUAL

(Copies of the manual may be obtained from the Superintendent of Documents, U.S. Government Printing Office, Washington, DC 20402-0001.)

* 2.2 Non-Government publications. The following document(s) form a part of this document to the extent specified herein. Unless otherwise specified, the issues of the documents which are DoD adopted shall be those listed in the issue of the DoDISS cited in the solicitation. Unless otherwise specified, the issues of documents not listed in the DoDISS are the issues of the documents cited in the solicitation (see 6.2).

NATIONAL MOTOR FREIGHT TRAFFIC ASSOCIATION, INC., AGENT

National Motor Freight Classification

(Applications for copies should be addressed to the American Trucking Association, ATTN: Traffic Department, 1616 P Street, N.W., Washington, DC 20036-1404.)

UNIFORM CLASSIFICATION COMMITTEE, AGENT

Uniform Freight Classification

(Applications for copies should be addressed to the Uniform Classification Committee, Room 1106, 222 South Riverside Plaza, Chicago, Illinois 60606-5808.)

(Non-Government standards and other publications are normally available from the organizations that prepare or distribute the documents. These documents also may be available in or through libraries or other informational services.)

* 2.3 Order of precedence. In the event of a conflict between the text of this document and the references cited herein, the text of this document takes precedence. Nothing in this document however, supersedes applicable laws and regulations unless a specific exemption has been obtained.

3. REQUIREMENTS

3.1 Guide sample. Samples, when furnished, are solely for guidance and information to the contractor (see 6.3). Variations from this specification may appear in the sample in which case this specification shall govern.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T10:24Z
Check the source to verify that this is the current version before use.

* 3.2 First article. When specified (see 6.2), a sample shall be subjected to first article inspection in accordance with 4.3.

3.3 Material.

3.3.1 Basic cloths.

* 3.3.1.1 Type I, class 1, cap crown. The basic cloth used for the top, flares and band pieces shall be a polyester/cotton cloth conforming to MIL-C-24927. The color shall match White Shade 3053.

* 3.3.1.2 Type I, class 2, cap crown. The basic cloth used for the top, flares and band pieces shall be a polyester/cotton cloth conforming to MIL-C-24927 except that the color shall be Khaki Shade 3729.

* 3.3.1.3 Type II, class 4, cap crown. The basic cloth used for the top, flares and band pieces shall be a wool elastique cloth conforming to type I of MIL-C-3738. The cloth shall be dyed to match Green Shade 2212.

* 3.3.1.3.1 Lining. The basic cloth used for the lining piece of the type II cap crown shall be a rayon twill cloth conforming to class 1 of MIL-C-368. As an alternate, material conforming to MIL-C-44121 may be used. The cloth shall be dyed to approximate the shade of the outer fabric.

3.3.2. Tape. The reinforcement tape, when applicable, shall conform to type II, III, or IV, classes 1 or 2, of DDD-B-1199. The color of the tape shall approximate the shade of the outer fabrics and shall be cut to finish 1/2 inch in width.

* 3.3.3 Thread, polyester core. The thread for seaming and stitching the cap crowns shall be a cotton-covered or rayon-covered thread conforming to 2 or 3-ply, ticket number 50 of MIL-T-43548. The polyester-core, polyester-covered thread is not allowed. As an alternate, the thread for seaming and stitching the cap crowns shall be cotton thread conforming to type IC1 or IC2, 3-ply, ticket Nos. 00, 000 or A of V-T-276. The thread shall be bleached white (class 1 only) or dyed to match the shade of the respective cap crown.

* 3.3.3.1 Colorfastness. The finished thread shall show colorfastness to light, laundering, wet/dry cleaning and perspiration equal to or better than the standard sample when tested as specified in MIL-T-43548 or V-T-276 as applicable. As a limit of acceptability or when no standard sample is available, the finished thread shall show a minimum of "good" fastness to light, laundering, wet/dry cleaning and perspiration when tested as specified in MIL-T-43548 or V-T-276 as applicable.

* 3.3.4 Label. Each cap crown shall have a combination identification-size label conforming to type VI, class 4 of DDD-L-20, except that the label shall bear the following inscription:

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T10:24Z
Check the source to verify that this is the current version before use.

CROWN, SERVICE CAP (MAN'S)
FIBER CONTENT: 65% POLYESTER/35% COTTON (EXAMPLE)
CONTRACT NO: DLA-100-00-0-0000 (EXAMPLE)
STOCK NO: 8405-00-000-0000 (EXAMPLE)
SIZE: 7 1/2 (EXAMPLE)
NAME OF CONTRACTOR:
NAME OF MANUFACTURER: (IF OTHER THAN CONTRACTOR)

LAUNDERING INSTRUCTIONS

For Type I only:

MACHINE WASH WARM, PERMANENT PRESS CYCLE
TUMBLE DRY, MEDIUM SETTING
REMOVE PROMPTLY

DO NOT USE CHLORINE BLEACH

OR

Follow NAVEDTRA Manual 414-01-45-81 Formula II

For Type II only

DRY CLEAN ONLY

3.4 Design. The cap crowns shall consist of a circular top piece, flared sides and a band. One horizontal buttonhole shall be placed on each side of the band (see Figures 1 and 2).

3.4.1 Figures. Figures 1 and 2 are furnished for information purposes only. When inconsistencies exist between the written specification and the figures, the written specification shall govern.

* 3.5 Patterns. Standard patterns shall be furnished by the government to the contractor for use in cutting working patterns (see 6.3). The patterns allow 3/16 inch for seam allowances, except where otherwise specified in Table I. The working patterns shall be identical to the Government patterns. Neither the Government patterns nor the working patterns shall be altered in any way, except that additional notches for use during construction are allowed on the working patterns. Also, minor modifications are permitted where necessary when using automatic equipment. These modifications shall not alter the dimensional, serviceability or appearance requirements cited in the specification.

* 3.5.1 Pattern parts. The component parts of the cap crowns shall be cut from materials as specified and in accordance with the following pattern parts:

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T10:24Z
Check the source to verify that this is the current version before use.

Material	Nomenclature of pattern parts	Cut parts
Applicable base fabric	Top	1
	Half flare (front)	1
	Quarter flare (back)	2
	Band	1
Lining	Top (lining) - Type II cap crown	1

3.6 Construction.

* 3.6.1 Stitches, seams, and stitching. Stitch, seam, and stitching types specified in Table I shall conform to FED-STD-751. Whenever two or more methods for seams, or stitches are given for the same operation, any one of them may be used. Seam allowances shall be maintained with seams sewn so that no raw edges, runoffs, twists, pleats, puckers or open seams result. All seams shall start and finish evenly. Thread tension shall be maintained so that there is no tight or loose stitching. Where stitch type 401 is used, the chain or looper (underthread) shall be on the inside of the cap crown. Ends of all seams produced by stitch type 401 shall be caught in other seams or stitching. Unless otherwise specified, topstitching and edgestitching shall be 1/16 inch from the edge. The bight of the overedge stitching shall be 3/16 inch. The guide and knife shall be set to trim only the ravelled ends of the fabric.

3.6.2 Stitches per inch. The minimum and maximum number of stitches per inch shall be as specified in Table I.

* 3.6.3 Thread breaks and ends of seams. Unless otherwise specified in Table I, ends of all seams and stitching, when not caught in other seams or stitching, shall be backtacked not less than 1/4 inch. The ends of a continuous line of stitching shall be overlapped not less than 1/2 inch. Thread breaks (all stitch types) shall be secured by stitching back of break not less than 1/2 inch. Skipped stitches or 401 stitch type thread breaks may be repaired by using 301 stitch type.

* 3.7 Manufacturing operations requirements. The cap crowns shall be manufactured in accordance with operation requirements specified in Table I. The contractor is not required to follow the exact sequence of operations, provided the finished cap crowns are identical to those produced by following the exact sequence as shown. Minor modifications are permitted where necessary when using automatic equipment. These modifications shall not alter the dimensional, serviceability or appearance requirements cited in the specification.

3.7.1 Pressing. All pressing operations referenced in Table I shall be performed by using a heated pressing iron or steam pressing machine.

* 3.7.2 Shade and size marking. The component parts of the cap crowns shall be marked or ticketed to insure a uniform shade and size throughout the cap crown. Any method may be used except:

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T10:24Z
Check the source to verify that this is the current version before use.

(1) Corrosive metal fastening devices
(2) Sew-on shade tickets
(3) Adhesive type tickets which discolor or adhere to the material upon removal of tickets.

* 3.8 Abbreviations in table of operations. The abbreviations used in Table I are as follows:

Stch	-	Stitch
in	-	inch
Ndl	-	Needle
Bob	-	Bobbin
Lpr	-	Looper
Mchne	-	Machine
Btnhl	-	Buttonhole
incl	-	including

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T10:24Z
Check the source to verify that this is the current version before use.

TABLE I - CONSTRUCTION OF CAP CROWNS

NO.	OPERATION	STCH TYPE	SEAM/ STCH TYPE	STCH IN	THREAD NDL	THREAD BOB/ LPR
1.	Cutting.					
	a. Cut the component parts of the cap crown in strict accordance with patterns furnished, which show size, shape, directional lines for cutting and notches for assembly of all parts.					
	b. All component parts cut from basic material or lining (Type II only) shall be from one piece of material. Ends shall not be used.					
	c. The component parts cut from the basic material or lining (Type II only) shall finish with the face side of the material on the outside.					
2.	Replacement of defective components. During the cutting and manufacturing operations, components having material defects or damages that are classified as defects in Section 4, shall be removed from production and replaced with non-defective and properly matched components.					
3.	Shade and size marking (see 3.7.2).					
*	a. The use of a rubber stamp or pencil is acceptable provided the numbers are legible and do not show through on the outside of the cap crown.					
4.	Make band.					
	a. Join ends of band, face to face and stitch 1/4 (± 1/16) inch from the raw edge. Spread seam open and press flat.	301 or 401	SSz-3(a)	10-14	50 50	50 70
	b. Double stitch 3/16 inch gauge with the seam centered between the two rows of stitching.	301 or 401	SSz-3(b)	10-14	50 50	50 70
	or					
*	c. As an alternate to operations 4a and b, join ends of band, face to face and stitch 1/4 (± 1/16) inch from the raw edge. Turn seam allowance and stitch 1/16 inch from the folded edge through all plies.	301 or 401	LSq-2	10-14	50 50	50 70

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T10:24Z
Check the source to verify that this is the current version before use.

TABLE I - CONSTRUCTION OF CAP CROWNS

NO.	OPERATION	STCH TYPE	SEAM/ STCH TYPE	STCH IN	THREAD, NDL	THREAD, BOB/ LPR
*	d. Turn under the bottom edge of band 5/16 (+ 1/16) inch and double stitch 3/16 to 1/4 inch gauge through all plies with each line of stitching finishing 1/16 inch from each folded edge.	301 or 401	EFb-2	10-14	50 50	50 70
	or					
	e. Overedge stitch the bottom raw edge of the band.	503 504 or 602	SSa-1	8-10	50	50
*	f. Turn under the bottom edge 5/16 (+ 1/16) inch and double stitch 3/16 to 1/4 inch gauge with the outer line of stitching finishing 1/16 inch from the bottom folded edge.	301 or 401	EFa-2	10-14	50 50	50 70
	g. Attach the label in the closing seam as specified in either sequence 4a or 4c, simultaneously inserting and catching the width of one side. As an alternate, the label may be attached in the seam as specified in sequence 4d or 4f, simultaneously inserting and catching the length of one side. The label shall finish approximately 1/2 to 1 inch to either side of the closing seam formed in sequence 4a or 4c. Regardless of the applicable method used, the label shall finish face side up with the printing clearly visible.					
	h. Make a horizontal buttonhole in band hem on each side of cap crown, positioned 5 1/2 (+ 1/8) inches from the center front to the center of buttonhole. The buttonhole shall be straight style 3/4 (+ 1/16) inch in length and positioned 1/8 to 3/16 inch from the bottom edge of hem to center of buttonhole. The ends of each buttonhole shall be securely tacked.	Btnhl		52-54 per Btnhl including tack	50	50 or none
5.	Make flare.					
	a. Join the ends of the three pieces of flare material face to face and stitch 1/4 (+ 1/16) inch from the raw edge. Spread each seam open and press flat.	301 or 401	SSz-3(a)	10-14	50 50	50 70

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T10:24Z
Check the source to verify that this is the current version before use.

TABLE I - CONSTRUCTION OF CAP CROWNS

NO.	OPERATION	STCH TYPE	SEAM/ STCH TYPE	STCH IN	THREAD NDL	THREAD BOB/ LPR
	b. Double stitch each seam 3/16 to 1/4 inch gauge with the seam centered between the two rows of stitching.	301 or 401	SSz-3(b)	10-14	50 50	50 70
	or					
*	c. As an alternate to operations 5a and b, join the ends of the three pieces of flare material face to face and stitch 1/4 (± 1/16) inch from the raw edge. Turn each seam allowance to the same side and stitch 1/16 inch from the folded edge, through all plies.	301 or 401	LSq-2	10-14	50 50	50 70
6.	Join flare to top piece.					
	a. Join flare to top piece, face to face and stitch 1/4 (± 1/16) inch from the raw edge. Spread seam open and press flat, with the flare seams centered at each side and at center back.	301 or 401	SSa-1	10-14	50 50	50 70
	b. Position and center the bias cut reinforcement tape (see 3.3.2) over the entire length of the flare/top piece joining seam. The raw edges of the tape may be turned under. Turn under the end of tape 1/4 to 1/2 inch and double stitch 3/16 to 1/4 inch gauge through all plies finishing at center back, overlapping the tape not less than 1 1/2 inches.	301 or 401	SSad-3(b)	10-14	50 50	50 70
	c. The reinforcement tape shall finish 1/2 (± 1/16) inch in width.					
	or					
	d. Join flare to top piece, face to face and stitch 1/4 (± 1/16) inch from the raw edge with the flare seams centered at each side and at center back.	301 or 401	SSa-1	10-14	50 50	50 70
	e. Overedge seam allowances together.	503 504 or 602	SSa-1	8-10	50	50
	or					
	f. Operations 6d and 6e may be performed in one operation by simultaneously stitching and overedging.	515 or 516 or 519	LSbm-3(a)	8-10	50	50

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T10:24Z
Check the source to verify that this is the current version before use.

TABLE I - CONSTRUCTION OF CAP CROWNS

NO.	OPERATION	STCH TYPE	SEAM/ STCH TYPE	STCH IN	THREAD NDL	THREAD BOB/ LPR
*	g. Turn overedged seam allowances toward flares and stitch 1/16 inch from the folded edge.	301 or 401	LSbm-3 (b)	10-14	50 50	50 70
7.	Attach lining (Type II cap crowns only). Stitch the lining to the top piece 3/16 (± 1/16) inch from the raw edge, prior to joining the flare to the top piece. The sequence of operation 6 shall then be followed in joining the flare to the top piece. (See Figure 2).	301 or 401	SSa-1	10-14	50 50	50 70
8.	Join band to flare. a. Join the top edge of band to flare, face to face and stitch 1/4 (± 1/16) inch from the raw edge.	301 or 401	SSa-1	10-14	50 50	50 70
	b. Overedge seam allowances together.	503 504 or 602	SSa-1	8-10	50	50
	or					
	c. Operations 8a and 8b may be performed in one operation by simultaneously stitching and overedging.	515 516 or 519	SSa-1	8-10	50	50
	d. The flare shall finish 2 1/4 (± 1/8) inches in width at center of front and 2 (± 1/8) inches in width at center of back.					
	e. The band shall finish 1 1/2 (± 1/8) inches in width.					
9.	Finishing. a. Trim ends of stitching and remove all loose thread.					
	NOTE: Care shall be taken when trimming thread ends that damage to the fabric does not result.					
	b. Remove all spots, stains and shade tickets.					
10.	Blocking. a. Each cap crown shall be securely positioned over the properly sized five piece wooden block furnished by the contractor.					
	b. Insert each blocked cap crown into a					

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T10:24Z
Check the source to verify that this is the current version before use.

TABLE I - CONSTRUCTION OF CAP CROWNS

NO.	OPERATION	STCH TYPE	SEAM/ STCH TYPE	STCH IN	THREAD NDL BOB/ LPR
	heated steam oven for approximately 5 minutes, with the temperature of the oven properly controlled.				
	c. Upon removal of the cap crowns from the blocks and prior to inserting into polyethylene bags, the cap crowns shall be placed on a suitable rack or equivalent to thoroughly air dry.				
	NOTE: The contractor may press the blocked cap crown before or after removal from the heated steam oven to assure a wrinkle free cap crown (see 3.7.1).				

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T10:24Z
Check the source to verify that this is the current version before use.

3.8 Measurements. The finished cap crowns shall conform to the measurements as shown in Table II. The measurements and tolerances shall be expressed in inches.

Table II - Sizes and finished measurements

Head Size	Band Circumference 1/
6-1/2	22-1/2
6-5/8	22-7/8
6-3/4	23-1/4
6-7/8	23-5/8
7	24
7-1/8	24-3/8
7-1/4	24-3/4
7-3/8	25-1/8
7-1/2	25-1/2
7-5/8	25-7/8
7-3/4	26-1/4
7-7/8	26-5/8
8	27
Tolerance:	± 1/4

1/ The band circumference shall be measured by folding the band along center back seam to center front of band, measuring from folded edge to folded edge, and multiplying the result by two.

3.9 Workmanship. The finished cap crowns shall conform to the quality established by this specification. The occurrence of defects shall not exceed the applicable point values specified in MIL-STD-1394.

4. QUALITY ASSURANCE PROVISIONS

* 4.1 Responsibility for inspection. Unless otherwise specified in the contract or purchase order, the contractor is responsible for the performance of all inspection requirements (examinations and tests) as specified herein. Except as otherwise specified in the contract or purchase order, the contractor may use his own or any other facilities suitable for performance of the inspection requirements specified herein, unless disapproved by the Government. The Government reserves the right to perform any of the inspections set forth in this specification where such inspections are deemed necessary to ensure supplies and services conform to prescribed requirements.

* 4.1.1 Responsibility for compliance. All items shall meet all requirements of sections 3 and 5. The inspection set forth in this specification shall become a part of the contractor's overall inspection system or quality program. The absence of any inspection requirements in the specification shall not relieve the contractor of the responsibility of ensuring that all products or supplies submitted to the Government for acceptance comply with all requirements of the contract. Sampling inspection, as part of manufacturing operations, is an acceptable practice to acertain conformance to requirements, however, this does not authorize submission of known defective material, either indicated or actual, nor does it commit the Government to accept

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T10:24Z
Check the source to verify that this is the current version before use.

defective material.

4.1.2 Certificate of compliance. Where certificates of compliance are submitted, the Government reserves the right to check test such items to determine the validity of the certification.

4.2 Classification of inspection. The inspection requirements specified herein are classified as follows:

1. First article inspection (see 4.3).
2. Quality conformance inspection (see 4.4).

4.3 First article inspection. When required, the first article submitted in accordance with 3.2, shall be inspected as specified in 4.4.2 and 4.4.3 for conformance with design, construction, workmanship and dimensional requirements.

* 4.4 Quality conformance inspection. Sampling for inspection shall be performed in accordance with MIL-STD-1394 except where otherwise indicated.

4.4.1 Component and material inspection. In accordance with 4.1 above, components and materials shall be tested in accordance with all the requirements of referenced specifications, drawings, and standards unless otherwise excluded, amended, modified, or qualified in this specification or applicable procurement documents.

4.4.2 Examination of the end item. The end item examination of the finished cap crowns shall be as specified in MIL-STD-1394.

4.4.3 Dimensional examination. The dimensional examination of the finished cap crowns shall be as specified in MIL-STD-1394.

4.4.4 Examination of packaging requirements. An examination shall be made to determine that packaging, packing, and marking shall be in accordance with MIL-STD-1394.

4.5 Palletization examination. An examination shall be made to determine that the palletization complies with the section 5 requirements. Defects shall be scored in accordance with the list below. The sample unit shall be one palletized unit load fully packaged. The lot size shall be the number of palletized unit loads in the end item inspected lot. The inspection level shall be S-1 and the AQL, expressed in terms of defects per hundred units, shall be 6.5 in accordance with MIL-STD-105.

Examine	Defect
Finished dimensions	Length, width,or height exceeds specified maximum requirements.
Palletization	Pallet pattern not as specified. Interlocking of loads not as specified. Load not bonded with required straps as specified.
Weight	Exceeds maximum load limits.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T10:24Z
Check the source to verify that this is the current version before use.

Marking	Omitted, incorrect, illegible, of improper size, location, sequence, or method of application.

5. PACKAGING

5.1 Preservation. Preservation shall be level A or C as specified (see 6.2).

* 5.1.1 Level A. Each cap crown shall be inserted flat into a clear polyethylene film bag having a thickness of 0.00125 inch (± 25 % tolerance). The polyethylene bag shall be formed with heat sealed seams that are straight, continuous and parallel to each other and the formed edges of the bag. As an alternate, the bag may be fabricated from polyethylene film tubing or sheeting. The final closure of the bag shall be heat sealed with the heat seal made as close as possible to the open end. A 1/4 inch diameter hole shall be made at one corner of the polyethylene bag to allow excess air to escape. As an alternate, for type I, class 2 and type II, class 4 cap crowns only, the polyethylene bag may be of the tuck-in or reverse flap type where a heat seal closure and corner hole are not required, and the final closure of the bag shall be made with the flap tucked in or reversed.

5.1.2 Level C. Each fully assembled service cap shall be preserved to afford adequate protection against physical damage during shipment from the contractor to the first receiving activity. The package shall be the same as that normally used by the contractor for retail distribution.

5.2 Packing. Packing shall be level A, B, or C as specified (see 6.2).

* 5.2.1 Level A. Forty (40) cap crowns, of one type, class and size only, preserved, as specified in 5.1, shall be packed in a fiberboard shipping container conforming to type CF, class weather resistant, variety DW, grade V15c, style RSC-L of PPP-B-636. The fiberboard for the box liner shall conform to type CF, class domestic of PPP-B-636. The inside dimensions of the shipping container shall approximate 12 inches in length, 24 inches in width, and 8 inches in depth. Approximate dimensions are furnished as a guide only. Level A packages shall be packed flat, two in length, one in width and twenty in depth within a shipping container. Each shipping container shall have the contents completely covered on the top and bottom with a sheet of commercial grade kraft paper. Each shipping container shall be closed in accordance with method III and reinforced as specified in the appendix of PPP-B-636.

* 5.2.2 Level B. Forty (40) cap crowns, of one type, class and size only, preserved, as specified in 5.1, shall be packed in a fiberboard shipping container conforming to type CF, class domestic, variety DW, grade 200, style RSC-L of PPP-B-636. The fiberboard for the box liner shall conform to type CF, class domestic of PPP-B-636. The inside dimensions of the shipping container shall approximate 12 inches in length, 24 inches in width, and 8 inches in depth. Approximate dimensions are furnished as a guide only. Level A packages shall be packed flat, two in length, one in width and twenty in depth within a shipping container. Each shipping container shall have the contents completely covered on the top and bottom with a sheet of commercial grade kraft paper. Each shipping container shall be closed in accordance with method III and reinforced as specified in the appendix of PPP-B-636.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T10:24Z
Check the source to verify that this is the current version before use.

5.2.3 Level C. Cap crowns, preserved as specified in 5.1, shall be packed in a manner to insure carrier acceptance and safe delivery at destination at the lowest transportation rate for such supplies. The quantity per shipping container shall be the same as that normally used by the contractor for retail distribution. Containers shall comply with U.S. Postal Manual, Uniform Freight Classification Rules, or National Motor Freight Classification Rules, as applicable.

* 5.2.4 Palletization. When specified (see 6.2) item packed as specified shall be palletized on a 4-way entry pallet in accordance with load type Ia of MIL-STD-147. Each prepared load shall be bonded with primary and secondary straps in accordance with bonding means C and D or Film bonding F or G. Pallet pattern shall be in accordance with the appendix of MIL-STD-147.

The pallet shall be 4-way, Type IV; Type V, Class 1, Size 2; or Type VIII, fabricated from wood group I, II, III or IV, Grade A of NN-P-71, or 4-way, Style 1, Size A, Type I, Class 1 fabricated from wood groups specified of MIL-P-15011. Interlocking of loads shall be effected by reversing the pattern of each course. If the container is of a size which does not conform to any of the patterns specified in MIL-STD-147, the pallet pattern used shall be approved by the contracting officer.

* 5.3 Marking. In addition to any special marking required by the contract or order, unit packs, intermediate or exterior containers and palletized unit loads shall be marked in accordance with MIL-STD-129.

* 5.4 MIL-STD-2073. When specified (see 6.2) Preservation and Packing shall be in accordance with MIL-STD-2073-1 and MIL-STD-2073-2.

* 6. NOTES

(This section contains information of a general or explanatory nature that may be helpful, but is not mandatory.)

6.1 Intended use. The cap crowns covered by this specification are intended for use as covers for service cap frames used by male personnel of the Navy.

* 6.2 Acquisition requirements. Acquisition documents should specify the following:

a. Title, number and date of this specification.
b. Type, class, and size required (see 1.2).
c. Issue of DODISS to be cited in the solicitation and, if required, the specific issue of individual documents referenced (see 2.1.1 and 2.2).
d. When first article inspection is required, (see 3.2) the item will be tested and should be a first article sample. The contracting officer should include specific instructions in acquisition documents regarding arrangement for examinations, quantity, and testing and approval.
e. Selection of applicable levels of preservation and packing (see 5.1 and 5.2).

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T10:24Z
Check the source to verify that this is the current version before use.

f. When palletization is required (see 5.2.4).
g. When all packaging data is to be found in MIL-STD-2073-1 and MIL-STD-2073-2 (see 5.4).

6.3 Samples. For access to samples, address the procuring activity issuing the invitation for bids (see 3.1).

* 6.4 Additional white and khaki cap crowns are available as optional items and shall meet the requirements specified through the certification program.

* 6.5 Changes from previous issue. The margins of this specification are marked with an asterisk to indicate where changes (additions, modifications, corrections, deletions) from the previous issue were made. This was done as a convenience only and the Government assumes no liability whatsoever for any inaccuracies in these notations. Bidders and contractors are cautioned to evaluate the requirements of this document based on the entire content irrespective of the marginal notations and relationship to the last previous issue.

* 6.6 Subject term (key word) listing.
Hat
Lined
Sides, flared
Top Piece, Circular
Unlined


Custodian:
Navy - NU

Preparing Activity:
Navy - NU

Review Activity:
DLA - CT

Project No. 8405-N065

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T10:24Z
Check the source to verify that this is the current version before use.

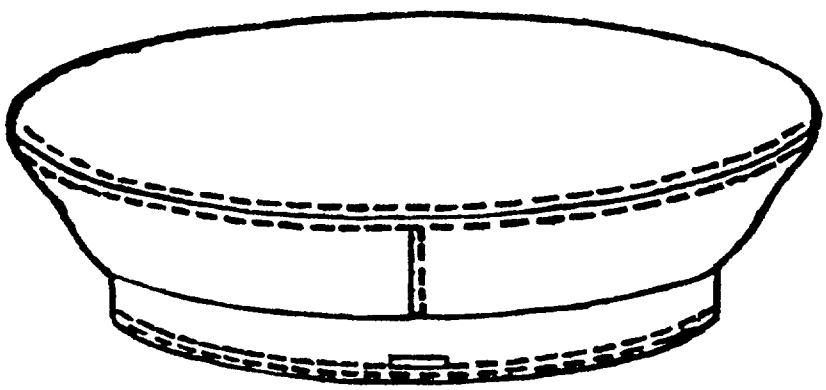

SEAM TYPE PER CONSTRUCTION OPERATIONS 6 AND 7 OF TABLE I



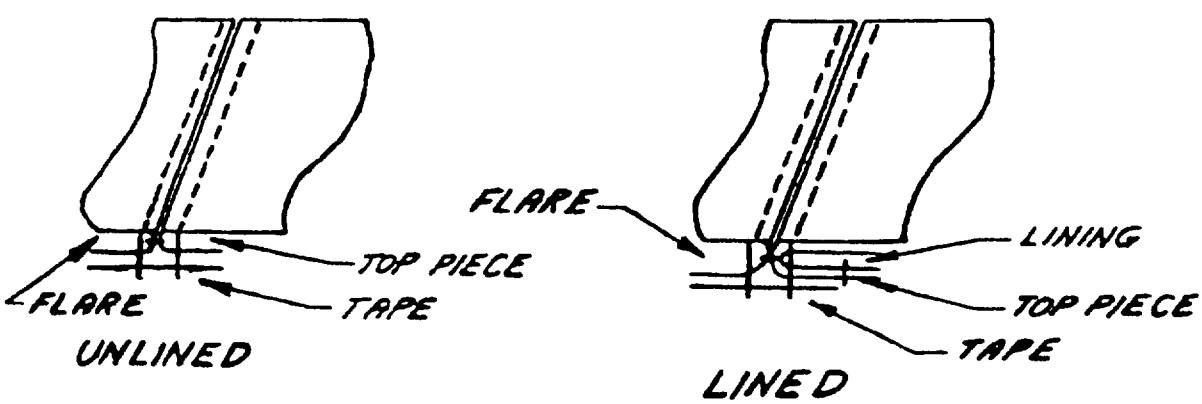


Figure 1 - Crown, Service Cap (Man's)


Source: https://assist.dla.mil -- Downloaded: 2026-10-18T10:24Z
Check the source to verify that this is the current version before use.

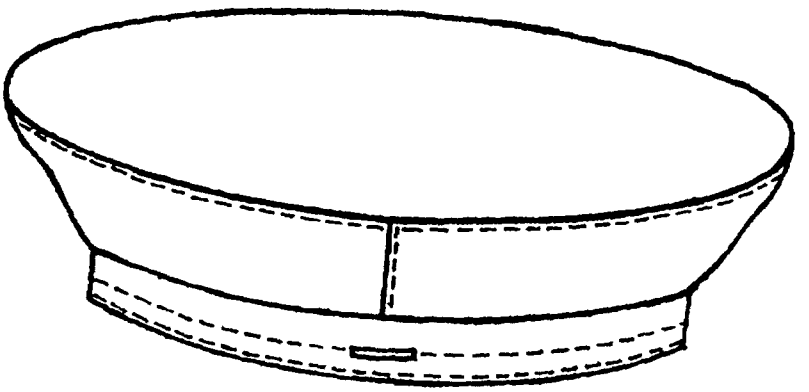

ALTERNATE SEAM TYPE

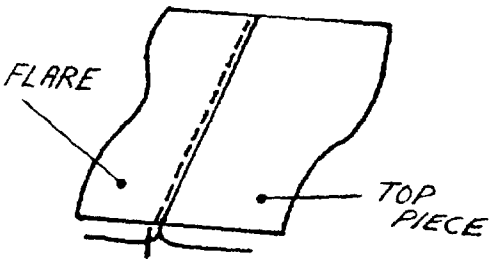

UNLINED

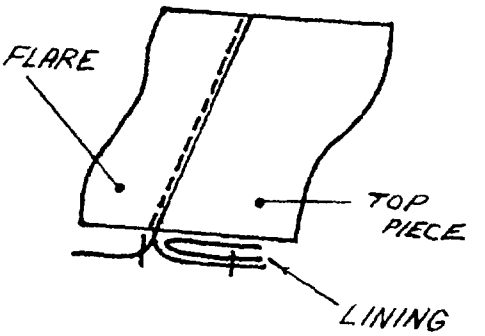

LINED

Figure 2 - Crown, Service Cap (Man's)

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T10:24Z
Check the source to verify that this is the current version before use.

INSTRUCTIONS: In a continuing effort to make our standardization documents better, the DoD provides this form for use in submitting comments and suggestions for improvements. All users of military standardization documents are invited to provide suggestions. This form may be detached, folded along the lines indicated, taped along the loose edge *(DO NOT STAPLE)*, and mailed. In block 5, be as specific as possible about particular problem areas such as wording which required interpretation, was too rigid, restrictive, loose, ambiguous, or was incompatible, and give proposed wording changes which would alleviate the problems. Enter in block 6 any remarks not related to a specific paragraph of the document. If block 7 is filled out, an acknowledgement will be mailed to you within 30 days to let you know that your comments were received and are being considered.

NOTE. This form may not be used to request copies of documents, nor to request waivers, deviations, or clarification of specification requirements on current contracts. Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document*(s)* or to amend contractual requirements.

(Fold along this line)

(Fold along this line)

DEPARTMENT OF THE NAVY

NO POSTAGE NECESSARY IF MAILED IN THE UNITED STATES

OFFICIAL BUSINESS
PENALTY FOR PRIVATE USE $300

BUSINESS REPLY MAIL
FIRST CLASS PERMIT NO 12503 WASHINGTON D C

POSTAGE WILL BE PAID BY THE DEPARTMENT OF THE NAVY

Navy Clothing and Textile Research Facility
21 Strathmore Road, (Code 50)
Natick, MA 01760-2490

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T10:24Z
Check the source to verify that this is the current version before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

(See Instructions – Reverse Side)

1. DOCUMENT NUMBER	2. DOCUMENT TITLE
MIL-C-17620F(NU)	CROWN, SERVICE CAP (MAN'S)

3a. NAME OF SUBMITTING ORGANIZATION	4. TYPE OF ORGANIZATION *(Mark one)*
	☐ VENDOR ☐ USER ☐ MANUFACTURER ☐ OTHER *(Specify)* _____
b. ADDRESS *(Street, City, State, ZIP Code)*	

5. PROBLEM AREAS

a. Paragraph Number and Wording

b. Recommended Wording

c. Reason/Rationale for Recommendation.

6. REMARKS

7a. NAME OF SUBMITTER *(Last, First, MI)* – Optional	b. WORK TELEPHONE NUMBER *(Include Area Code)* – Optional
c. MAILING ADDRESS *(Street, City, State, ZIP Code)* – Optional	8. DATE OF SUBMISSION *(YYMMDD)*

DD FORM 82 MAR 1426 PREVIOUS EDITION IS OBSOLETE.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T10:24Z
Check the source to verify that this is the current version before use.