MILITARY SPECIFICATION

FRAME, SERVICE CAP (MAN'S)

This amendment forms a part of Military Specification MIL-F-17619E(NU), dated 28 October 1981, and is approved for use by all Departments and Agencies of the Department of Defense.

Page 2

2.1 - Delete first three lines in their entirety and substitute the following:

"2.1 Government documents.

2.1.1 Specifications, standards, and handbooks. The following specifications, standards, and handbooks form a part of this specification to the extent specified herein. Unless otherwise specified, the issues of these documents shall be those listed in the issue of the Department of Defense Index of Specifications and Standards (DoDISS) and supplement therto, cited in the solicitation."

SPECIFICATIONS, FEDERAL - After "V-T-295 - Thread, Nylon" add the following document:

"NN-P-71 - Pallet, Material Handling, Wood, Stringer Construction 2 Way and 4 Way (Partial)"

SPECIFICATIONS, MILITARY, after "MIL-S-3577 - Sweatband, Headwear, Leather", add the following document:

"MIL-P-15011 - Pallet, Material Handling, Wood, Post Construction, 4 Way Entry"

STANDARDS, MILITARY, after "MIL-STD-129 - Marking For Shipment and Storage", add the following document:

"MIL-STD 147 - Palletized Unit Loads"

Before "LAWS AND REGULATIONS", add new paragraph:

AMSC N/A FSC 8405

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T10:24Z
Check the source to verify that this is the current version before use.

"2.1.2 Other Government documents, drawings, and publications. The following other Government documents, drawings, and publications form a part of this specification to the extent specified herein. Unless otherwise specified, the issues shall be those in effect on the date of the solicitation."

Page 3

2.2 - Delete first four lines in their entirety and substitute the following:

"2.2 Other publications. The following document(s) form a part of this specification to the extent specified herein. Unless otherwise specified, the issues of documents which are DoD adopted shall be those listed in the issue of the DoDISS specified in the solicitation. Unless otherwise specified, the issues of documents not listed in the DoDISS shall be the issue of the nongovernment documents which is current on the date of the solicitation."

Add the following paragraph:

"2.3 Order of precedence. In the event of a conflict between the text of this specification and the references cited herein, the text of this specification shall take precedence. Nothing in this specification, however, shall supersede applicable laws and regulations unless a specific exemption has been obtained."

Page 5

3.3.9.1, line 7 - Delete "0.050 to 0.060" and substitute "0.060 to 0.070".

3.3.9.1.1, line 2 - Delete "11 and 27" and substitute "22 and 38".

3.3.10 - Delete in its entirety and substitute the following:

"3.3.10 Sweatband. The sweatband shall be made of either sheepskin leather conforming to MIL-S-3577 or from artificial leather conforming to MIL-S-43993. The sweatband shall finish 1 1/2 to 1 3/4 inches wide and shall be black or brown in color. The finished sweatband shall contain perforations that are evenly spaced. A three inch long area at the back end of the sweatband shall be left unperforated when the option to use a stamped identification label is chosen. (See 3.3.17.1)."

Page 6

3.3.14.2, line 10 - After "conform" add "in principle".

3.3.15.1, line 1 - After "Navy" add "Buttons are not included for the Type I Cap Frames."

line 2 - After "screw" add "tube".

3.3.16.1, line 2 - Delete "IA3" and "IB3" and substitute "IA" and "IB" respectively.

line 3 - Delete "IC1" and substitute "IC".

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T10:24Z
Check the source to verify that this is the current version before use.

line 4 - Delete "IC2" and substitute "IC".

Page 7

3.3.17 - Delete in its entirety and substitute the following:

"3.3.17 Labels. Each cap frame shall have either an identification label with separate size label (see 3.3.17.1 and 3.3.17.2) or a combination identification-size label (see 3.3.17.2.1). An instruction label shall be included with each frame, conforming to the requirements of 3.3.17.3."

3.3.17.1 - Delete in its entirety and substitute the following:

"3.3.17.1 Identification label. The identification label shall conform to Type III (Decalcomania) or Type IV (Direct printing), Class 4 of DDD-L-20, except the label shall bear the following inscription:

FRAME, SERVICE CAP (MAN'S)
TYPE II CLASS 1 (EXAMPLE)
CONTRACT NO.: DLA100-00-0-0000 (EXAMPLE)
STOCK NUMBER 8405-00-000-0000 (EXAMPLE)
NAME OF CONTRACTOR:

The printing on the label shall show fastness to dry cleaning only."

Add the following paragraph:

"3.3.17.2.1 Identification-Size label. As an alternate, a nonwoven type combination identification and size label may be used in lieu of the marking types in 3.3.17.1 and separate size labels in 3.3.17.2. The label shall conform to Type VI, Class 4 of DDD-L-20, except that the inscription and format shall be as indicated below and in Figure 5:

	FRAME, SERVICE CAP (MAN'S)
S	TYPE II CLASS 1 (EXAMPLE)
I	CONTRACT NO.: DLA100-00-0-0000 (EXAMPLE)
Z	NSN 8405-00-000-0000 (EXAMPLE)
E	NAME OF CONTRACTOR:

The size of the label shall be 1 3/4 inches long by 1 1/2 inches wide (see Figure 5). The label shall be attached so that the size marking is clearly visible when the sweatband is in its finished position. The printing on the label shall be black and shall show fastness to dry cleaning only."

Page 9

Table I, Operation 1g. - Delete in its entirety and substitute the following:

"g. Cut a 1 7/8 (+ 1/8) inch wide by 6 1/2 inch long piece of white vinyl coated fabric for binding the top edge of style A front stand (see 3.3.12 (a)). (Coated fabric may be cut in roll form)."

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T10:24Z
Check the source to verify that this is the current version before use.

Page 12

Table I, Operation 5a. - End of paragraph add the following:

"or

As an alternate the loop may be heat sealed."

Page 14

Table I, Operations 7b and 7c. - Under "Thread, Needle" column, Delete "A/3, 24/4, 24/4" and substitute "A/3 or 24/4"

Operation 9a., line 1 - Delete "2" and substitute "1 7/8"

line 8 - End of paragraph add the following:

"Gauge of edge stitching shall be 1/16 to 1/8 inch from folded edge. Excess tunnel material shall be trimmed off even with the sides of the front stand."

Under "Stitches Per Inch" delete "8-10" and substitute "6-10".

Under "Thread Needle" column, delete "24/4, 24/4" and substitute "A/3 or 24/4".

Page 16

Operation 11a, line 2 - After "affixed" add "or marked".

line 3 - Delete "1 inch" and substitute "1 1/2 inches".

line 6 - End of paragraph add the following:

"or

When the alternate combination identification and size label is used, secure the size portion (see 3.3.17.2.1) of the label onto the finished side of the sheepskin or artificial leather sweatband, 1 1/2 inches to the left or right of the back cut joining seam and with the fold line even with the top edge of the sweatband, stitch across the end (under size designation), 1/8 inch from cut edge. Fold unattached portion of label to back of sweatband.

301	LSbj-1	7-10	A/3 or 30/3	A/3 or 30/3"

Operation 11b, line 4 - After "plies." add the following:

"When applicable, catch the free end of the label between the sweatband and the welt. Care should be taken so the end of the label is not visible below the welt."

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T10:24Z
Check the source to verify that this is the current version before use.

Page 17

Operation 12d, line 2 - Delete "1 inch" and substitute "1 1/2 inches".

Page 19

3.9, Table II - Under " Length of Grommet Wire" delete all lengths and substitute the following new lengths respectively - "32 1/2, 32 7/8, 33 1/4, 33 5/8, 34, 34 3/8, 34 3/4, 35 1/8, 35 1/2, 35 7/8, 36 1/8, 36 1/2, 36 7/8".

Add the following paragraph:

"4.1.2 Responsibility for compliance. All items must meet all requirements of sections 3 and 5. The inspection set forth in this specification shall become a part of the contractor's overall inspection system or quality program. The absence of any inspection requirements in the specification shall not relieve the contractor of the responsibility of assuring that all products or supplies submitted to the Government for acceptance comply with all requirements of the contract. Sampling in quality conformance does not authorize submission of known defective material, either indicated or actual, nor does it commit the Government to acceptance of defective material."

Page 23

4.3.2.1, defect I. Material Defects and Damages (General) c.1 - After "cut," add "scratch".

Page 25

Defect VIII. b. - End of defect add "or heat sealed (see operation 5a alternate)"

Page 28

Defect XII. Sweatband - Add new defect: "h. Perforated entirely when stamped identification label is used. Minor A"

Page 29

Defect XV. Labels - Delete in its entirety and substitute the following:

"XV. Labels

a. Omitted, incorrect or illegible	Major
b. Misplaced or insecurely attached	Minor A
c. Size of label or letters not as specified	Minor B
d. Edge of label visible at welt (when applicable)	Major"

Page 30

4.3.3, line 4 - After "delivery" add "period" "." and delete remainder of sentence.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T10:24Z
Check the source to verify that this is the current version before use.

Add the following paragraph:

"4.3.3.1 Palletization examination. An examination shall be made to determine that the palletization complies with the section 5 requirements. Defects shall be scored in accordance with the list below. The sample unit shall be one palletized unit load fully packaged. The lot size shall be the number of palletized unit loads in the end item inspected lot. The inspection level shall be S-1 and the AQL, expressed in terms of defects per hundred units, shall be 6.5 in accordance with MIL-STD-105.

Examine	Defect
Finished dimensions	Length, width,or height exceeds specified maximum requirements.
Palletization	Pallet pattern not as specified. Interlocking of loads not as specified. Load not bonded with required straps as specified.
Weight	Exceeds maximum load limits.
Marking	Omitted, incorrect, illegible, of improper size, location, sequence, or method of application."

Page 31

5.2.1, line 3 - Delete "type SF, grade V2s, class weather resistant" and substitute "Type CF, Class Weather Resistant, Variety DW, Grade V15c".

line 5 - Delete "class weather-resistant, variety DW, grade V15c" and substitute "Class Domestic".

Page 32

5.2.2, line 3 - Delete "SW or".

line 5 - Delete "variety DW, grade 275".

5.2.2.1 - Delete in its entirety.

Add the following paragraph:

"5.2.4 Palletization. When specified (see 6.2) item, packed as specified shall be palletized on a 4-way entry pallet in accordance with load type Ia of MIL-STD-147. Each prepared load shall be bonded with primary and secondary straps in accordance with the bonding means C, K, and L or O or P. Pallet patterns shall be in accordance with the appendix of MIL-STD-147.

The pallet shall be 4-way, Type IV; Type V, Class 1, Size 2; or Type VIII, fabricated from wood groups I, II, III, or IV, Grade A of NN-P-71, or 4-way, Style 1, Size A, Type I, Class 1 fabricated from wood groups specified, of MIL-P-15011. Interlocking of loads shall be effected by reversing the pattern of each course. If the container is of a size which does not conform to any

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T10:24Z
Check the source to verify that this is the current version before use.

of the patterns specified in MIL-STD-147, the pallet pattern used shall first be approved by the contracting officer."

5.3.1, line 4 - Delete "MIXED SIZES" and substitute "Mixed NSN'S".

line 6 - Delete "sizes" and substitute "National Stock Numbers".

Page 33

6.2, c. - Delete in its entirety and substitute the following:

"c. When first article inspection is required, (see 3.2) the item will be tested and should be a first article sample. The contracting officer should include specific instructions in acquisition documents regarding arrangement for examinations, quantity, and testing and approval."

e. - Delete in its entirety and substitute the following:

"e. When palletization is required (see 5.2.4)."

Page 34

Delete "Figure 1" and substitute new Figure 1.

After page 37 add "Figure 5".

Custodian:
Navy - NU


Review Activity:
DLA - CT

User Activity:
Navy - CG

Preparing Activity:
Navy - NU

Project No. 8405-N055

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T10:24Z
Check the source to verify that this is the current version before use.

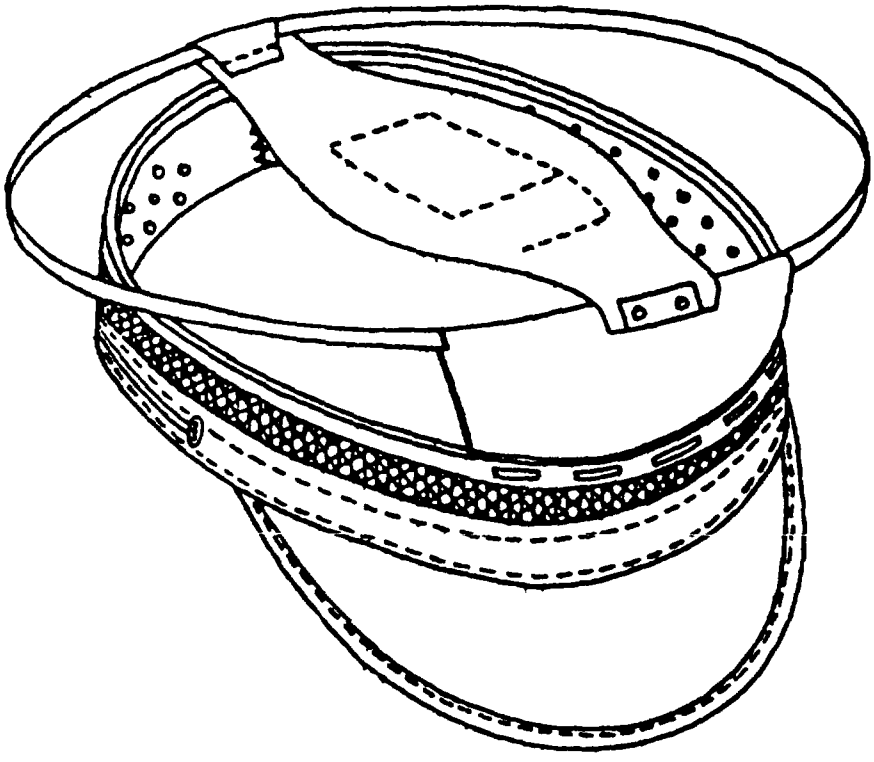

NOTE: WHEN NONWOVEN IDENTIFICATION SIZE LABEL IS USED THE SWEATBAND SHALL BE FULLY PERFORATED AND ONLY THE SIZE CLEARLY VISIBLE NEAR THE BACK SEAM

Figure 1 - Frame, Service Cap, Man's
With Style B Front Stand

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T10:24Z
Check the source to verify that this is the current version before use.

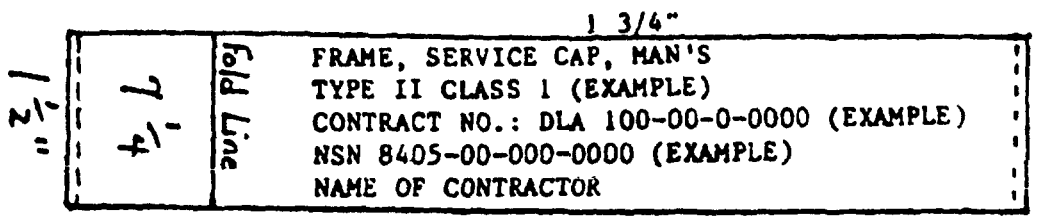


Figure 5 - Frame, Service Cap, Man's
Identification-Size label

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T10:24Z
Check the source to verify that this is the current version before use.