MIL-L-17653B
AMENDMENT 4
1 May 1987
SUPERSEDING
AMENDMENT 3
25 June 1965

MILITARY SPECIFICATION

LIFE PRESERVERS, VEST, WORK TYPE,
UNICELLULAR PLASTIC

This amendment forms a part of MIL-L-17653B, dated 21 October 1959, and is approved for use by all Departments and Agencies of the Department of Defense.

PAGE 1

* 2.1, Under SPECIFICATIONS, MILITARY: Delete: "MIL-P-15280 - Plastic Foam, Unicellular, Buoyant, Sheet and Molded Shape" and substitute "MIL-P-24333 - Plastic, Material, Unicellular, Sheet, Elastomeric."

PAGE 2

* 3.1.4, line 3: Delete "MIL-P-15280, type IA" and substitute "MIL-P-24333, type I".

3.1.6, last sentence: Delete and substitute: "The clasp and slide adjuster shall have a minimum breaking strength of 360 pounds when tested as specified in 4.4.2 and 4.4.3, respectively."

* 3.2.7: Delete and substitute:

"3.2.7 Slide fasteners. Slide fasteners shall be nylon on nylon tape, have enameled brass sliders and shall conform to type I, style 2, size LM, class A of V-F-106, except that the tape width shall be 9/16 inch. Length of slide fasteners shall be 9 inches for the front panels of the preserver and 10 inches for the back panel. Fasteners shall pass the salt spray test specified in V-F-106. The slider shall have a perforated enameled brass pull tab. Color of the tape and enamel shall acceptably match the color of the cotton drill specified (see 3.1.1). All metal components of the slide fastener shall be brass of the composition specified in V-F-106."

AMSC N/A FSC 4220
DISTRIBUTION STATEMENT A Approved for public release; distribution unlimited

Source: https://assist.dla.mil -- Downloaded: 202610-18T10:25Z
Check the source to verify that this is the current version before use.

3.2.10: Delete in its entirety.

* 4.1: Delete and substitute:

"4.1 Responsibility for inspection. Unless otherwise specified in the contract or purchase order, the contractor is responsible for the performance of all inspection requirements as specified herein. Except as otherwise specified in the contract or purchase order, the contractor may use his own or any other facilities suitable for the performance of the inspection requirements specified herein, unless disapproved by the Government. The Government reserves the right to perform any of the inspections set forth in the specification where such inspections are deemed necessary to assure supplies and services conform to prescribed requirements."

* Add as new paragraph:

"4.1.1 Responsibility for compliance. All items must meet all requirements of sections 3 and 5. The inspection set forth in this specification shall become a part of the contractor's overall inspection system or quality program. The absence of any inspection requirements in the specification shall not relieve the contractor of the responsibility of assuring that all products or supplies submitted to the Government for acceptance comply with all requirements of the contract. Sampling in quality conformance does not authorize submission of known defective material, either indicated or actual, nor does it commit the Government to acceptance of defective material."

4.2, last line: Delete "acceptance".

4.3.1: Delete "acceptance" and substitute "quality conformance".

4.3.1.2, line 3: Delete "by the inspector".

4.3.1.3, line 5: Delete "by the inspector".

Add as new paragraph:

"4.4.3 Slide adjuster breaking strength test. A section of webbing shall be attached to the center and a section to each slide of the slide adjuster so that the strain shall be taken perpendicular to the face of the slide adjuster. The specimen shall be sufficient length so that the distance between the jaws of the testing machine shall be approximately 10 inches after the specimen has been clamped for testing. The rate of separation of the jaws of the testing machine shall be approximately 12 inches per minute. The load shall be increased to 360 pounds and held at that value for 1 minute."

4.5, line 4: Delete "inspected" and substitute "examined".

6.1(b), line 2: Delete "3.1.2" and substitute "3.1.3".

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T10:25Z
Check the source to verify that this is the current version before use.

MIL-L-17653B
AMENDMENT 4

PAGES 6 and 7

Figures 1 and 2: Delete and substitute the attached figures.

NOTE: The margins of this amendment are marked with an asterisk to indicate where changes (additions, modifications, corrections, deletions) from the previous amendment were made. This was done as a convenience only and the Government assumes no liability whatsoever for any inaccuracies in these notations. Bidders and contractors are cautioned to evaluate the requirements of this document based on the entire content irrespective of the marginal notations and relationship to the last previous amendment.

Custodians:
Army - ME
Navy - SH

Review activities:
Navy - SH
DLA - CS

Preparing activity:
Navy - SH
(Project 4220-0333)

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T10:25Z
Check the source to verify that this is the current version before use.

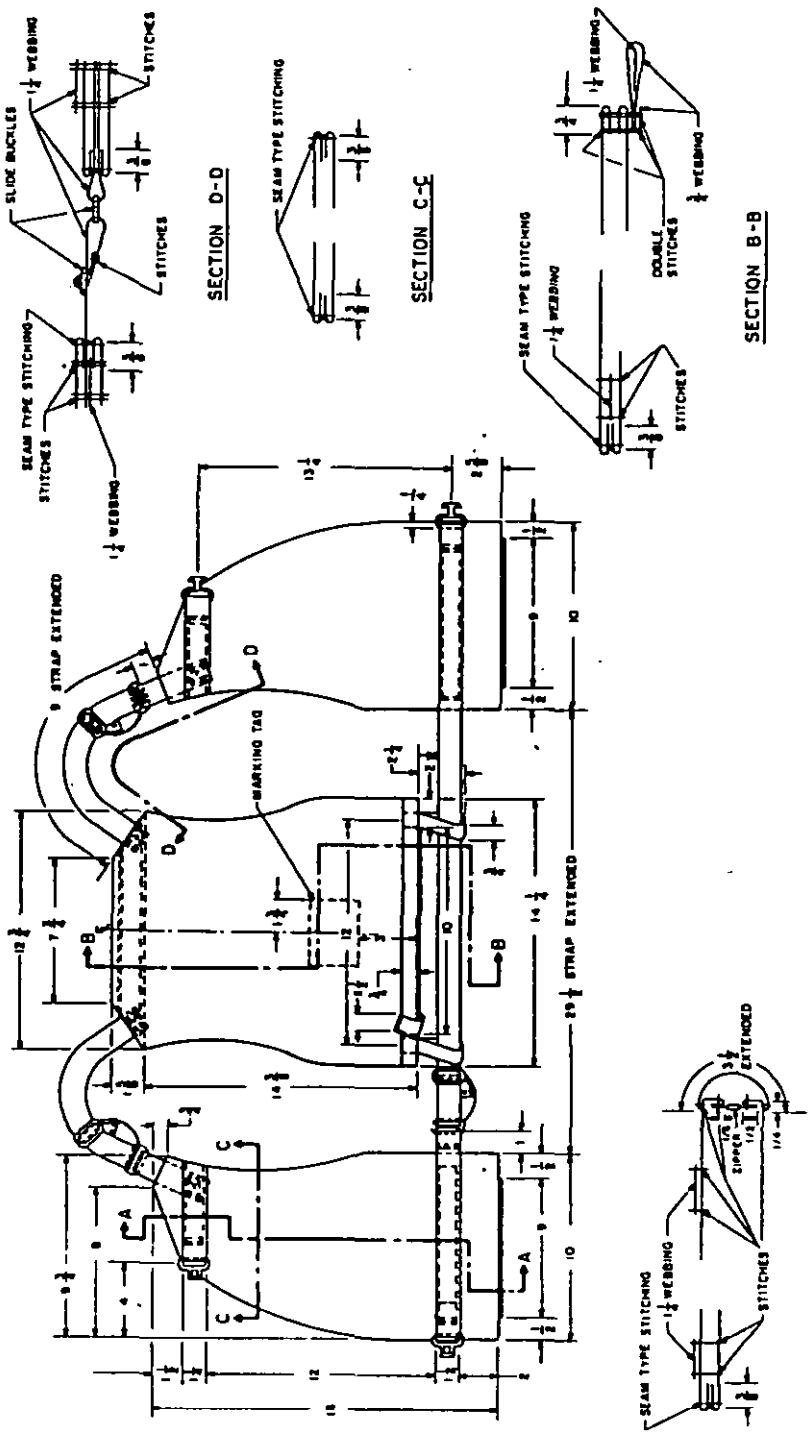


FIGURE 1. Life preserver assembly.

SH 3081A

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T10:25Z
Check the source to verify that this is the current version before use.

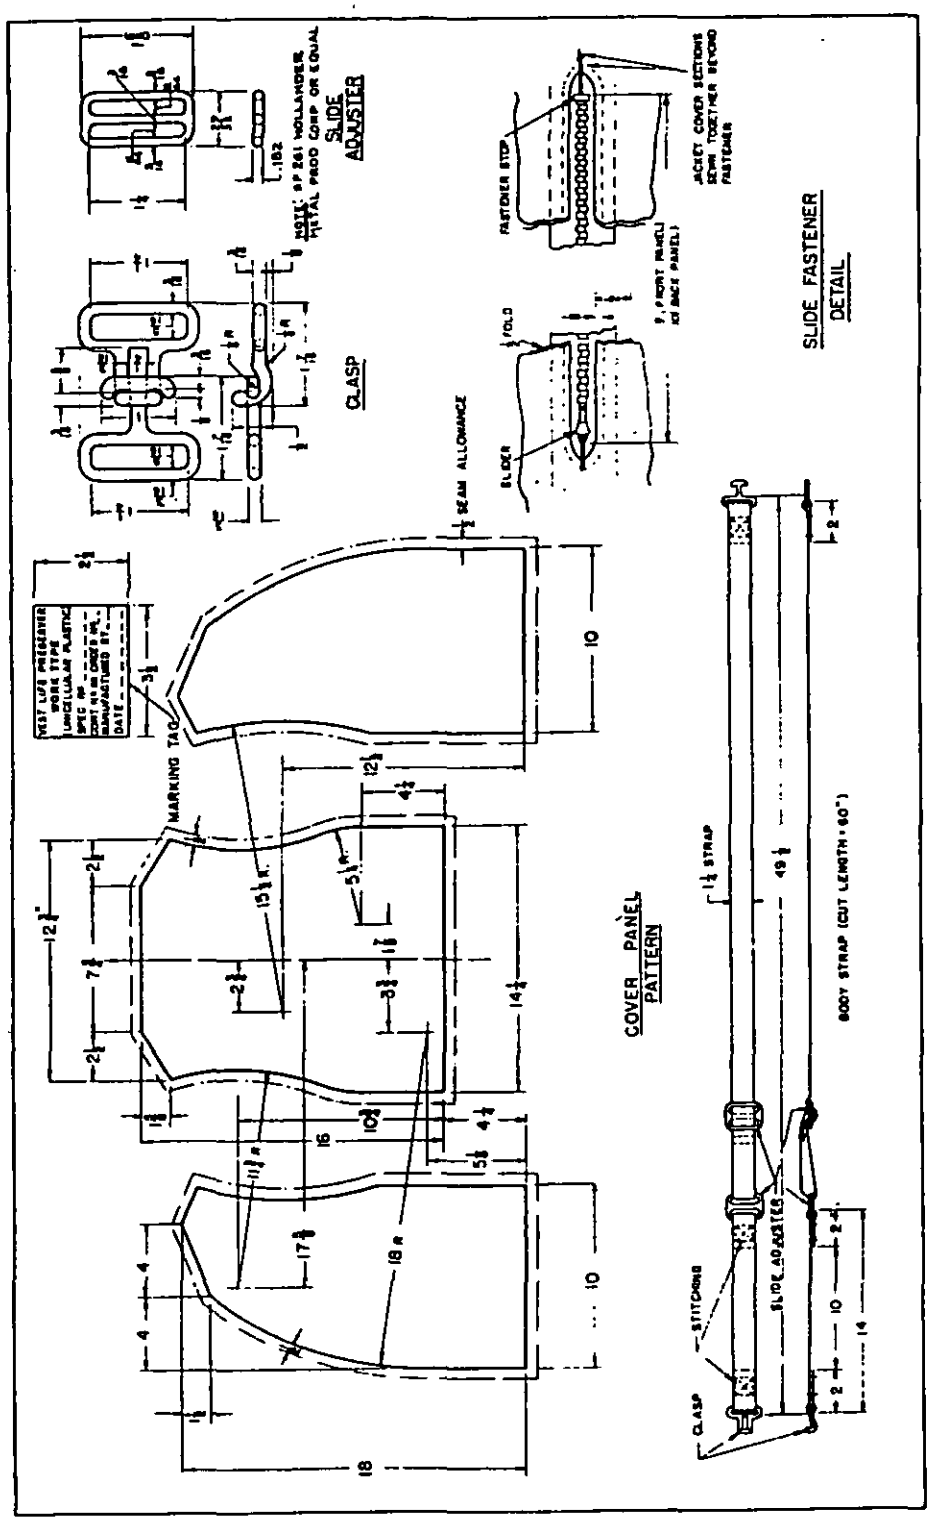


FIGURE 2. Life preserver details.

SH 3868A

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T10:25Z
Check the source to verify that this is the current version before use.