INCH-POUND

MIL-P-17662C(MC)
14 March 1990
SUPERSEDING
MIL-P-17662B(MC)
13 January 1966

MILITARY SPECIFICATION

POLE, FOLDING COT INSECT BAR

This specification is approved for use by all Departments and Agencies of the Department of Defense.

1. SCOPE

1.1 Scope. This specification covers requirements for a wooden pole designed to fit into holes in the end sticks of the standard folding canvas cot to support insect bar (netting).

2. APPLICABLE DOCUMENTS

2.1 Specifications and standards. The following specifications and standards form a part of this document to the extent specified herein. Unless otherwise specified, the issues of these documents are those listed in the issue of the Department of Defense Index of Specifications and Standards (DoDISS) and supplement thereto, cited in the solicitation (see 6.2).

SPECIFICATIONS

FEDERAL

PPP-B-636 - Box, Shipping, Fiberboard

MILITARY

MIL-W-13518 - Wood, Preservation, Tetrachtorophenol and Pentacheloropnenol, Surface Sealing Compound

STANDARDS

MILITARY

Beneficial comments (recommendations, additions, deletions) and any pertinent data which may be of use in improving this document should be addressed to the Commanding General (PSE-C), Marine Corps Research, Development, and Acquisition Command, Washington, DC 20380, by using the self-addressed Standardization Document Improvement Proposal (DD Form 1426) appearing at the end of this document or by letter.

AMSC N/A FSC 7210

Distribution Statement A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T10:26Z
Check the source to verify that this is the current version before use.

MIL-STD-105	- Sampling Procedures and Tables for Inspection by Attributes
MIL-STD-129	- Marking for Shipment and Storage
MIL-STD-147	- Palletized Unit Loads
MIL-STD-731	- Quality of Wood Members for Containers and Pallets

(Unless otherwise indicated, copies of federal and military specifications, standards, and handbooks are available from the Navy Publications and Forms Center (ATTN: NPODS), 5801 Tabor Avenue, Philadelphia, PA 19120-5099.)

2.1.2 Other Government documents and publications. The following other Government documents and publications form a part of this document to the extent specified herein. Unless otherwise specified, the issues are those cited in the solicitation.

LAWS AND REGULATIONS

U. S. POSTAL SERVICE MANUAL

(Copies of the manual may be obtained from the Superintendent of Documents, U.S. Government Printing Office, Washington, DC 20402.)

2.2 Non-Government publications. The following document(s) form a part of this document to the extent specified herein. Unless otherwise specified, the issues of the documents which are DoD adopted are those listed in the issue of the DoDISS cited in the solicitation. Unless otherwise specified, the issues of documents not listed in the DoDISS are the issues of the documents cited in the solicitation (see 6.2).

AMERICAN SOCIETY FOR TESTING AND MATERIALS (ASTM)

D-2016 - Moisture Content of Wood

(Copies may be obtained from the American Society for Testing and Materials, 1916 Race Street, Philadelphia, PA 19103).

UNIFORM CLASSIFICATION COMMITTEE, AGENT

Uniform Freight Classification Rules

(Application for copies should be addressed to the Uniform Classification Committee, Room 1106, 222 South Riverside Plaza, Chicago, Illinois 60606).

NATIONAL MOTOR FREIGHT TRAFFIC ASSOCIATION, INC., AGENT

National Motor Freight Classification

(Application for copies should be addressed to American Trucking Association, Attn: Tariff Order Section, 1616 P Street, N.W., Washington, DC 20036.)

2.3 Order of precedence. In the event of a conflict between the text of this document and the references cited herein (except for related associated detail specifications, specification sheets or MS standards), the text of this document

Source: https://assist.dla.mil Downloaded: 2026-10-18T10:26Z
Check the source to verify that this is the current version before use.

takes precedence. Nothing in this document, however, supersedes applicable laws and regulations unless a specific exemption has been obtained.

3. REQUIREMENTS

3.1 Standard samples. Standard samples are furnished solely for guidance and information to the contractor (see 6.4). Variation from this specification may appear in the standard sample, in which case the specification shall govern.

3.2 First article. When specified in the contract or purchase order, a sample shall be subjected to first article inspection and approval (see 4.4 and 6.3).

3.3 Materials

3.3.1 Wood. All wood shall be dried to a moisture content of 8 to 12 percent at time of fabrication (see 4.6.1). All wood parts shall be free from brashness, case hardening; honeycombing, bark pocket, loose knots, insect or larvae channels, shade, splits, decay doze, warp or other defects, except as permitted herein. The combined slope of grain of two adjacent faces of any blank shall not exceed 1 inch in 12 inches when tested as specified in 4.6.2. The following defects will be permitted.

(1) Local irregularity of grain direction, such as swirl, burl, or bird's eye.

(2) Tight knots, not more than 1/4 inch in diameter, provided there is not more than one such knot per pole.

(3) Medium stain which does not obscure the grain of the wood.

(4) Surface checks not more than 3 inches long, or 1/64 inch wide, which are barely perceptible and occur on the surface only are permissible, provided there is not more than one such check per pole.

(5) Holes not more than 1/16 inch in diameter, provided there are not more than 4 in one pole.

(6) Entire length of pole shall not be warped more than 3/32 inch.

3.3.2 Kinds of wood. Any of the following kinds of wood may be used.

Ash	Birch	Hickory	Oak, white
Beech	Elm, rock (cork)	Maple, sugar or black (hard)	Pecan

3.4 Design and finished dimensions. The design and finished dimensions shall be as shown in Figure 1.

3.5 Finish. All poles shall be sanded smoothly and dipped or sprayed with a satisfactory commercial clear varnish or shellac. The finish shall be continuous, level, adherent, free from cracks and dust or other inclusions, and shall not be tacky when given a visual examination. As an alternate, wood preservations and surface sealer, conforming to MIL-W-13518 and modified with zinc napthenate as a fungicide and "NUXTRA" brand varnish may be used.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T10:26Z
Check the source to verify that this is the current version before use.

3.6 Workmanship. The finished poles shall conform to the quality of product established by this specification. The occurrence of defects shall not exceed the levels set by the applicable acceptable quality levels.

4. QUALITY ASSURANCE PROVISIONS

4.1 Responsibility for inspection. Unless otherwise specified in the contract or purchase order, the contractor is responsible for the performance of all inspection requirements as specified herein. Except as otherwise specified in the contract or purchase order, the contractor may use his own or any other facilities suitable for the performance of the inspection requirements specified herein, unless disapproved by the Government. The Government reserves the right to perform any of the inspections set forth in the specification where such inspections are deemed necessary to ensure supplies and services conform to prescribed requirements.

4.1.1 Responsibility for compliance. All items must shall meet all requirements of Sections 3 and 5. The inspection set forth in this specification shall become a part of the contractor's overall inspection system or quality program. The absence of any inspection requirements in the specification shall not relieve the contractor of the responsibility of ensuring that all products or supplies submitted to the Government for acceptance comply with all requirements of the contract. Sampling in quality conformance does not authorize submission of known defective material, either indicated or actual, nor does it commit the Government to accept defective material.

4.2 Classification of inspection. The inspection requirements specified herein are classified as follows:

a. First article inspection (see 4.4)

b. Quality conformance inspection (see 4.5)

4.3 Inspection conditions. Unless otherwise specified, all inspections shall be performed in accordance with the test conditions specified in MIL-STD-105.

4.4 First article inspection. When a first article is required (see 3.2 and 6.2), it shall be examined for the defects specified in 4.5.5.1 and 4.5.5.2. the presence of any defect may be cause for rejection of the first article. The number of units to be inspected shall be specified by the contracting officer.

4.5 Quality conformance inspection.

4.5.1 Component and material testing. In accordance with 4.1, components and materials shall be inspected and tested in accordance with all the requirements of referenced specifications, drawings, and standards, unless otherwise excluded, amended, modified, or qualified in this specification or applicable purchase documents. All test reports shall contain the individual values used in expressing the final result. The lot shall be unacceptable if one or more sample units fail to meet any of the test requirements specified. The lot size and sample size shall be in accordance with the following:

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T10:26Z
Check the source to verify that this is the current version before use.

Lot Size (lot unit)	Sample Size (sample unit)
800 or less	2
801 to 22,000 inclusive	3
22,001 and over	5

4.5.2 Certification of compliance. Components and materials listed below may be accepted on the basis of a contractor's certification of compliance for characteristics indicated.

Component	Characteristic	Rqmt. Para.
Wood	Absence of brashness	3.3.1
	No casehardening	3.3.1
	Species	3.3.2
Varnish or shellac	Finish	3.5

4.5.3 In-process inspection. Inspection shall be made at any point or during any phase of the manufacturing process to determine whether operations or assemblies are accomplished as specified herein. The Government reserves the right to exclude from consideration for acceptance any material for which in-process inspection has indicated nonconformance.

4.5.4 Intermediate testing. Testing of the partially-fabricated poles shall be performed in accordance with Table I for the characteristics shown therein. The sample unit, for each test, shall be one wooden blank immediately prior to turning. The inspection level shall be S-1 (see 6.5). The requirements are applicable to the sample unit.

Table I

Component & lot expressed in terms of	Characteristic	Rqmt. Para.	Test Method	#Det per sample unit	Results rptd as
Wood (100 blanks)	Moisture content	3.2	4.6.1	3	Avg of 3 det. per sample unit to nearest 0.1%
	Slope of grain	3.2	4.6.2	2 (1 ea. or 2 adjacent faces)	Pass or fail

4.5.5 End item examination. The defects found during examination shall be classified in accordance with 4.5.5.1 and 4.5.5.2. The inspection level shall be II (see 6.5). The sample unit for these examinations shall be one pole.

4.5.5.1 Examination of poles for visual characteristics. All defects shall be classified as indicated below except those with an asterisk (*) in classification column which shall be classified as follows:

Major defect - When seriously affecting appearance or serviceability.
Minor defect - When affecting appearance or serviceability but not seriously.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T10:26Z
Check the source to verify that this is the current version before use.

EXAMINE	DEFECT	CLASSIFICATION		
		MAJOR	MINOR	
			A	B
Pole: Finish	Not finished or finish not as specified.	101		
	Damaged or marred, e.g., scratch, gouge, dig, or scuff mark.	*		
	Not adherent, e.g., is blistered, peeled or flaked.	102		
	Coating not continuous, not smooth or not uniform, e.g., contains area of no film, excessive orange-peel, run, drip or sag.	*		
	Dirt or foreign matter imbedded, seriously affecting appearance.		201	
	Surface not smooth.	*		
	Finish not dry, e.g., tacky to touch.		202	
Quality of wood	Not of specified species.	103		
	Evidence of brashness, honeycombing, casehardening, decay or doze.	104		
	Any sound, tight knot more than 1/4 inch in diameter.		203	
	More than one permissible knot in any pole.	105		
	Loose or unsound knot.	106		
	Hole more than 1/16 inch in diameter.	*		
	More than 4 permissible holes, per pole.	107		
	Sliver or splinter.	108		
	Bark pocket, larvae channel, shake, split or other imperfection.	*		

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T10:26Z
Check the source to verify that this is the current version before use.

EXAMINE	DEFECT	CLASSIFICATION		
		MAJOR	MINOR	
			A	B
Quality of wood (cont'd)	Stain obscuring grain or wood.	*		
	Surface check more than 1/64 inch wide or more than 3 inches long.	*		
	Warped more than 3/32 inch of entire length of pole.	*		
Workmanship	Out of round.		204	
	Broken, cracked, or fractured.	109		
	Chip out, gouge, rough saw cut, rough or torn grain, or undue absence of wood.	*		
	9/16 inch diameter spindle (base) operation poorly accomplished.	110		
	Edges of spindle (base) not rounded.		205	

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T10:26Z
Check the source to verify that this is the current version before use.

4.5.2.2 Examination of poles for defects in dimensions. Any dimension not within specified tolerances shall be classified as a defect. The inspection level shall be S-2 (see 6.5).

4.5.6 Examination of preparation for delivery requirements. An examination shall be made to determine compliance with packaging, packing and marking requirements as specified in Section 5. Defects shall be scored in accordance with the list below. The sample unit shall be one shipping container fully prepared for delivery with the exception that it need not be sealed. Defects of closure listed below shall be examined on shipping containers fully prepared for delivery. The lot size shall be the number of shipping containers in the end item inspection lot. The inspection level shall be S-2 (see 6.5).

Examine	Defect
Markings (exterior interior)	Omitted, incorrect, illegible, of improper size, location, sequence or method of application.
Materials	Any component missing. Any component damaged, affecting serviceability.
Workmanship	Inadequate application of components, such as incomplete closure of case liner, container flaps; loose strapping, and inadequate stapling. Bulging or distortion of containers.
Content	Number of poles per shipping containers is more or less than required.

4.5.7 Palletization examination. The fully packaged and palletized end items shall be examined for the defects listed below. The lot size shall be expressed in units of palletized unit loads. The sample unit shall be one palletized unit load, fully packaged. The inspection level shall be S-1 (see 6.5).

Examine	Defect
Finished dimensions	Length, width, or height exceeds specified maximum requirement.
Palletization	Pallet pattern not as specified. Interlocking of loads not as specified. Load not bonded as specified.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T10:26Z
Check the source to verify that this is the current version before use.

Weight	Exceeds maximum load limits.
Marking	Omitted; incorrect; illegible; of improper size, location, sequence, or method of application.

4.6 Tests.

4.6.1 Moisture content. Moisture content shall be determined in accordance with ASTM D-2016.

4.6.2 Slope of wood grain. The slope of grain shall be determined by combining the grain direction of two adjacent faces of a blank prior to turning. When one of these faces is straight grained, the true slope of grain is shown on the other face. When there is a slope on both faces, the true of combined slope is greater than the slope on either face. Slope of grain is shown on edge grained faces by the summerwood bands, by the direction in which a free flowing ink or dye spreads or by the course taken by a narrow strip lifted by a knife point and torn out. Direction of fiber may also be measured by a slope of grain detector.

5. PACKAGING

5.1 Packing. Packing shall be level A or commercial.

5.1.1 Level A. One hundred poles shall be packed in a snug fitting shipping container conforming to type CF, class weather resistant, variety SW, style FoL, grade V3c of PPP-B-636. Each shipping container shall be closed in accordance with method III, water-proofed in accordance with method V, and reinforced as specified in the appendix of PPP-B-636.

5.1.2 Commercial. One hundred poles shall be packed in a manner to insure carrier acceptance and safe delivery at destination, at the lowest rate. Containers shall be in accordance with Uniform Freight Classification Rules or regulations of other carriers applicable to the mode of transportation.

5.2 Marking. In addition to any special marking required by the contract or order, shipping containers shall be marked in accordance with MIL-STD-129.

5.3 Palletization. When specified (see 6.2), poles packed as specified in 5.1 shall be palletized on a 4-way entry pallet in accordance with load type Ia of MIL-STD-147. Pallet types shall be type I (4-way entry), type IV, or type V in accordance with MIL-STD-147. Pallets shall be fabricated from wood groups I, II, III, or IV of MIL-STD-731. Each prepared load shall be bonded with primary and secondary straps in accordance with bonding means K and L or film bonding means O or P. If the container is of a size which does not conform to any of the pallet patterns specified in MIL-STD-147, the pallet pattern used shall first be approved by the contracting officer.

6. NOTES

(This section contains information of a general or explanatory nature that may be helpful, but is not mandatory).

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T10:26Z
Check the source to verify that this is the current version before use.

6.1 Intended use. The poles are intended to be used with the standard canvas folding cot, as support for a nylon insect bar (netting).

6.2 Acquisition requirements. Acquisition documents should specify the following:

a. Title, number and date of this specification.
b. When first article is required and the number of units for the first article (see 3.2).
c. Selection of applicable levels of packing (see 5.1 and 5.2).
d. When palletization is required (see 5.4).
e. Acceptance criteria required (see 6.5).

6.3 First article. When a first article is required, it shall be inspected and approved under the appropriate provisions of FAR 52.209. The first article should be a preproduction sample. The contracting officer should specify the appropriate type of first article and the number of units to be furnished. The Contracting Officer should also include specific instructions in acquisition document regarding arrangements for selection, inspection, and approval of the first article.

6.4 Sample. For access to samples, address the contracting activity issuing the invitation for bids or request for proposal.

6.5 Acceptance criteria. The acceptance criteria below are recommended for use. The acceptance criteria as specified in the contract or purchase order shall be binding. Unless otherwise specified, the following acceptance criteria are in accordance with MIL-STD-105.

6.5.1 For intermediate testing. An acceptance quality level (AQL), expressed in terms of defects per hundred units, of 4.0 is recommended.

6.5.2 For end item visual examination. An AQL, expressed in terms of defects per hundred units, of 2.5 for major defects and 10 for total (major and minor combined) defects is recommended.

6.5.3 For end item dimensional examination. An AQL, expressed in terms of defects per hundred units, of 4.0 is recommended.

6.5.4 For packing examination. An AQL, expressed in terms of defects per hundred units, of 2.5 is recommended.

6.5.5 For palletization examination. An AQL, expressed in terms of defects per hundred units, of 6.5 is recommended.

6.6 Subject term (keyword) listing.

Canvas
Wood

6.7 Changes from previous issue. Marginal notations are not used in this revision to identify changes with respect to the previous issue due to the extensiveness of the changes.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T10:26Z
Check the source to verify that this is the current version before use.

Preparing Activity
Navy - MC
Project No. 7210-N290

Custodians:

Army - GL
Navy - MC
Air Force - 82


Review activities:

Army - MD
Air Force - 85
Defense Supply Agency - CT

User activities:

Navy - MS, YD

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T10:26Z
Check the source to verify that this is the current version before use.

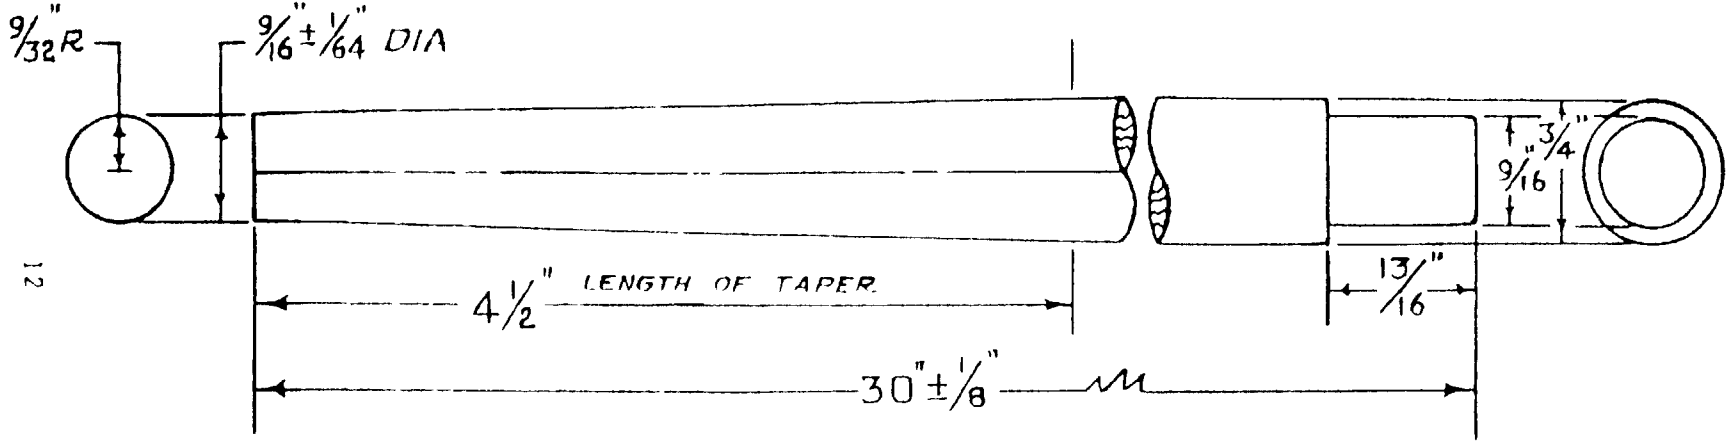

TOLERANCES 1/16 INCH, UNLESS OTHERWISE SPECIFIED

FIGURE 1. POLE, FOLDING COT, INSECT BAR

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T10:26Z
Check the source to verify that this is the current version before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

INSTRUCTIONS

1. The preparing activity must complete blocks 1, 2, 3, and 8. In block 1, both the document number and revision letter should be given.
2. The submitter of this form must complete blocks 4, 5, 6, and 7.
3. The preparing activity must provide a reply within 30 days from receipt of the form.

NOTE: This form may not be used to request copies of documents, nor to request waivers, or clarification of requirements on current contracts. Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document(s) or to amend contractual requirements.

I RECOMMEND A CHANGE:	1. DOCUMENT NUMBER	2. DOCUMENT DATE (YYMMDD)
	MIL-P-17662C(MC)	90/03/14

3. DOCUMENT TITLE

POLE, FOLDING COT INSECT BAR

4. NATURE OF CHANGE (Identify paragraph number and include proposed rewrite, if possible. Attach extra sheets as needed.)

5. REASON FOR RECOMMENDATION

6. SUBMITTER

a. NAME (Last, First, Middle Initial)	b. ORGANIZATION	
c. ADDRESS (Include Zip Code)	d. TELEPHONE (Include Area Code) (1) Commercial (2) AUTOVON (If applicable)	7. DATE SUBMITTED (YYMMDD)

8. PREPARING ACTIVITY

a. NAME	b. TELEPHONE (Include Area Code) (1) Commercial	(2) AUTOVON
Commanding General, Marine Corps Research, Development, and Acquisition Command	(202) 696-1186/87/88	226-1186/87/88
c. ADDRESS (Include Zip Code) Washington, D.C. 20380-0001	IF YOU DO NOT RECEIVE A REPLY WITHIN 45 DAYS, CONTACT: Defense Quality and Standardization Office 5203 Leesburg Pike, Suite 1403, Falls Church, VA 22041-3466 Telephone (703) 756-2340 AUTOVON 289-2340	

DD Form 1426, OCT 89 *Previous editions are obsolete.* 198/290

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T10:26Z
Check the source to verify that this is the current version before use.