MIL-S-17615E(NU)
18 January 1980
SUPERSEDING
MIL-S-17615D(SA)
18 April 1974

MILITARY SPECIFICATION

STRAP, CHIN (NAVY AND COAST GUARD)

This specification is approved for use by Navy Clothing and Textile Research Facility, Department of the Navy and is available for use by all Departments and Agencies of the Department of Defense.

1. SCOPE

1.1 Scope. This specification covers the requirements for chin straps.

* 1.2 Classification. The chin straps shall be of the following types and classes as specified (see 6.2):

Type I - Woven Gold Lace (Latex Impregnated Paperboard Backing)

Class 1 - 1/4 inch, Warrant Officers (W-1)
Class 2 - 3/8 inch, Naval Academy Midshipmen, Naval Reserve Officers, Naval Aviation Cadets
Class 3 - 1/2 inch, Commissioned Officers, Commissioned Warrant Officers

Type III - Vinyl

Class 1 - 1/2 inch, Chief Petty Officers, Junior Naval Reserve Officers Training Corps, and Male Enlisted Personnel

Type IV - Patent Leather

Class 1 - 1/2 inch, Chief Petty Officers, Junior Naval Reserve Officers Training Corps, and Male Enlisted Personnel

Beneficial comments (recommendations, additions, deletions,) and any pertinent data which may be of use in improving this document should be addressed to: Officer in Charge, Navy Clothing and Textile Research Facility, 21 Strathmore Road, Natick, MA 01760 by using the self addressed Standardization Document Improvement Proposal (DD Form 1426) appearing at the end of this document or by letter.

FSC 8405

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T10:23Z
Check the source to verify that this is the current version before use.

Type V - Plastic Sheeting (Latex Impregnated Paperboard Backing)

Class 1 - 1/2 inch, Chief Petty Officers, Junior Naval Reserve Officers Training Corps, and Male Enlisted Personnel.

2. APPLICABLE DOCUMENTS

2.1 Issues of Documents. The following documents of the issue in effect on date of invitation for bids or request for proposal, form a part of this specification to the extent specified herein.

SPECIFICATIONS

FEDERAL

L-P-375	-	Plastic Film, Flexible, Vinyl Chloride
V-T-276	-	Thread, Cotton
UU-P-31	-	Paper, General Specifications and Methods of Testing
PPP-B-566	-	Boxes, Folding, Paperboard
PPP-B-676	-	Boxes, Setup

MILITARY

MIL-F-495	-	Finish, Chemical, Black, for Copper Alloys
MIL-C-13924	-	Coating, Oxide Black for Ferrous Metals
MIL-L-17507	-	Lace, Ornamental
MIL-B-17757	-	Boxes, Shipping, Fiberboard (Modular Sizes)

STANDARDS

FEDERAL

FED-STD-151	-	Metals, Test Methods
FED-STD-311	-	Leather, Methods of Sampling and Testing
FED-STD-595	-	Colors
FED-STD-751	-	Stitches, Seams, and Stitchings

MILITARY

MIL-STD-105	-	Sampling Procedures and Tables for Inspection by Attributes
MIL-STD-129	-	Marking for Shipment and Storage

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T10:23Z
Check the source to verify that this is the current version before use.

(Copies of specifications, standards, drawings, and publications required by contractors in connection with specific procurement functions should be obtained from the procuring activity or as directed by the contracting officer.)

LAWS AND REGULATIONS

U.S. POSTAL SERVICE MANUAL

(Copies of the manual may be obtained from the Superintendent of Documents, U.S. Government Printing Office, Washington, D.C. 20402)

Other publications. The following documents form a part of this specification to the extent specified herein. Unless otherwise indicated, the issues in effect on date of invitation for bids or request for proposal shall apply.

NATIONAL MOTOR FREIGHT TRAFFIC ASSOCIATION, INC., AGENT

National Motor Freight Classification

(Application for copies shall be addressed to the American Trucking Association, Inc., Traffic Department, 1616 P. Street, N.W., Washington, D.C. 20036.

UNIFORM CLASSIFICATION COMMITTEE, AGENT

Uniform Freight Classification

(Application for copies shall be addressed to the Uniform Classification Committee, Room 1106, 222 South Riverside Plaza, Chicago, IL 60606).

3. REQUIREMENTS

3.1 Guide samples. When furnished, are solely for guidance and information to the contractor (see 6.3). Variations from this specification may appear in the sample, in which case this specification shall govern.

3.2 First article . When specified, the contractor shall furnish sample unit(s) for first article inspection and approval (see 4.3 and 6.2).

3.3 Materials.

3.3.1 Gold Lace. The gold lace used for the type I chin strap shall contain two vellums and shall conform to type II, classes 1, 2, 3, 4, or 5 as specified, (see 6.2), style A, of MIL-L-17507, except that colorfastness to salt water and soap and dry/wet heat shall not apply. When type I, class 2 chin straps are procured, Lace Type II, class 3, 4, or 5 of MIL-C-17507 shall apply.

3.3.2 Vinyl. The vinyl used for the type III chin strap shall conform to type II, class 2 of L-P-375 for finish, odor, and workmanship. All other requirements of L-P-375 shall not apply. The material shall be pigmented black, approximating shade No. 17038 of FED-STD-595, and shall be extruded to a thickness of 0.060 $\pm$ (0.006) inches.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T10:23Z
Check the source to verify that this is the current version before use.

*3.3.3 Patent Leather. The patent leather used for the type IV chin strap shall be of a grain split cowhide with a black polyurethane finish on the grain side to produce a smooth polished surface (see 4.4.1). The finished leather shall be not less than 3 ounces nor greater than 4 ounces when tested as specified in 4.4.1.

* 3.3.4 Plastic sheeting (non-rigid). The plastic sheeting used for the type V chin strap, shall be of a non-rigid properly plasticized vinyl pigmented black approximating shade no 27038 of FED-STD-595, and shall show no stiffening, cracking, flaking, or tackiness when tested as specified in 4.4.1. The plastic sheeting shall be press-polished on one side, and shall be 0.020 (± 0.002) inch in thickness when tested as specified in 4.4.1.

3.3.5 Latex impregnated paperboard. The latex impregnated paperboard used for the backing on types I and V chin straps, shall consist of a high alpha cellulose vegetable fiber impregnated with a minimum of 26 percent neoprene. The paperboard shall be natural or black in color, and shall have a thickness of 0.035 (± 0.005) inches and a weight of 1.0 lb/sq. yd. when tested as specified in 4.4.1.

3.3.6 Thread, cotton. The thread used for the type I chin strap shall be cotton, conforming to type IC2; 3 ply; ticket number 00; of V-T-276. The thread shall be dyed to match gold TX, cable no. 66087.

3.3.6.1 Colorfastness. The dyed thread shall show colorfastness to light, wet-dry cleaning, and perspiration equal to or better than the standard sample when tested as specified in V-T-276. When no standard sample is available, the dyed thread shall show a minimum of "good" fastness to light, wet-dry cleaning, and perspiration when tested as specified in V-T-276.

3.3.7 Eyelets. The eyelets used for type I chin strap shall be made of brass, with an inside diameter of not less than 1/4 inch and an outside diameter of not more than 3/8 inch (see 4.3.1). The eyelets shall be nickel plated, suitable for the purpose intended.

* 3.3.7 Rivet. The rivet used to secure the loop to the top slide for types III, IV, and V chin straps, shall be made of brass or steel, round or oval head, 5/32 (± 1/32) inch head diameter, 1/4 (± 1/32) inch in length, and shall have a black chemical finish in accordance with MIL-F-495 or MIL-C-13924, respectively. As an alternate the color may be black enamel approximating shade no 27038 of FED-STD-595.

3.3.9 Staples. The staples used to secure the loops on type III, IV, and V chin straps shall be made of a carbon steel or stainless steel wire, 0.025 (± 0.005) inch in thickness. If ordinary carbon steel is used, it shall have a non-corrosive finish capable of withstanding not less than 25 hours of the salt spray test when tested as specified in 4.4.1.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T10:23Z
Check the source to verify that this is the current version before use.

3.4 Design

3.4.1 Type I - Gold Lace Chin Strap. The type I gold lace chin strap shall be of a two piece, interlocking extension type, consisting of a top slide (one piece) pointed on both ends and a bottom slide (with extension piece) pointed on both ends, backed with latex impregnated paperboard. The finished assembled chin strap (see figure 1) shall have a gold lace loop and a metal eyelet attached to each end. The gold lace loops shall not have a latex impregnated paperboard backing.

3.4.2 Type III Vinyl Chin Strap. The type III vinyl chin strap shall be of a two piece, interlocking extension type, consisting of a top slide, bottom slide, and loops that shall have beaded roll edges approximately 1/16 inch wide each. The finished assembled chin strap (see figure 1) shall have each slide rounded on the end where the hole is positioned and square on the end that is attached to the loop.

3.4.3 Type IV - Patent leather Chin Strap. The type IV patent leather chin strap shall be of a two piece, interlocking extension type, consisting of a top and bottom slide with a simulated stitch effect approximately 1/16 inch in from each outside edge, and plain patent leather loops. The finished assembled chin strap (see figure 1) shall have each slide rounded on the end where the hole is positioned and square on the end that is attached to the loop. The square ends shall show no evidence of finish omitted.

3.4.4 Type V - Plastic sheeting Chin Strap. The type V plastic sheeting chin strap shall be of a two piece, interlocking extension type, consisting of a top and bottom slide with a simulated stitch effect approximately 1/16 inch in from each outside edge and backed with latex impregnated paperboard and plain plastic sheeting loops. The finished assembled chin strap (see figure 1) shall have each slide rounded on the end where the hole is positioned and square on the end that is attached to the loop. The loops shall not have a latex impregnated paperboard backing.

3.4.5 Figure. Figure 1 is furnished for information purposes only. To the extent of any inconsistencies between the written specification and the figure, the written specification shall govern.

3.5 Construction.

3.5.1 Stitches, seams, and stitching. Stitch, seam, and stitching types specified in Table I shall conform to FED-STD-751.

3.5.2 Stitches per inch. The minimum and maximum stitches per inch shall be as specified in Table I.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T10:23Z
Check the source to verify that this is the current version before use.

3.6 Manufacturing operation requirements. The chin straps shall be manufactured in accordance with operation requirements specified in table I. The Contractor is not required to follow the exact sequence of operations as listed, provided that the finished chin straps are identical to those produced by following the sequence of operations listed in table I.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T10:23Z
Check the source to verify that this is the current version before use.

Table I - Construction of Chin Straps

No.	Description of Operation	Stitch Type	Seam and Stitching Type	Stitches Per Inch	Thread	
					Needle	Bobbin or Looper
1.	Assembly of type I gold lace chin strap a. The finished length of the top slide shall be 9 3/8 (± 1/4) inch. The finished length of the bottom slide including extension piece shall be 9 3/8 (± 1/4) inch. The width of backing and loops shall be the same as the width of the lace.					
	b. Stitch the gold lace to the latex impregnated paperboard backing along each lengthwise edge not less than 1/16 inch from edge.	301	SSa-1	12-16	00	00
	c. Turn the gold lace under at each pointed end and stitch not less than 1/16 inch from the edge.	301	SSb-1	12-16	00	00
	d. Attach eyelet on one end of slide to finish 3/8 (± 1/16) inch from the pointed end to center of the eyelet.					
	e. For top slide - center an open loop on opposite end of slide and stitch 3/8 (± 1/16) inch from the pointed end. NOTE: The finished chin strap shall freely slide thru loop.	301	LSa-1	12-16	00	00
	f. Close loop with no less than 4 hand stitches	Hand	LSb-1		00	
	g. For bottom slide - cut extension piece (from slide at loop end) of sufficient length. Position extension piece and slide to loop and stitch. NOTE: The finished chin strap shall freely slide thru loop.	301	LSa-1	12-16	00	00

NCTR Form 1, 15 Sep 1967

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T10:23Z
Check the source to verify that this is the current version before use.

Table I - Construction of Chin Straps (cont'd)

No.	Description of Operation	Stitch Type	Seam and Stitching Type	Stitches Per Inch	Thread	
					Needle	Bobbin or Looper
1.	Assembly of type I gold lace chin strap (cont.)					
	h. Close loop.	Hand	LSb-1		00	
	i. Insert the topslide thru the bottom slide loop and the bottom slide thru the top slide loop.					
2.	Assembly of type III, IV, and V Chin Strap					
	a. The finished length of the top and bottom slide shall be 9 1/2 (± 1/4) inch. The width of the loops shall be the same as the width of the chin strap.					
	b. Pierce a 7/32 (± 1/64) inch diameter hole at end of slide, 3/8 ± 1/16 inch from end to centerline of hole.					
	c. For top slide-position and rivet one loop to the top slide 1/4 (± 1/16) inch from square end to center of rivet. Close loop with two staples.					
	d. For bottom slide-position and staple closed one loop to the bottom slide (1/4 ± 1/16) inch.					
	e. Insert the top slide thru the bottom slide loop and the bottom slide thru the top slide loop.					

NCTR Form 1, 15 Sep 1967

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T10:23Z
Check the source to verify that this is the current version before use.

3.7 Workmanship. The finished chin straps shall conform to the quality established by this specification. The occurrence of defects shall not exceed the applicable acceptable quality levels.

4. QUALITY ASSURANCE PROVISIONS

4.1 Responsibility for inspection. Unless otherwise specified in the contract, the contractor is responsible for the performance of all inspection requirements as specified herein. Except as otherwise specified in the contract, the contractor may utilize his own or any other facilities suitable for the performance of the inspection requirements specified herein, unless disapproved by the Government. The Government reserves the right to perform any of the inspections set forth in the specification where such inspections are deemed necessary to assure supplies and services conform to prescribed requirements.

4.1.1 Certificate of compliance. Where certificates of compliance are submitted, the Government reserves the right to check test such items to determine the validity of the certification.

* 4.2 Classification of inspection. The inspection requirements specified herein are classified as follows:

1. First article inspection (see 4.3).
2. Quality conformance inspection (see 4.4).

4.3 First article inspection. The first article submitted in accordance with 3.2 shall be inspected as specified in 4.4.2 for compliance with design, construction, workmanship and dimensional requirements.

4.4 Quality conformance inspection. Inspection shall be in accordance with the provisions set forth in MIL-STD-105, except where otherwise indicated herein.

4.4.1 Component and material inspection. In accordance with 4.1 above, components and materials shall be tested in accordance with all the requirements of referenced specifications, drawings, and standards unless otherwise excluded, amended, modified, or qualified in this specification or applicable purchase document. In addition, testing shall be performed on the components listed in table III for the characteristics specified. Where the "determinations per sample unit" and "results reported as" are not specified, they shall be as indicated in the applicable test method. All requirements are applicable to the sample unit. All test reports shall contain the individual values used in expressing the final results. The unit for expressing the lot size and sample unit shall be as indicated in table II. The lot shall be unacceptable if one or more sample units fail to meet any test requirement specified. The sample size shall be in accordance with table II.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T10:23Z
Check the source to verify that this is the current version before use.

Table II Sample Size

Lot Size	Sample Size
800 or less	2
801 up to and including 22,000	3
22,001 and over	5

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T10:23Z
Check the source to verify that this is the current version before use.

Table III - Component tests

Component (Lot size)	Characteristic	Requirement paragraph	Test method	Determinations per sample unit	Results reported as Pass or Fail	Results reported as Numerical average To Nearest	Sample unit
Patent leather (One side or skin)	Material identification	3.3.3	1/	-	-	-	one piece (8" x 8")
	Finish	3.3.3	1/	-	-	-	
	Thickness	3.3.3	FED-STD-311 Method 1011	-	-	-	
Plastic sheet (sheets or rolls)	Material identification	3.3.4	1/	-	-	-	
	Stiffness and tackiness resistance	3.3.4	4.4.1.1	2	X	-	One piece (4' x 4')
	Cracking and flaking resistance	3.3.4	4.4.1.2	2	X	-	
	Thickness	3.3.4	Micrometer	3	-	(0.001 inch)	
Latex impregnated paperboard (One sheet)	Material identification	3.3.5	1/	-	-	-	5 sheets
	Neoprene content	3.3.5	1/ UU-P-31	-	-	-	
	Thickness	3.3.5	Method 173	-	-	(0.001 inch)	
	Weight	3.3.5	Method 110	-	-	-	
Eyelets (Gross)	Material identification	3.3.7	1/	-	-	-	10 eyelets
	Nickel plated	3.3.7	1/	-	-	-	
	Diameter (inside and outside)	3.3.7	Gage	-		(1/32 inch)	

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T10:23Z
Check the source to verify that this is the current version before use.

Table III - Component tests (cont'd)

Component (lot size)	Characteristic	Requirment paragraph	Test method	Determinations per sample unit	Results reported as Pass or Fail	Results reported as Numerical Average To nearest	Sample Unit
Rivet (Gross)	Material identification	3.3.8	1/	-	-	-	10 rivets
	Finish	3.3.8	1/	-	-	-	
	Diameter and Length	3.3.8	Gage	5	-	(1/32)	
Staples (Gross)	Material identification	3.3.9	1/	-	-	-	10 staples
	Wire thickness	3.3.9	Micrometer	1	X	-	
	Corrosion resistance (ordinary carbon steel)	3.3.9	FED-STD-151 method 811	-	-	-	

1/ A certificate of compliance will be acceptable for this requirement.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T10:23Z
Check the source to verify that this is the current version before use.

4.4.1.1 Stiffness and tackiness test. A 2 inch by 4 inch test specimen of the unsupported plastic shall be doubled, face to face, placed between two glass plates, weighted with a 1 pound weight, and heated for 30 minutes at 180¼F in a thermostatically controlled oven. After allowing 5 minutes for cooling, the surface shall be examined for any evidence of stiffening or tackiness.

4.4.1.2 Cracking and flaking test. Samples of the unsupported plastic sheeting shall be placed in an atmosphere of minus 20¼F for 2 hours, and then tested at that temperature by folding face outward and creasing sharply. The plastic sheeting shall show no sign of cracking or flaking.

4.4.2 Examination of the end item. The defects found during the examination of the end item shall be classified in accordance with 4.4.2.1 and 4.4.2.2. The applicable inspection levels and acceptable quality levels (AQL's) shall be as indicated in 4.4.2.3. The sample unit shall be one completely fabricated chin strap. The lot size shall be expressed in terms of one specified type strap submitted for inspection.

4.4.2.1 Visual examination -

Examine	Defect	Classification Major	Minor
MATERIAL			
(Gold lace)	Not type of material specified	X	
	Any hole, cut, tear or rip	X	
	Any spot or stain	X	
	Abrasion mark	X	
	Any part shaded or variation in shade Within the lace	X	
	Any broken or missing yarn	X	
(Vinyl)	Not type of material specified	X	
	Any hole, cut, blister, crack or crease, tear or rip	X	
	Color not as specified		X
	Not uniformly extruded to specified thickness	X	

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T10:23Z
Check the source to verify that this is the current version before use.

Examine	Defect	Classification Major	Minor
MATERIAL (cont'd)			
(Patent leather)	Not type of leather specified	X	
	Any hole, cut, tear or rip, open scratch	X	
	Loose or spongy leather	X	
	Color or finish not as specified		X
	Finished leather on grain side not smooth and polished		X
(Plastic sheeting)	Not type of material specified	X	
	Any hole, cut, blister, crack or crease, tear or rip	X	
	Color not as specified		X
	Not press-polished on exposed top side		X
(Strap backing, latex impregnated paperboard)	Not type of material specified	X	
	Any hole, cut, crack or crease, tear or rip	X	
	Color not as specified		X
HARDWARE			
(Eyelets Rivets Staples)	Not type of material specified	X	
	Any omitted, split, insecurely attached, improperly located	X	
	Any malformed		X
	Finish omitted	X	
	Color or finish not as specified		X
	Evidence of finish peeling, blistering, or flaking		X

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T10:23Z
Check the source to verify that this is the current version before use.

Examine	Defect	Classification Major	Minor
SEAMS AND STITCHINGS			
	Not specified seam or stitch type	X	
	Gage or margin of stitching irregular or not as specified		X
	Any open seam	X	
	NOTE: The seam shall be classified open when one or more stitches joining a seam or a line of stitching are broken or when two or more continuous skipped or runoff stitches occur.		
	Loose tension resulting in a loose seam	X	
	One stitch per inch less than specified		X
	Two or more stitches per inch less than specified	X	
	More than the specified maximum number of stitches per inch, resulting in damage to assembly	X	
	More than the specified maximum number of stitches per inch, but not damaging assembly		X
COMPONENTS AND ASSEMBLY	Any component part or operation omitted (unless otherwise classified herein)	X	
	Any operation not as specified (unless otherwise classified herein)	X	
	Not two piece interlocking extension type	X	
	Any loop misplaced, incorrectly made, or insecurely attached by hand stitching or stapling	X	
	Any square end of loop showing finish omitted		X
	Gold lace or plastic sheeting extends beyond width of strap backing	X	
	Gold lace or plastic sheeting does not completely cover the face of strap backing	X	
	Holes not pierced out as specified	X	
	Ends of top or bottom slides not shaped as specified		X

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T10:23Z
Check the source to verify that this is the current version before use.

Examine	Defect	Classification Major	Minor
COMPONENTS AND ASSEMBLY (cont'd)	Type III vinyl top and bottom slides not beaded on outside edges as specified	X	
	Type IV and V not having a simulated stitch effect on outside edges of top and bottom slides as specified	X	

4.4.2.2 Dimensional examination. The chin straps shall be examined for dimensional defects in accordance with the following:

a. For type I chin strap, the finished length of the top and bottom slides less than 9 1/8 inches or more than 9 5/8 inches shall be scored as a measurement defect.

b. For types III, IV, and V chin straps, the finished length of the top and bottom slide less than 9 1/4 inches or more than 9 3/4 inches shall be scored as a measurement defect.

4.4.2.3 Inspection levels and acceptable quality levels (AQL's). The inspection levels, expressed in defects per 100 units for visual and dimensional examination, shall be as follows:

	Inspection Level	AQL's Major	Total
For defects applicable to 4.4.2.1	II	2.5	6.5
For defects applicable to 4.4.2.2	S-3	-	4.0

4.4.3 Examination of Packaging requirements. An examination shall be made to determine that packaging, packing, and marking complies with the Section 5 requirements of this specification. Defects shall be scored in accordance with the list below. The sample unit shall be one shipping container fully prepared for delivery except that it need not be closed. Defects of closure listed below shall be examined on shipping containers fully prepared for delivery. The lot size shall be the number of shipping containers in the end item inspection lot. The inspection level shall be S-2 and the AQL shall be 2.5 defects per 100 units.

Examine	Defect
Marking (exterior and interior)	Omitted, incorrect, illegible, of improper size, location, sequence or method of application
Materials	Any component missing, damaged, or not as specified

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T10:23Z
Check the source to verify that this is the current version before use.

Examine	Defect
Workmanship	Inadequate application of components, such as incomplete closure of container flaps, improper taping, loose strapping, inadequate stapling, polyethylene tube not completely sealed. Open and non-continuous heat sealed seams and closure of polyethylene tubes and bags.
Content	Number of intermediate packages per shipping container is more or less than required. 1/

1/ For the defect, two intermediate packages shall be examined from each shipping container in the sample.

5. PACKAGING

5.1 Preservation-Packaging. Packaging shall be level A or C as specified (see 6.2).

5.1.1 Level A. Eighty (80) chin straps, each extended to approximately 11 inches in length, of one type and class only, shall be packaged in a set up white paperboard box conforming to type I or II, variety I, class C or D, style 4, of PPP-B-676; or in a folding white paperboard box conforming to variety 1, style III, type G, class i or j, sub-class 2 of PPP-B-566. The telescope box lid shall be not less than 7/8 inch in depth. The approximate finished outside dimension of the container shall be 11 1/2 inches in length, 7 inches in width, and 3 inches in depth. Closure shall be accomplished by commercial grade gummed paper tape.

5.1.2 Level C - (Commercial packaging). Chin straps shall be packaged to afford adequate protection against physical damage during shipment from the contractor to the first receiving activity. The package and the quantity per package shall be the same as that normally used by the contractor for retail distribution.

5.2 Packing. Packing shall be level A, B, or C as specified (see 6.2).

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T10:23Z
Check the source to verify that this is the current version before use.

5.2.1 Level A. Four hundred chin straps of one type or class only, packaged as specified in 5.1, shall be packed in a fiberboard shipping container assembled and closed conforming to class weather-resistant, grade V2s, size 1, of MIL-B-17757. Level A packages shall be packed on their side, five in length within a shipping container.

5.2.2 Level B. Four hundred chin straps of one type and class only, packaged as specified in 5.1, shall be packed in a fiberboard shipping container assembled and closed conforming to class domestic, grade 200, size 1, of MIL-B-17757. Level A packages shall be packed on their side, five in length within a shipping container.

5.2.2.1 When specified, (see 6.2), the shipping container shall be a grade V3c, W5c, or W6c fiberboard box fabricated in accordance with MIL-B-17757 and closed in accordance with the appendix of the box specification.

5.2.3 Level C (Commercial packing) Chin straps packaged as specified in 5.1, shall be packed in a manner to insure carrier acceptance and safe delivery at destination at the lowest transportation rate for such supplies. The quantity per shipping container shall be the same as that normally used by the contractor for retail distribution. Containers shall comply with the US Postal Service Manual, Uniform Freight Classification Rules, or National Motor Freight Classification Rules, as applicable.

5.3 Marking. In addition to any special marking required by the contract or order, interior packages and shipping containers shall be marked in accordance with MIL-STD-129.

6. NOTES

6.1 Intended use. Type I chin straps are intended for use by Warrant Officers (W-1), Naval Academy Midshipmen, Naval Reserve Officers, Naval Aviation Cadets, Commissioned Officers, and Commissioned Warrant Officers. Types III, IV, and V chin straps are intended for use by Chief Petty Officers, Junior Naval Reserve Officers Training Corps and enlisted personnel.

6.2 Ordering data. Procurement documents should specify the following:

a. Title, number, and date of this specification.
b. Type, class, and material (see 3.3.1)
c. Whether first article sample is required (see 3.2).
d. Selection of the applicable levels of packaging and packing (see 5.1 and 5.2).
e. When weather-resistant grade fiberboard shipping containers are required for level B packing (see 5.2.2.1).

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T10:23Z
Check the source to verify that this is the current version before use.


6.3 Samples. For access to samples, address the procuring office issuing the invitation for bids.

Custodian:
Navy - NU
User activity:
Navy - CG


Preparing Activity:
Navy - NU
Project No. 8405-N712

Review activity:
DLA-CT


Source: https://assist.dla.mil -- Downloaded: 2026-10-18T10:23Z
Check the source to verify that this is the current version before use.

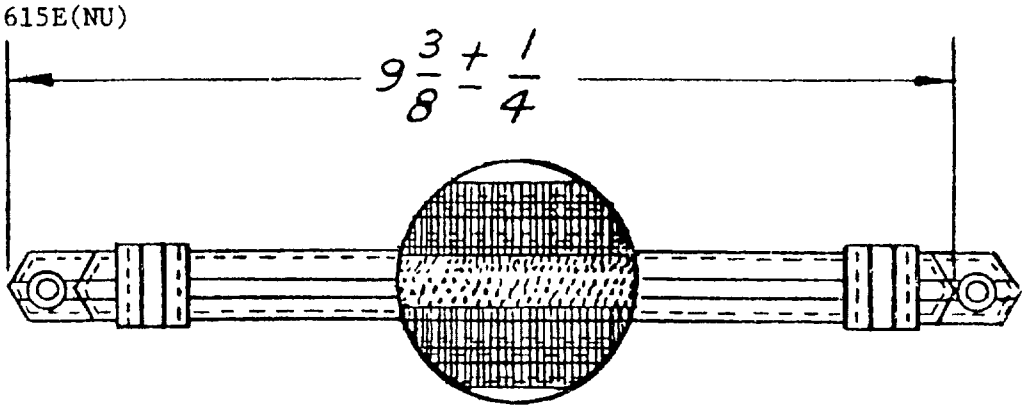


TYPE I

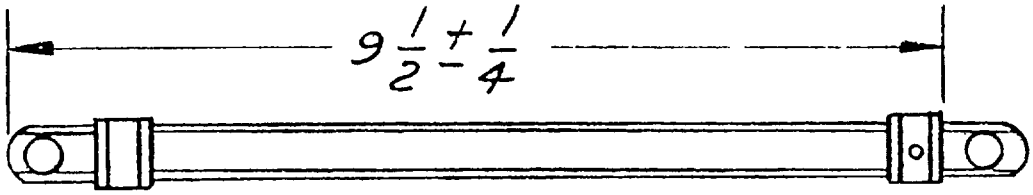

TYPE III

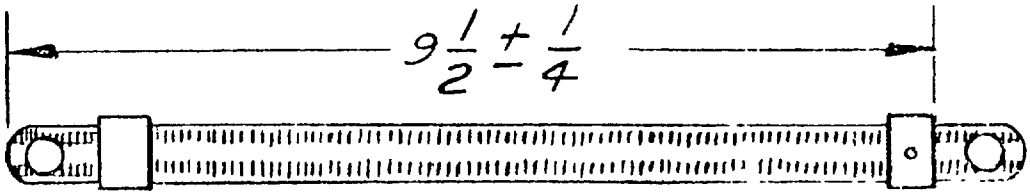

TYPE IV

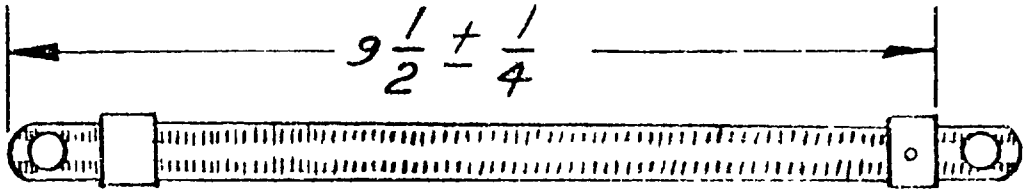

TYPE V

FIGURE 1

STRAP CHIN (NAVY AND COAST GUARD)

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T10:23Z
Check the source to verify that this is the current version before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

INSTRUCTIONS This form is provided to solicit beneficial comments which may improve this document and enhance its use DoD contractors, government activities, manufacturers, vendors, or other prospective users of the document are invited to submit comments to the government Fold on lines on reverse side, staple in corner, and send to preparing activity Attach any pertinent data which may be of use in improving this document If there are additional papers attach to form and place both in an envelope addressed to preparing activity A response will be provided to the submitter, when name and address is provided, within 30 days indicating that the 1426 was received and when any appropriate action on it will be completed

NOTE This form shall not be used to submit requests for waivers, deviations or clarification of specification requirements on current contracts Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document(s) or to amend contractual requirements

DOCUMENT IDENTIFIER *(Number)* AND TITLE

MIL-S-17615E(NU) STRAP, CHIN (NAVY AND COAST GUARD)

NAME OF ORGANIZATION AND ADDRESS OF SUBMITTER

☐ VENDOR ☐ USER ☐ MANUFACTURER

1 ☐ HAS ANY PART OF THE DOCUMENT CREATED PROBLEMS OR REQUIRED INTERPRETATION IN PROCUREMENT USE? ☐ IS ANY PART OF IT TOO RIGID RESTRICTIVE, LOOSE OR AMBIGUOUS? PLEASE EXPLAIN BELOW

A GIVE PARAGRAPH NUMBER AND WORDING

B RECOMMENDED WORDING CHANGE

C REASON FOR RECOMMENDED CHANGE(S)

2 REMARKS

SUBMITTED BY *(Printed or typed name and address — Optional)*

TELEPHONE NO

DATE

DD FORM 1 OCT 76 1426 Replaces edition of 1 Jan 72 which may be used S/N 0102-LF-001-4260

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T10:23Z
Check the source to verify that this is the current version before use.

FOLD

OFFICER IN CHARGE
NAVY CLOTHING & TEXTILE RESEARCH FACILITY
21 STRATHMORE ROAD
NATICK, MA 01760

OFFICIAL BUSINESS
PENALTY FOR PRIVATE USE $300

POSTAGE AND FEES PAID
DEPARTMENT OF THE NAVY
DoD 316

U.S.MAIL

OFFICER IN CHARGE
NAVY CLOTHING & TEXTILE RESEARCH FACILITY
21 STRATHMORE ROAD
NATICK, MA 01760

FOLD

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T10:23Z
Check the source to verify that this is the current version before use.