MIL-U-17658D(SA)
21 February 1975
SUPERSEDING
MIL-U-17658C(SA)
17 May 1971

MILITARY SPECIFICATION

UNIFORM, MAN'S (DRESS, WHITE)

This specification is approved for use by all Departments and Agencies of the Department of Defense.

1. SCOPE

1.1 Scope.- This specification covers the requirements for a white polyester/cotton service uniform consisting of a coat and trousers.

1.2 Classification.- The uniform shall be of one type only and in the following sizes and lengths, as specified (see 6.2):

Sizes:

Coats.- 34, 35, 36, 37, 38, 39, 40, 41, 42, 43, 44, 45, 46, 47 and 48

Trousers.- 28, 29, 30, 31, 32, 33, 34, 35, 36, 37, 38, 39, 40, 41 and 42

Lengths: Short, regular, long, and extra long

2. APPLICABLE DOCUMENTS

2.1 The following documents of the issue in effect on date of invitation for bids or request for proposal form a part of this specification to the extent specified herein:

SPECIFICATIONS

FEDERAL

V-B-871	- Button, Sewing Hole, and Button, Staple (Plastic)
V-F-106	- Fasteners, Slide, Interlocking
V-T-276	- Thread, Cotton
V-T-280	- Thread, Cotton Gimp, Buttonhole
V-T-295	- Thread, Nylon
CCC-C-430	- Cloth, Sheeting, Cotton, and Polyester and Cotton
CCC-C-438	- Cloth, Buckram, Cotton
DDD-B-1199	- Binding, Textile, Cotton, Bias-Cut
DDD-L-20	- Label; For Clothing, Equipage, and Tentage (General Use)
DDD-T-86	- Tape, Textile; Cotton, General Purpose (Unbleached, Bleached or Dyed)

FSC 8405

Source: https://assist.dla.mil -- Downloaded: 202610-18T10:26Z
Check the source to verify that this is the current version before use.

MILITARY

MIL-C-326 - Cloth, Silesia, Cotton
MIL-B-17757 - Boxes, Fiberboard, Corrugated (Modular Sizes)
MIL-C-29127 - Cloth, Twill, Polyester/Cotton (Crease-Resistant Finish)
MIL-T-43548 - Thread, Polyester, Cotton-Covered
MIL-C-43718 - Cloth, Twill, Polyester; Polyester/Cotton, Polyester/Rayon

STANDARDS

FEDERAL

FED-STD-751 - Stitches, Seams, and Stitchings

MILITARY

MIL-STD-105 - Sampling Procedures and Tables for Inspection by Attributes
MIL-STD-129 - Marking for Shipment and Storage
MIL-STD-1488 - Provisions for Evaluating Quality of Trousers
MIL-STD-1490 - Provisions for Evaluating Quality of Coats, Men's, Dress

(Copies of specifications, standards, drawings, and publications required by suppliers in connection with specific procurement functions should be obtained from the procuring activity or as directed by the contracting officer.)

LAWS AND REGULATIONS

U.S. POSTAL SERVICE MANUAL

(Copies of the manual may be obtained from the Superintendent of Documents, U.S. Government Printing Office, Washington, D. C. 20402.)

2.2 Other publications.- The following documents form a part of this specification to the extent specified herein. Unless a specific issue is identified, the issues in effect on date of invitation for bids or request for proposal shall apply:

NATIONAL MOTOR FREIGHT TRAFFIC ASSOCIATION, INC., AGENT
National Motor Freight Classification

(Application for copies should be addressed to American Trucking Associations, Inc., Tariff Order Section, 1616 P Street, N.W., Washington, D. C. 20036.)

Source: https://assist.dla.mil -- Downloaded: 202610-18T10:26Z
Check the source to verify that this is the current version before use.

UNIFORM CLASSIFICATION COMMITTEE, AGENT
Uniform Freight Classification

(Application for copies should be addressed to the Uniform Classification Committee, Room 1106, 222 South Riverside Plaza, Chicago, Illinois 60606.)

3. REQUIREMENTS

3.1 Guide sample.- Guide samples, when furnished, are solely for guidance and information to the supplier (see 6.3). Variation from this specification may appear in the sample, in which case this specification shall govern.

3.2 First article approval.- The requirement for First Article will be as specified by the Procuring Activity (see 6.2).

3.3 Materials.-

3.3.1 Basic material.- The basic material for the coat and trousers shall be a polyester/cotton, crease-resistant finish, twill fabric, shade white 3053 conforming to class 2 of MIL-C-29127.

3.3.1.1 Waistband lining.- The material for the waistband lining and right fly lining shall be the basic cloth or cotton silesia, conforming to type I of MIL-C-326 or twill cloth conforming to class 1 of MIL-C-43718. The material shall be bleached white.

3.3.1.2 Buckram.- The material for interlining waistband linings made of cotton silesia or twill cloth shall be cotton buckram, bleached white, conforming to type II, class 1 of CCC-C-438.

3.3.2 Sheeting, cotton or polyester/cotton.- The sheeting used for interlining the right coat front facing shall conform to type II, class 2, style A or style F of CCC-C-430.

3.3.3 Binding, cotton.- The material used for binding the seams shall be cotton, bias-cut, 7/8 to 1 inch wide, conforming to type IV, class 1 of DDD-B-1199.

3.3.4 Tape, cotton.- The tape used for the hanger loop and staying the front coat edges shall be 3/8 inch wide and for covering the collar hooks, 5/8 inch wide. The tape shall conform to type I, class 2 of DDD-T-86.

3.3.5 Thread.-

3.3.5.1 Thread, cotton gimp.- The cotton gimp used for reinforcing the buttonholes shall be bleached to match shade White AH, Cable No. 66050 and shall conform tc type I or II, size No. 8 of V-T-280.

Source: https://assist.dla.mil -- Downloaded: 202610-18T10:26Z
Check the source to verify that this is the current version before use.

3.3.5.2 Thread, cotton.- The cotton thread used for stitching and seaming shall be bleached to match shade White AH, Cable No. 66050 and conform to V-T-276, as follows:

Use	Type	Ticket No.	Ply
General seaming	IA2	40, 50	3
General overedging	IA2	70	2
Bartacks and buttonholes	IC1	B, A	3
Buttons	IA2	16, 20	4

3.3.5.3 Thread, polyester, cotton-covered.- As an alternate to the cotton thread, a polyester, cotton-covered thread bleached to match shade White AH, Cable No. 66050 conforming to MIL-T-43548 in the following sizes may be used:

Use	Ticket No.	Ply
Seaming and tacking	40, 50	2 or 3
Overedging	70	2
Button		
Hand	16	2 or 3
Machine	20	2 or 3

3.3.5.4 Thread, nylon.- The nylon thread used in a machine that automatically sews and shanks (wraps) buttons in one operation shall be waxed nylon monocord special No. 5 having a minimum breaking strength of 16 pounds, a minimum lengt per pound of 2150 yards, and shall be tested for these requirements in accordance with V-T-295.

3.3.6 Composition button.- The button for the left hip pocket shall be plastic sewing hole type, 22-line conforming to type II, class D, style 4 of V-B-871. The color of the button shall be White shade BA, Cable No. 62031.

3.3.7 Hooks and eyes.- The hooks and eyes for fastening the coat collar and trouser waistband (see 4.1.1 and 4.3.1) shall be as follows:

Collar - Sew-on type, commercial size number 4, nickel plated finish or functionally interchangeable equivalent.

Waistband - Staple-on type North and Judd (Hook Flex H-49, K-50, H-89, and E-90); Universal Button Co. (Talon #3, #7, and #8 hook with #8 eye or #85 eye); Akim Co. or Patwin, Inc., Junior Series, type JB; Stimpson (P-536, D-4086, D-4457, D-4288); Rau (0A50, 0X1256, 080415); Patwin, Inc. (Slim-Slak with MB eye and Slik-Slak) or functionally interchangeable equivalent. The finish shall be nickel plate.

Source: https://assist.dla.mil -- Downloaded: 202610-18T10:26Z
Check the source to verify that this is the current version before use.

3.3.8 Slide fastener.- The slide fastener for closing the fly shall be type I, style 1, cam lock, size LMS, short tab pull of V-F-106, except that all metal components of the slide fastener shall be fabricated of brass and purchased from the same supplier (see 4.3.1). A staple bottom stop is required. The slide fastener tape shall match the shade of the basic cloth.

3.3.9 Labels.-

3.3.9.1 Combination label.- Each coat and trousers shall have a combination size, identification and personnel label conforming to type I, classes 1, 2 and 10 of DDD-L-20. The fastness to laundering requirements of DDD-L-20 shall apply. The label shall bear the following inscription:

NAME:
SERVICE NO.:
UNIFORM, MAN'S (DRESS, WHITE)
FIBER CONTENT: Polyester (50%) and Cotton (50%)
CONTRACT NO.: DSA 100-00-0-0000 (Example)
STOCK NO.: 8405-00-000-0000 (Example)
SIZE: 38R (Example for Coat)
SIZE: WAIST 32 (Example for Trousers)
NAME OF SUPPLIER:

3.3.9.2 Size label.- Each pair of trousers shall have a size label conforming to type I, class 2 of DDD-L-20. The fastness to laundering requirements of DDD-L-20 shall apply. The label shall bear the following inscription:

SIZE: 32R (Example)
STOCK NO.: 8405-00-000-0000 (Example)

3.3.9.3 Size ticket (Uniform).- Each coat and trouser shall have a size ticket which shall be made of suitable commercial cardboard and shall measure not less than 2-1/8 by 1-1/4 inches. The corners may be double perforated for ease in tacking. The ticket shall be legibly printed with the following information:

UNIFORM, MAN'S (DRESS, WHITE)
COAT: 38R (Example)
TROUSER: 32R (Example)
SHADE (MATCHING NUMBERS)

3.3.9.3.1 Size ticket printing.- The item and model nomenclature (coat and trousers) shall be in letters and numerals not less than 1/8 inch in height. The model may be designated as S, R, L or XL. The size shall be in numerals not less than 3/16 inch in height. The matching shade numbers shall be in letters and numerals not less than 1/16 inch in height.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T10:26Z
Check the source to verify that this is the current version before use.

3.3.9.3.2 Size ticket position.- The coat size ticket shall be tacked on the outside of right front sleeve 2 to 3 inches from bottom edge. The trousers size ticket shall be tacked to the outside of waistband above right back pocket between the two belt loops. The tickets shall be tacked on four corners by machine (6 to 8 stitches per tack) or by hand (2 to 3 stitches per tack).

3.4 Design.-

3.4.1 Coat.- The coat shall be single-breasted with eyelets for five detachable Navy eagle gilt buttons on right front, stand-up collar with hooks-and-eyes closure, form fitting four piece back with center back seam, two outer breast patch pockets with flaps and eyelets for detachable Navy eagle gilt buttons, two shoulder loops on each shoulder, and a sword slit in the left side (see Figure 1).

3.4.2 Trousers.- The trousers shall be of a single needle construction and conventional design. It shall have a separate waistband, slide fastener, inseam and seat seam outlets, two straight side pockets, two double welt hip pockets with button and buttonhole closure on left hip pocket. It shall have seven belt loops up to and including size 37; an extra belt loop shall be added for size 38 and upward. Leg bottoms shall be unhemmed (see Figures 2 through 6).

3.4.3 Figures.- The figures are furnished for information purposes only. When inconsistencies exist between the written specification and the figures, the written specification shall govern.

3.5 Patterns.- Standard patterns to be used for cutting working patterns will be furnished by the Government (see 6.3). The working patterns shall be identical to the Government patterns which shall not be altered in any way. The patterns provide a 3/8 inch seam allowance for regular seams. The seat seam allowance shall be 1-1/4 inches at the top tapering to 3/8 inch at the bottom. The inseam allowance of the back part shall be 1-1/8 inches at the top tapering to 3/8 inch at the bottom. Unless otherwise specified in Tables I and II seams shall be in accordance with these seam allowances.

3.5.1 List of pattern parts.- The component parts of the uniform shall be cut from materials as specified and in accordance with the pattern parts indicated.

Source: https://assist.dla.mil -- Downloaded: 20260-18T10:26Z
Check the source to verify that this is the current version before use.

Materials	Pattern nomenclature	Cut parts
Coat		
Cloth, polyester/cotton, twill (crease-resistant finish)	Front	2
	Side body back	2
	Back	2
	Front facing	2
	Top sleeve	2
	Under sleeve	2
	Collar (outer and inner)	2
	Collar tab	1
	Outside breast pocket	2
	Outside breast pocket flap	4
	Collar interlining	2
	Shoulder loops	No pattern 1/
	Breast pocket template	-
Cloth, sheeting, cotton, or polyester/cotton	Coat front interlining (right side)	1
Trousers		
Cloth, polyester/cotton 2/ twill (crease-resistant finish)	Front	2
	Back	2
	Flies (one right, one left)	2
	Side pocket, wide facing (bearer)	2
	Side pocket, narrow facing	2
	Hip pocket bearer	2
	Hip pocket welt (cord)	2
	Waistband	2
	Waistband lining	2
	Belt loops (strip)	1
	Side pocket	2
	Hip pocket	2
	Left fly, interlining	1
	Right fly, lining	1

1/ Supplier shall make shoulder loops in accordance with procedure outlined in Table I, operation 4.

2/ Side pockets, hip pockets, fly lining (right side) and left fly interlining may be fabricated from twill cloth specified in 3.3.1.1.

Source: https://assist.dla.mil -- Downloaded: 202610-18T10:26Z
Check the source to verify that this is the current version before use.

3.6 Construction.-

3.6.1 Stitches, seams and stitchings.- Stitch, seam, and stitching types as specified in Tables I and II shall conform to FED-STD-751. Wherever two or more methods for seam or stitch types are given for the same part of the operation, any one of them may be used. Where stitch type 101 or 401 is used, the looper (underthread) shall be on the inside of the garment. Unless otherwise specified, topstitching and edgestitching shall be 1/16 inch from the edge.

3.6.2 Thread breaks and ends of seams.- Ends of all seams and stitchings shall be backtacked not less than 3/8 inch. The ends of a continuous line of stitching shall be overlapped not less than 1/2 inch. Thread breaks (all stitch types) shall be secured by stitching back of the break not less than 1/2 inch. Skipped stitches or 401 stitch type thread breaks may be repaired by using 301 stitch type. When stitch type 101 or 401 is permitted, as an option, it shall not be used unless the ends are caught in other seams or stitching.

3.6.3 Stitches per inch.- The minimum and maximum number of stitches per inch shall be as specified in Tables I and II.

3.7 Manufacturing operations requirements.- The coat and trousers shall be manufactured in accordance with the operation requirements specified in Tables I and II. The supplier is not required to follow the exact sequence of operations listed provided that the finished uniform is identical to that produced by following the sequence of operations as listed in Tables I and II, respectively.

3.7.1 Pressing.- All pressing operations referenced in Tables I and II shall be performed by using a heated pressing iron or steam pressing machine.

3.7.2 Shade and size marking.- The component parts of the coat and trousers shall be marked to insure a uniform shade and size throughout the garment. Any method may be used except:

(1) Corrosive metal fastening devices.
(2) Sew-on shade tickets.
(3) Adhesive type tickets which discolor or adhere to the material upon removal of tickets.

NOTE: The use of ink pad numbering machine, rubber stamp, or pencil is acceptable provided the numbers are legible, do not show through on the outside of the garment, and are located on the seam allowance.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T10:26Z
Check the source to verify that this is the current version before use.

Table I - Construction of coat

No.	Description of Operation	Stitch Type	Seam and Stitching Type	Stitches Per Inch	Thread	
					Needle	Bobbin or Looper
1.	Cutting of coat a. Spread the material, face to face, that is, the face of one ply of material shall be over and against the next ply below. b. The coat shall be cut in strict accordance with patterns furnished which show size, shape, placement of component parts, directional lines for cutting, and instructions and notches for the proper assembly of all parts. c. Drill marks for position of pockets are prohibited. d. Cut all parts of the coat out of one piece of material, except inner collar, collar interlining, collar tab, pocket flap lining, and shoulder loops which may be cut from ends and when so cut shall closely match the main assembly. e. The coat and trousers, when purchased as a uniform, shall be cut from the same piece of material, except those parts which may be cut from ends.					
2.	Replacement of defective components During the spreading, cutting and manufacturing process, components having material defects or damages that are classified as defects in MIL-STD-1490 shall be removed from production and replaced with non-defective and properly matched components.					

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T10:26Z
Check the source to verify that this is the current version before use.

Table I - Construction of coat (cont'd)

No.	Description of Operation	Stitch Type	Seam and Stitching Type	Stitches Per Inch	Thread	
					Needle	Bobbin or Looper
3.	Shade and size marking (see 3.7.2) Mark or ticket all parts of the coat, except those parts cut from ends which shall closely match the coat. Sized parts cut from ends should be identified for size.					
4.	Make stripping for shoulder loops					
	a. Fold stripping with the edges abutted at center and double stitch with each row of stitching not less than 1/16 inch from folded edge and the covering stitch on the underside. The finished stripping shall measure 5/16 to 3/8 inch wide.	406	EFh-1	10-14	40/3	40/3
	OR					
	b. Fold stripping with folded edges abutted at center and the covering stitch on the underside.	103 or 105	EFae-1	10-14	40/3	40/3
5.	Make collar tab Collar tab shall be made from one piece of basic cloth.					
	a. Fold collar tab as indicated on pattern and stitch 3/16 inch from raw edge; turn to finished position and work out edges and points.	301	SSa-1	10-14	40/3	40/3
	b. The finished collar tab shall measure 2-5/8 (± 1/8 inches long and 1-5/8 (± 1/8) inches wide at folded edge of free end.					

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T10:26Z
Check the source to verify that this is the current version before use.

Table I - Construction of coat (cont'd)

No.	Description of Operation	Stitch Type	Seam and Stitching Type	Stitches Per Inch	Thread	
					Needle	Bobbin or Looper
6.	Make collar and set collar tab a. The collar shall be made of four plies of basic fabric; one ply for inner collar, two plies for interlining and one ply for outer collar.					
	b. Stitch two plies of basic fabric together to form an interlining with not less than six rows of equally spaced and parallel stitching across length.	301 or 401	SSv-6	10-14	40/3 40/3	40/3 50/3
	c. Set interlining to the underside of inner collar 1/4 to 5/16 inch in from neck edge; stitch 1/16 to 1/8 inch in from all edges and along the length, down the center, from end to end of interlining.	301	LSa-1 and SSv-1	10-14	40/3	40/3
	d. Fold under narrow end of collar tab 1/4 inch and boxstitch, 3/4 by 1 inch, the narrow end of tab to left side of inner collar (selvage edge at narrow end of tab need not be folded under). Tab shall be sewn through inner collar and interlining only. NOTE: Free folded wide end of tab shall extend beyond finished edge of collar as follows: at top - 5/8 (± 1/8) inch at bottom - 3/8 (± 1/8) inch	301 (box-stitch)	LSd-1 or LSbj-1 (selvage)	10-14	40/3	40/3
	e. Turn the neck edge of inner collar over the edge of interlining and stitch across folded edge 1/16 to 1/8 inch from raw edge; lap both superimposed ends of 3/8 inch hanger loop tape at center back of inner collar securely catching ends in seam.	301	SSbc-1	10-14	40/3	40/3

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T10:26Z
Check the source to verify that this is the current version before use.

Table I - Construction of coat (cont'd)

No.	Description of Operation	Stitch Type	Seam and Stitching Type	Stitches Per Inch	Thread	
					Needle	Bobbin or Looper
6.	Make collar and set collar tab (cont'd)					
	f. The finished opening of hanger loop shall measure 1-1/2 (± 1/4) inches long.					
	g. Seam outer collar to inner collar adjacent to edges of interlining along top and side edges; trim joining seam approximately 1/4 inch. Work out corners and edges and edgestitch 1/16 to 1/8 inch from top and side edges catching the interlining.	301	SSe-2	10-14	40/3	40/3
7.	Make patch pocket flaps					
	The pocket flaps shall be made of and lined with the basic cloth.					
	a. Stitch pocket flap pieces together, face to face, 3/16 inch from raw edge. Trim corners, turn the flaps working out edges and points and edgestitch 1/16 to 1/8 inch from folded edge.	301	SSe-2	10-14	40/3	40/3
	b. Stitch a buttonhole in each pocket flap located as outlined in operation 24c of Table I.					
8.	Make patch pockets					
	a. Fold the top of pocket as indicated by notches on pattern, with the raw edge turned under 1/4 inch. Stitch 1/16 to 1/8 inch from folded edge through pocket. Edgestitch top of pocket 1/16 to 1/8 inch from folded edge.	301 or 401	EFt-2 (inverted)	10-14 10-14	40/3 40/3	40/3 50/3
	NOTE: This operation may be performed with a double needle machine.					

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T10:26Z
Check the source to verify that this is the current version before use.

Table I - Construction of coat (cont'd)

No.	Description of Operation	Stitch Type	Seam and Stitching Type	Stitches Per Inch	Thread	
					Needle	Bobbin or Looper
8.	Make patch pockets (cont'd) b. The finished hem for all sizes shall measure 1 (± 1/8) inch. c. Stitch an eyelet in each pocket located as outlined in operation 25b of Table I. d. The edges of the patch pockets shall be pre-creased or turned under and machine basted.					
9.	Make darts The neck darts shall be tapered to a point on the inside without twists or puckers. Thread ends at lower end of darts shall not be trimmed closer than 1/2 inch in length.					
	a. Stitch a dart in each front at neckline as indicated by notches on pattern. The lower end of the darts shall finish below top edges of pocket flaps.	301 or 401	OSf-1	10-14	40/3 40/3	40/3 50/3
	b. Press inside fold of darts toward armholes.					
10.	Join interlining (right front only) a. Seam front edge of interlining to edge of right front, 1/8 to 3/16 inch from raw edge from neckline to bottom of interlining. Bottom edge of interlining shall end 4 (± 1/2) inches from bottom finished edge of coat.	301	SSa-1	10-14	40/3	40/3
	b. Turn under inner edge of interlining 5/16 (± 1/16) inch and stitch 1/16 inch from folded edge to coat front from neckline continuing stitching to bottom edge of coat.	301	LSd-1 and OSf-1	10-14	40/3	40/3

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T10:26Z
Check the source to verify that this is the current version before use.

Table I - Construction of coat (cont'd)

No.	Description of Operation	Stitch Type	Seam and Stitching Type	Stitches Per Inch	Thread	
					Needle	Bobbin or Looper
11.	Attach identification personnel label Stitch label on all four sides, 1/16 to 1/8 inch from edge to underside of right facing. The top of the label shall be positioned 1 (+ 1/4, -0) inch in from the inner edge of right facing and the side 5-1/2 (± 1/2) inches from the finished bottom edge of coat. To prevent label from showing through coat front, the printed area should not extend beyond inner edge of the interlining.	301		10-14	40/3	40/3
12.	Join facings a. Stitch a 3/8 inch wide tape, 1/4 to 5/16 inch from the edge, to the front edge of each front and facing, from notched front step, across front step, down front and across the bottom width of facing. Turn facings, work out corners and edges and edgestitch 1/16 inch from the folded edge.	301	SSab-1 and SSe-2(b)	10-14	40/3	40/3
	b. Fold under 1/4 inch inner edge of left facing and stitch to left front, 1/16 to 1/8 inch from the edge, terminating stitching approximately 3 to 4 inches from the bottom edge. A selvage edge on left facing need not be turned under.	301	LSd-1 or LSbj-1 (selvage)	10-14	40/3	40/3
13.	Set pocket flaps a. Set and stitch flaps to fronts, as indicated by pattern marks, 1/8 inch from raw edges; turn down flap and topstitch 3/16 to 1/4 inch from the folded edge enclosing raw edges in the seaming.	301	LSs-2	10-14	40/3	40/3

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T10:26Z
Check the source to verify that this is the current version before use.

Table I - Construction of coat (cont'd)

No.	Description of Operation	Stitch Type	Seam and Stitching Type	Stitches Per Inch	Thread	
					Needle	Bobbin or Looper
13.	Set pocket flaps (cont'd) b. The finished attached flap shall measure as follows: 34-37 / 38-42 / 43-48 / Tolerance Width at top 4-7/8 / 5-1/8 / 5-1/2 / ± 1/4 Depth at point 2-5/8 / 2-5/8 / 2-5/8 / ± 1/8					
14.	Set patch pockets a. Position patch pocket 3/8 (± 1/8) inch below top-stitching of flap with the front edge parallel to the front edge of coat. Stitch sides and bottom 1/16 to 1/8 inch from folded edge. b. Finished attached pockets shall measure as follows: Sizes / Width at top / Width at bottom / Depth* / Tolerance 34 to 37 / 4-3/4 / 5 / 6 / ± 1/4 38 to 42 / 5 / 5-1/4 / 6 / ± 1/4 43 to 48 / 5-3/8 / 5-5/8 / 6 / ± 1/4 *Depth measurements for shorts 1/4 inch less than above.	301	LSd-1	10-14	40/3	40/3
15.	Make backs a. Each half back shall consist of a center and a side body piece. b. Join center backs face to face 5/8 (± 1/16) inch from the raw edge.	301 or 401	LSq-2(a)	10-14	40/3 40/3	40/3 50/3

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T10:26Z
Check the source to verify that this is the current version before use.

Table I - Construction of coat (cont'd)

No.	Description of Operation	Stitch Type	Seam and Stitching Type	Stitches Per Inch	Thread	
					Needle	Bobbin or Looper
15.	Make backs (cont'd)					
	c. Bind joining seam. If BSb-1 is elected, the raw edge of the binding shall not be exposed on the inside of the finished coat.	301	BSb-1 BSc-1	10-14	40/3	40/3
	d. Turn seam allowance towards left back and top-stitch 1/16 inch from folded edge.	301	LSq-2(b)	10-14	40/3	40/3
	e. Join side body of backs and center back pieces face to face 3/8 inch from the raw edge.	301 or 401	LSq-2(a)	10-14	40/3 40/3	40/3 50/3
	f. Bind joining seam (see operation 15c).	301	BSb-1 BSc-1	10-14	40/3	40/3
	g. Turn seam allowance towards center back and top-stitch 1/16 inch from folded edge.	301	LSq-2(b)	10-14	40/3	40/3
16.	Make sword slit					
	a. Slash seam allowance of left back to the seam line at notches. Hem left back between notches for sword slit opening at side with a double row of stitching.	301	EFb-1	10-14	40/3	40/3
	b. Finished hem on back shall measure 3/8 (± 1/8) inch wide.					
17.	Join side seams					
	a. Join assembled back to fronts at side seams face to face 7/8 (± 1/16) inch from the raw edge.	301 or 401	LSq-2(a)	10-14	40/3 40/3	40/3 50/3
	b. Bind joining seams (see operation 15c).	301	BSb-1 BSc-1	10-14	40/3	40/3

Source: https://assist.dla.mil - Downloaded: 2026-10-18T10:26Z
Check the source to verify that this is the current version before use.

Table I - Construction of coat (cont'd)

No.	Description of Operation	Stitch Type	Seam and Stitching Type	Stitches Per Inch	Thread	
					Needle	Bobbin or Looper
17.	Join side seams (cont'd)					
	c. Turn seam allowance towards back and topstitch 1/16 inch from folded edge.	301	LSq-2(b)	10-14	40/3	40/3
	d. On left side seam leave opening as indicated by notches on pattern.					
	e. Bartack both ends of the sword slit opening the width of hem (see operation 16b).	Bartack		21-28 per bartack	40/3	40/3
18.	Make hem (bottom of coat)					
	a. Bind bottom edge of coat. If BSb-1 is elected, the raw edge of binding shall not be exposed on the inside of finished coat.	301	BSc-1 or BSb-1	10-14	40/3	40/3
	b. Turn up bound edge to inside of coat to form a finished hem of 1-1/8 (± 1/8) inches.					
	c. Close unstitched portion of inner edge of left facing with the end of bottom hem inserted under the inner edge of the facing.	301		10-14	40/3	40/3
	d. Stitch hem with the stitching superimposed on the row of stitching attaching the binding. The stitching shall extend to the vertical row of stitching attaching inner edge of interlining to right front.	301	EFa-1	10-14	40/3	40/3
19.	Join shoulders					
	a. Join shoulders face to face 3/8 (± 1/8) inch from the raw edge inserting two shoulder loops on each shoulder as indicated by marks on patterns.	301 or 401	LSq-2(a)	10-14	40/3 40/3	40/3 50/3
	b. Bind joining seams (see operation 15c).	301	BSb-1 or BSc-1	10-14	40/3	40/3

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T10:26Z
Check the source to verify that this is the current version before use.

Table I - Construction of coat (cont'd)

No.	Description of Operation	Stitch Type	Seam and Stitching Type	Stitches Per Inch	Thread	
					Needle	Bobbin or Looper
19.	Join shoulders (cont'd)					
	c. Turn seam allowance towards back and topstitch 1/16 inch from the folded edge.	301	LSq-2(b)	10-14	40/3	40/3
	NOTE: Shoulder loops may be stitched to front prior to joining shoulder.					
	d. Fold under free end of loops and tack to coat front 1/16 inch from folded end of loops. The tack shall extend the full width of the loop.	301 or	LSd-1	10-14	40/3	40/3
		Bartack or	LSd-1	21-28 per bartack	B	A
		Automatic loop tacker	LSd-1	24-28 per tack	B	A
	e. In the finished coat the length of the shoulder loop opening shall be 1 (± 1/8) inch for the loop next to the neck and 1-3/8 (± 1/8) inches for the loop next to the armhole.					
20.	Set collar					
	a. Join outer collar to neck of coat 1/4 to 5/16 inch from raw edge catching the darts in the stitching with the inside fold of darts turned toward the armholes.	301	LSq-2(a)	10-14	40/3	40/3
	b. Turn seam to the inside of collar and topstitch 1/16 inch from folded edge, through outer collar and inner collar.	301	LScf-2 (inverted)	10-14	40/3	40/3
	c. Step of right front shall extend 1-3/8 (± 1/8) inches beyond collar edge; left front shall extend 5/8 (± 1/8) inch from collar edge.					

NCTR Form 1, 15 Sep 1967

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T10:26Z
Check the source to verify that this is the current version before use.

Table I - Construction of coat (cont'd)

No.	Description of Operation	Stitch Type	Seam and Stitching Type	Stitches Per Inch	Thread	
					Needle	Bobbin or Looper
20.	Set collar (cont'd) d. Finished width of collar shall measure not less than 1-7/8 inches nor more than 2 inches.					
21.	Make sleeves a. Join, face to face, the backarm seam of sleeve, 3/8 inch from raw edge.	301 or 401	LSq-2(a)	10-14	40/3 40/3	40/3 50/3
	b. Bind joining seam, ending 1/4 inch before notch indicating turn up for bottom of sleeve (see operation 15c).	301	BSb-1 or BSc-1	10-14	40/3	40/3
	c. Turn seam allowance towards topsleeve and top-stitch 1/16 inch from the folded edge.	301	LSq-2(b)	10-14	40/3	40/3
	d. Bind bottom edge of sleeve and trim ends even with forearm seam (see operation 15c).	301	BSb-1 or BSc-1	10-14	40/3	40/3
	e. Join, face to face, the forearm seam of sleeve, 3/8 inch from raw edge.	301 or 401	SSa-1	10-14	40/3 40/3	40/3 50/3
	f. Bind joining seam, ending 1/4 inch before notch indicating turn up for bottom of sleeve (see operation 15c).	301	BSb-1 or BSc-1	10-14	40/3	40/3
	g. Turn bound seam towards under sleeve and press.					
	h. Turn up the bound bottom edge of sleeve to the inside, as indicated by notches on pattern, to form a finished hem of 2 (± 1/4) inches. Stitch hem with the stitching superimposed on row of stitching along binding. Stitching shall start and finish at the inseam.	301	EFa-1	10-14	40/3	40/3

Source: https://assist.dla.mil -- Downloaded: 202640-18T10:26Z
Check the source to verify that this is the current version before use.

Table I - Construction of coat (cont'd)

No.	Description of Operation	Stitch Type	Seam and Stitching Type	Stitches Per Inch	Thread	
					Needle	Bobbin or Looper
22.	Set in sleeves a. With backarm seam aligned with seam joining side panel to back, stitch sleeve to armhole 3/8 inch from raw edge as indicated by notches on patterns properly distributing fullness.	301 or 401	LSq-2(a)	10-14	40/3 40/3	40/3 50/3
	b. Bind armhole seam allowance with one end of the binding turned under 3/8 to 1/2 inch and overlapping 1/2 inch near the side seam.	301	BSc-1	10-14	40/3	40/3
	c. Turn sleeves to finished position with the seam against the body on the underside and topstitch all around armhole 1/16 inch from folded edge.	301	LSq-2(b)	10-14	40/3	40/3
23.	Mark and stitch buttonholes a. All buttonholes shall be eyelet end, square bar, cut first type, reinforced with gimp with the stitching securely caught in the fabric and the ends of the gimp pulled through to the underside. Buttonholes shall be clean, correctly positioned and the purling finishing on the outside. The ends of all square bar type buttonholes shall be bartacked in a separate operation, securely catching ends of stitching and gimp.					
	b. Mark and position five 1 (± 1/16) inch long horizontal buttonholes 5/8 (± 1/8) inch in from the finished left front edge. The first buttonhole shall be 3/4 (± 1/8) inch from top (step) edge of the front. The second buttonhole shall be in line with top of pocket flap, and the remaining buttonholes shall be spaced the same distance apart.	Button-hole		60-64 per button-hole not including bartack		

NCTR Form 1, 15 Sep 1967

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T10:26Z
Check the source to verify that this is the current version before use.

Table I - Construction of coat (cont'd)

No.	Description of Operation	Stitch Type	Seam and Stitching Type	Stitches Per Inch	Thread	
					Needle	Bobbin or Looper
23.	Mark and stitch buttonholes (cont'd)					
	c. Mark and position a 5/8 to 3/4 inch vertical buttonhole centered on each pocket flap 5/8 (± 1/8) inch from point on bottom edge.	Button-hole		40-44 per buttonhole not including bartack		
	d. Bartack ends of all buttonholes with a 1/4 inch bartack.	Bartack		21-28 per bartack		
	NOTE: The buttonhole distance shall be measured from the inside purled edge of its eyelet.					
24.	Mark and make eyelets					
	a. Superimpose left front on right front aligning bottom edge. Mark location and sew five 1/8 or 3/16 inch eyelets (inside dimension) in right front and interlining to correspond with eyelet of buttonholes in left front. Inside edge of eyelets shall be 1-1/2 (± 1/8) inches from finished front edge.	Eyelet	1/8 inch	24 per eyelet	B	A
			3/16 inch	34 per eyelet (min.)	B	A
	b. Mark location and sew a 1/8 or 3/16 inch eyelet (inside dimension) centered on each pocket to correspond with buttonhole eyelet in flap.	Eyelet	1/8 inch	24 per eyelet	B	A
			3/16 inch	34 per eyelet (min.)	B	A

NCTR Form 1, 15 Sep 1967

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T10:26Z
Check the source to verify that this is the current version before use.

Table I - Construction of coat (cont'd)

No.	Description of Operation	Stitch Type	Seam and Stitching Type	Stitches Per Inch	Thread	
					Needle	Bobbin or Looper
25.	Mark and attach hooks and eyes to collar					
	a. Position three hooks even with the front edge of the right inside collar and stitch as follows: One 1/2 (± 1/16) inch above base of collar One 3/8 (± 1/16) inch from top of collar One centered (± 1/16) inch between top and bottom hooks.	Hand		3-4 double thread per hole	40/3	
	b. Cover base of hooks with 5/8 inch wide herringbone tape 1-3/4 (± 1/8) inches finished length. Fold under raw ends and neatly hand stitch around all edges.	Hand		8-10	40/3	
	c. Position and stitch three round eyes 1/16 inch back from front edge of the left inside collar to correspond with location of hooks on right inside collar. Ends of collar shall abut each other when hooked.	Hand		3-4 double thread per hole	40/3	
	d. Securely tack top and bottom edge of tab to inner collar approximately 1/8 inch from front edge of collar.	Hand		3-4 double thread per tack	40/3	
26.	Cleaning					
	a. Trim all ends of stitching and remove all loose threads.					
	b. Remove all spots, stains and shade tickets without injury to the material, except one ticket which shall be used to match coat and trouser of uniform.					

NCTR Form 1, 15 Sep 1967

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T10:26Z
Check the source to verify that this is the current version before use.

Table I - Construction of coat (cont'd)

No.	Description of Operation	Stitch Type	Seam and Stitching Type	Stitches Per Inch	Thread	
					Needle	Bobbin or Looper
27.	Pressing Finished appearance - The coat shall be well pressed throughout with heated pressing irons or pressing machines of a type suitable to obtain the desired shape and appearance in accordance with good manufacturing procedures. a. Block the shoulders and armholes to remove fullness and press. b. Press collar smooth and flat. c. Press fronts, sides, and back on a body machine. Care shall be exercised in pressing the fronts so that bottom edges are even. d. Press the sleeves smooth and flat creasing at the backarm and forearm. The backarm crease shall be on the backarm seam. The forearm crease shall extend uniformly to a point 1-1/2 inches above bottom edge of breast pockets.					
28.	Attach size ticket Attach a size ticket (see 3.3.9.3).					

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T10:26Z
Check the source to verify that this is the current version before use.

Table II - Construction of trousers

No.	Description of Operation	Stitch Type	Seam and Stitching Type	Stitches Per Inch	Thread	
					Needle	Bobbin or Looper
1.	Cut trousers a. Spread material face to face, that is, the face of one ply of material shall be over and against the face side of the next ply below. b. Trousers shall be cut in strict accordance with patterns furnished which show size, placement of component parts, directional lines for cutting, and instructions and notches for proper assembly of parts. The directional line may vary from the warp direction by not more than 1-1/2 inches on both fronts and backs. Measurement shall be taken from the top and bottom of the directional line on the pattern to the selvage edge of the fabric and the difference between the two measurements shall not exceed the tolerance specified. c. Drill marks for position of hip pocket are prohibited. d. Cut all parts of the trousers, including wide facings for side pockets and welt facing pieces for hip pockets, out of one piece of material. The waistband lining, narrow facings for side pockets, hip pocket bearers, belt loops, and fly pieces may be cut from ends. The parts cut from ends shall closely match the main assembly. e. The trousers and coat, when purchased as a uniform, shall be cut from the same piece of material except those parts which may be cut from ends.					

NCTR Form 1, 15 Sep 1967

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T10:26Z
Check the source to verify that this is the current version before use.

Table II - Construction of trousers (cont'd)

No.	Description of Operation	Stitch Type	Seam and Stitching Type	Stitches Per Inch	Thread	
					Needle	Bobbin or Looper
1.	Cut trousers (cont'd) f. Cut the right fly lining, waistband lining and waistband interlining parts on the bias. The left fly interlining may be cut in either the warp or filling direction. g. The waistband lining and waistband interlining shall be cut sufficiently wide to finish as specified in operation 18. OR The waistband lining may be the preassembled commercial type using the silesia or twill and buckram materials specified. h. Cut as many pockets as possible in the warp direction.					
2.	Replacement of defective components During the spreading, cutting and manufacturing process, components having material defects or damages that are classified as defects in MIL-STD-1488 shall be removed from production and replaced with non-defective and properly matched components.					
3.	Shade and size marking (see 3.7.2) Mark or ticket all parts of the trousers, except those parts cut from ends which shall closely match the trouser.					

NCTR Form 1, 15 Sep 1967

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T10:26Z
Check the source to verify that this is the current version before use.

Table II - Construction of trousers (cont'd)

No.	Description of Operation	Stitch Type	Seam and Stitching Type	Stitches Per Inch	Thread	
					Needle	Bobbin or Looper
4.	Overedge stitching Finished appearance - When a knife is used on overedging machine, set guide so that the edge of the fabric is not cut off but only the raw edge is trimmed when overedged.					
	a. Overedge the seam allowance of inseams and outseams of the back parts and fore parts of trousers, also fly edge of right fore part. The overedge stitching on the inseam of left fore part shall extend to fly notch. The overedge stitching on outseams of fore parts shall extend from bottom notch of side pocket to bottom of trouser leg.	502 or 503 or 504	EFd-1	6-10	70/2	70/2
	b. Overedge stitch crotch seam, seat seam, and the raw edge at left end of waistband.	502 or 503 or 504	EFd-1	6-10	70/2	70/2
5.	Make stripping for belt loops					
	a. Fold stripping with the edges abutted at center and double stitch with each row of stitching not less than 1/16 inch from edge and the covering stitch on the underside. The finished stripping shall measure 5/16 to 3/8 inch wide.	406	EFh-1	10-14	40/3	40/3
	OR					
	b. Fold stripping with the edges abutted at center and the covering stitching on the underside.	103 or 105	EFae-1	10-14	40/3	40/3
	OR					

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T10:26Z
Check the source to verify that this is the current version before use.

Table II - Construction of trousers (cont'd)

No.	Description of Operation	Stitch Type	Seam and Stitching Type	Stitches Per Inch	Thread	
					Needle	Bobbin or Looper
5.	Make stripping for belt loops (cont'd) c. Seam stripping pieces, turn, smooth out and flatten. The seam shall not be exposed on the side edge of the formed loops.	301	EFu-1	10-14	40/3	40/3
6.	Set side pocket bearers and facings Position facing and bearer on pocketing and stitch along the inner side, with the raw edge turned in, and across the lower end. A selvage edge need not be turned in (Ill. A, Fig. 3).	301	LSd-1 and LSbj-1	10-14	40/3	40/3
7.	Attach identification label Center the combination identification, personnel and size label on the right hip pocket below the bearer so that on the finished trouser the label will be on the upper pocket ply facing the wearer. The label shall be stitched on all four sides.	301		10-14	40/3	40/3
8.	Set hip pocket bearer Turn in lower raw edge of pocket bearer piece and seam to pocket at notches as indicated on patterns. When bearer piece is cut on selvage, the edge need not be turned in (Ill. A, Fig. 6).	301	LSd-1 or LSbj-1 (selvage)	10-14	40/3	40/3
9.	Make flies The left fly shall be interlined with sheeting and the right fly shall be one thickness of the trouser material lined with sheeting.					

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T10:26Z
Check the source to verify that this is the current version before use.

Table II - Construction of trousers (cont'd)

No.	Description of Operation	Stitch Type	Seam and Stitching Type	Stitches Per Inch	Thread	
					Needle	Bobbin or Looper
9.	Make flies (cont'd)					
	a. Double stitch 3/16 to 1/4 inch gauge the back edge of fastener tape to left fly through the interlining with the outer row of double stitching 1/16 to 1/8 inch from edge of tape and ends of stitching securely tacked. When trousers are finished the edge of the chain shall be 1/2 to 3/4 inch from front edge of fly at the top, tapering to 1/4 to 3/8 inch at bottom. When fasteners are cut and scoops removed, the bottom end of the scoops shall be 1/4 to 1/2 inch above the fly notch (Ill. A, Fig. 4).	301	LSbj-2	10-14	40/3	40/3
	b. After fasteners are cut and scoops removed, stitch 1/4 inch from back edge or overedge fastener tape to back edge of right fly, with bottom end of scoops 1/4 to 1/2 inch above the fly notch (Ill. B, Fig. 4).	301 or 503 or 504	SSa-1 SSa-1 SSa-1	10-14 6-10 6-10	40/3 70/2 70/2	40/3 70/2 70/2
	c. The right fly shall be one thickness of the basic cloth and lined with basic cloth, cotton silesia or twill cloth.					
	d. Seam lining to the front edge of the right fly to within 1 (+ 1/4) inch from top of fly; turn and stitch 1/16 to 1/8 inch from edge (Ill. C & D, Fig. 4).	301 or 401 and 301	SSe-2(a) SSe-2(a) SSe-2(b)	10-14 10-14 10-14	40/3 40/3 40/3	40/3 50/3 40/3
	e. Overedge the back edge of the left fly and fly interlining together (Ill. E, Fig. 4).	502 or 503 or 504	SSa-1	6-10	70/2	70/2

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T10:26Z
Check the source to verify that this is the current version before use.

Table II - Construction of trousers (cont'd)

No.	Description of Operation	Stitch Type	Seam and Stitching Type	Stitches Per Inch	Thread	
					Needle	Bobbin or Looper
10.	Make darts The darts shall be carefully tapered and properly pressed to avoid unsightly bulging. The lower end of the dart shall be securely backtacked and shall finish in hip pocket opening.					
	a. Seam cut darts at back.	301	SSa-1	10-14	40/3	40/3
	b. Press darts open and flat.					
11.	Sew on right and left flies Finished appearance - The flies shall be of even length where they join the crotch seam. The fastener parts shall be so set that there is no twisting or puckering when fly is closed. The end of the right fly lining shall extend 1/2 inch or more beyond inseam.					
	a. Sew on right fly (slide fastener attached) with notches matching, catching fastener tape in the seam (Ill. F, Fig. 4).	301	SSa-1	10-14	40/3	40/3
	b. Press right fly seam open and flat with the fastener tape facing towards the side seam. The slide fastener shall not be damaged in the pressing.					
	NOTE: When stitch type 503 or 504 is used in operation 9e, the joining seams of the right fly and fastener tape shall be turned towards the side seam and pressing may be omitted.					
	c. Sew on left fly (slide fastener attached) with notches matching (Ill. G, Fig. 4).					

Source: https://assist.dla.mil -- Downloaded: 202610-18T10:26Z
Check the source to verify that this is the currentversion before use.

Table II - Construction of trousers (cont'd)

No.	Description of Operation	Stitch Type	Seam and Stitching Type	Stitches Per Inch	Thread	
					Needle	Bobbin or Looper
11.	Sew on right and left flies (cont'd)					
	d. Turn left fly to the inside with seam 1/16 to 1/8 inch back of folded edge and press front edge without damage to slide fastener chain (Ill. H, Fig. 4).					
12.	Make and attach hip pockets Finished appearance - The pocket opening shall measure not less than 5 or more than 5-1/2 inches and the depth from top of bottom welt shall measure not less than 5-1/2 or more than 6-1/2 inches.					
	a. Position welt facing piece on outside as indicated by patterns and seam to trouser through pocket on underside with two rows of stitching, 5/16 to 3/8 inch gauge (Ill. B, Fig. 6).	301	SSv-2	10-14	40/3	40/3
	b. Cut opening midway between the two rows of stitching and diagonally notch the ends, through facing, trousers, and pocket simultaneously; turn lower part of facing through cut opening and top stitch forming a 1/8 to 3/16 inch welt edge (Ill. C, D, and E, Fig. 6).	301	SSbe-2(b)	10-14	40/3	40/3
	c. Turn in raw edge of welt facing piece and seam to pocket. When welt facing piece is cut with selvage the edge need not be turned in (Ill. E, Fig. 6).	301	LSd-1 or LSbj-1 (selvage)	10-14	40/3	40/3
	d. Fold pocket, right side out, seam side raw edges 1/4 to 3/8 inch from edge and turn to finished position (Ill. F, Fig. 6).	301 or 401	SSae-2(a) SSae-2(a)	10-14 10-14	40/3 40/3	40/3 50/3

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T10:26Z
Check the source to verify that this is the current version before use.

Table II - Construction of trousers (cont'd)

No.	Description of Operation	Stitch Type	Seam and Stitching Type	Stitches Per Inch	Thread	
					Needle	Bobbin or Looper
12.	Make and attach hip pockets (cont'd)					
	e. Smooth out pocket and single stitch sides 3/16 to 1/4 inch from edge enclosing raw edges. Stitching may extend across bottom folded edge of pocket. The ends of the bearer and welt facing piece shall be caught in the edge stitching only (Ill. G, Fig. 6).	301	SSae-2(b)	10-14	40/3	40/3
	f. Form a 1/8 to 3/16 inch welt of the facing on upper edge of pocket opening and topstitch the seam through trouser, welt facing piece, pocket bearer and pocket, closing top of pocket (Ill. H, Fig. 6).	301	LScc-2(b)	10-14	40/3	40/3
	g. Tack ends of pocket opening through welt, bearer, and pocket.	301		10-14	40/3	40/3
	OR					
	h. Operations b and c above may be accomplished with a double welt pocket machine which stitches, cuts and turns welt edges in one operation. When this machine is used, the welt piece may be trimmed to permit insertion into the machine. The joining seam of the bottom welting piece shall be topstitched through back of trousers and welting piece and the joining seam of the top welting piece shall be topstitched through all plies in the closing of the top pocket. Ends of pocket opening shall be securely tacked.	101 and 301		10-14 10-14	40/3 40/3	40/3

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T10:26Z
Check the source to verify that this is the current version before use.

Table II - Construction of trousers (cont'd)

No.	Description of Operation	Stitch Type	Seam and Stitching Type	Stitches Per Inch	Thread	
					Needle	Bobbin or Looper
13.	Stitch on side pocket Finished appearance - The edges of pocket openings shall finish smooth and flat without distortion. Pocket openings shall be aligned and of uniform length and shall finish not less than 5-3/4 nor more than 6-1/2 inches between tacks. Care shall be taken to avoid notching the pocket on underside beyond the width of the side seam outlet.					
	a. Seam side pockets to fronts as indicated by marks on pattern and notch for pocket opening. Turn pocket with the seam to the back of front edge on underside and stitch 3/16 to 1/4 inch from edge of pocket opening (Ill. B & C, Fig. 3).	301	SSe-2	10-14	40/3	40/3
	b. Fold pocket right side out, seam raw edges from step and continue along the bottom of pocket. Notch pocket and facing at top of step and turn (Ill. D & E, Fig. 3).	301 or 401	SSae-2(a) SSae-2(a)	10-14 10-14	40/3 40/3	40/3 50/3
	c. Tack the ends of opening through bearer with a 1/4 to 3/8 inch tack. The right and left pocket opening shall not be out of alignment by more than 1/2 inch (Ill. F, Fig. 3).	301		10-14	40/3	40/3
14.	Join outseams a. Join outseams with notches matching.	301 or 401	SSa-1	10-14	40/3 40/3	40/3 50/3
	b. Press outseams open and flat from bottom to top of trousers with the back edge of side pocket over the open seam.					
	OR					

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T10:26Z
Check the source to verify that this is the current version before use.

Table II - Construction of trousers (cont'd)

No.	Description of Operation	Stitch Type	Seam and Stitching Type	Stitches Per Inch	Thread	
					Needle	Bobbin or Looper
14.	Join outseams (cont'd) c. The outseams may be joined by turning back the edge of one part and single stitching to the other part 1/16 to 1/8 inch from edge.	301 or 401	SSr-1	10-14	40/3 40/3	40/3 50/3
15.	Finish side pockets Turn in back edge of side pocket even with the serged edge of back outseam. Stitch 3/16 to 1/4 inch from folded edge through seam allowance with the stitching continued to folded edge at bottom with end of stitching securely backtacked (Ill. G, Fig. 3).	301	SSb-1 and SSae-2(b)	10-14	40/3	40/3
16.	Seam waistband and set belt loops Finished appearance - The waistband shall finish smooth and flat without fullness, gathers or pleats. The belt loops shall be correctly positioned with their ends (except the back center loop) inserted not less than 1/2 inch at bottom of waistband and caught in the waistband joining seam. The waistband shall finish 1-3/4 (± 1/8) inches wide. a. The waistband shall be made of one ply of basic material. b. There shall be seven loops for sizes up to and including size 37 and eight loops for size 38 and above. The loops shall be positioned as follows: (1) One on each front positioned in accordance with notches on pattern. (2) One adjacent to each side seam on backs of trousers. (3) One centered between side seam and seat seam.					

NCTR Form 1, 15 Sep 1967

MIL-C-1050(SA)

Source: https://assist.dla.mil -- Downloaded: 202610-18T10:26Z
Check the source to verify that this is the currentversion before use.

Table II - Construction of trousers (cont'd)

No.	Description of Operation	Stitch Type	Seam and Stitching Type	Stitches Per Inch	Thread	
					Needle	Bobbin or Looper
16.	Seam waistband and set belt loops (cont'd) (4) One on seat seam. (5) The extra loop for larger sizes on right front 1-3/8 to 1-5/8 inches from right fly joining seam.					
	c. Seam on waistband, catching ends of belt loops in their proper position, except center back loop.	301	SSa-1	10-14	40/3	40/3
	d. Drop loops and securely stitch or bartack the loops 1/4 (± 1/8) inch below waistband seam. The stitching or bartacking shall not be wider than the width of loops and shall be hidden by loops when trousers are finished.	301 or Bartack or Automatic loop tacker		10-14 21-28 per bartack 24-28 per tack	40/3 B B	40/3 A A
17.	Attach hook and eye a. Position the hook on the center (1/4 inch off tolerance) of the left waistband with the rolled edge of the hook aligned with the slide fastener scoops. Attach through a suitable reinforcement. b. Position eye on the center of the right waistband, aligned with the slide fastener scoops, to correspond with the hook on the left waistband. Attach through a suitable reinforcement. NOTE: A machine that automatically attaches the hooks and eyes, and feeds reinforcement pieces may be used.					

NCTR Form 1, 15 Sep 1967

Source: https://assist.dla.mil - Downloaded: 2026-10-18T10:26Z
Check the source to verify that this is the current version before use.

Table II - Construction of trousers (cont'd)

No.	Description of Operation	Stitch Type	Seam and Stitching Type	Stitches Per Inch	Thread	
					Needle	Bobbin or Looper
18.	Make and join waistband lining Finished appearance - The waistband lining shall be made of a single ply of basic cloth, cotton silesia interlined with buckram, or twill cloth interlined with buckram. The waistband lining shall measure 1-7/8 to 2 inches wide in the finished trousers.					
	a. Make cotton silesia or twill cloth waistband lining: Overlap silesia or twill lining on the buckram interlining 3/4 inch and stitch 1/8 to 3/16 inch from raw edge of lining. Fold lining over edge of interlining and press.	101 or 301 or 401	LSa-1 LSa-1 LSa-1	6-10 6-10 6-10	40/3 40/3 40/3	 40/3 50/3
	OR					
	As an alternate, a commercial buckram interlined waistband lining conforming to the specified requirements may be used (see operation 1g).					
	b. Join basic cloth, cotton silesia or twill cloth waistband lining to top edge of waistband.	301 or 401	LSq-2(a) LSq-2(a)	10-14 10-14	40/3 40/3	40/3 50/3
	c. Turn lining over waistband and stitch through lining, interlining and seam allowance, 1/16 inch from folded edge.	301	LSq-2(b)	10-14	40/3	40/3
	OR					

Source: https://assist.dla.mil -- Downloaded: 202640-18T10:26Z
Check the source to verify that this is the currentversion before use.

Table II - Construction of trousers (cont'd)

No.	Description of Operation	Stitch Type	Seam and Stitching Type	Stitches Per Inch	Thread	
					Needle	Bobbin or Looper
18.	Make and join waistband lining (cont'd) d. Join waistband lining to waistband by inserting the top edge of waistband between the waistband lining and the buckram with the top edge of the lining turned in and seam with a row of imitation hand felled stitching.	404	LSb-1 except buckram shall be on the underside	10-14	40/3	40/3
	OR					
	e. Join basic cloth, cotton silesia or twill cloth waistband lining to top edge of waistband. The waistband lining shall finish 1/8 inch below finished top edge of waistband.	301	SSa-1	10-14	40/3	40/3
19.	Finish right and left flies Finished appearance - The top corner of the right fly shall be neatly and completely forced out to present a smooth appearance. The right fly lining shall lie smooth and flat without pleats. Care shall be taken in finishing the top of the left fly to avoid bulkiness. The finished seaming of the left fly shall be uniform in width with the fly smooth and flat, without gathers or pleats. The joining seam of left fly to forepart shall not be exposed on outside of trousers. The base of the fly shall be so finished as to avoid twisting, pleating or puckering. The crotch and seat seam shall be spread open and flat when the right fly lining is stitched to the seam allowances.					

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T10:26Z
Check the source to verify that this is the current version before use.

Table II - Construction of trousers (cont'd)

No.	Description of Operation	Stitch Type	Seam and Stitching Type	Stitches Per Inch	Thread	
					Needle	Bobbin or Looper
19.	Finish right and left flies (cont'd) a. With the right fly lining turned to the outside, fold back uppermost inner edge of right fly lining approximately 3/4 inch. Continue seaming the front edge of the right fly and fly lining to top edge of waistband across to back edge of fly lining. Trim, turn and work out corner and stitch 1/16 to 1/8 inch from front edge. The edge stitching shall conform to stitching on edge of fly (Ill. J, Fig. 5).	301	SSa-1 and SSe-2(b)	10-14	40/3	40/3
	b. Turn back end of left waistband in line with the vertical fly joining seam and stitch across top edge of waistband the width of the fly. Trim, turn and work out point (Ill. K, Fig. 5).	301	SSa-1	10-14	40/3	40/3
	c. Insert free ends of waistband lining under left and right flies.					
	d. Turn in back edge of right fly lining and top stitch seam of fly through front, fastener tape and fly lining, and continue stitching to top of waistband (Ill. J, Fig. 5).	301	LSq-2(b) shows similar seam	10-14	40/3	40/3
	e. Smooth out left fly with front joining seam 1/16 to 1/8 inch back of the folded edge of forepart and seam back edge of left fly through front, interlining and fly from notch at base of fly to top of waistband 1-7/8 (± 1/8) inches, except at base of fly where the stitching curves to the front edge at the fly notch. The overedge stitching of back edge of the left fly shall extend to top of waistband (Ill. K, Fig. 5).	301	LSbj-1	10-14	40/3	40/3

Source: https://assist.dla.mil -- Downloaded: 202640-18T10:26Z
Check the source to verify that this is the current version before use.

Table II - Construction of trousers (cont'd)

No.	Description of Operation	Stitch Type	Seam and Stitching Type	Stitches Per Inch	Thread	
					Needle	Bobbin or Looper
20.	Join inseams Finished appearance - The inseams shall be carefully joined with notches matching to avoid twisting and puckering. The seams shall start and finish evenly.					
	a. Join inseams with notches matching forming outlet on the back inseams as indicated on pattern.	301 or 401	SSbd-1 SSbd-1	10-14 10-14	40/3 40/3	40/3 50/3
	b. Press inseams open and flat.					
	OR					
	c. The inseams may be joined by turning back the edge of one part and single stitching to the other part 1/16 to 1/8 inch from turned edge.	301 or 401	SSr-1	10-14	40/3 40/3	40/3 50/3
21.	Join crotch and seat seam Finished appearance - The crotch and seat seam shall be joined with proper tension resulting in sufficient elasticity of seam to meet strain encountered in sitting or stooping. The waist shall be measured before the seat seam is joined to assure correct waist size. In the joining of the seat seam the inseams shall meet. The base of the left fly shall cover the right fly on outside of the finished trouser. NOTE: Measure waist to verify size before joining seat seam.					
	a. Join the crotch and seat seam from base of fly to free edge of waistband lining with a double needle seat seamer. The two rows of stitching shall be 1/64 to 1/32 inch apart.	401	SSa-2	8-10 each needle	40/3	40/3

Source: https://assist.dla.mil -- Downloaded: 202640-18T10:26Z
Check the source to verify that this is the current version before use.

Table II - Construction of trousers (cont'd)

No.	Description of Operation	Stitch Type	Seam and Stitching Type	Stitches Per Inch	Thread	
					Needle	Bobbin or Looper
21.	Join crotch and seat seam (cont'd) b. Press crotch, seat seam, and waistband outlets open and flat.					
22.	Finish waistband a. Fold down waistband lining, turn under lower edge of waistband lining (basic cloth) (with ends at center back folded in) and top stitch the waistband joining seam, 1/16 to 1/8 inch from folded edge, through the waistband (not through trouser side) catching the waistband joining seam allowance, the waistband lining, and the top of the pockets in the stitching. b. Pockets may be stitched or basted to the waistband joining seam allowance and the bottom edge of the waistband lining may be pre-hemmed prior to the top stitching. The top stitching shall extend to, but not beyond, the stitching on the right fly joining seam and the stitching on the back edge of the left fly.	301	LScf-2(b) shows similar seam	10-14	40/3	40/3
	OR					
	c. Raisestitch the twill cloth or cotton silesia, waistband lining 1/16 to 1/8 inch from waistband joining seam, through waistband (not trouser side), waistband lining, inserting ends of belt loops and tops of pockets. The top stitching shall extend to, but not beyond, the back edge of right and left flies. Pockets may be stitched or basted to waistband seam allowance prior to raisestitching.	301	LSq-2 shows finished seam	10-14	40/3	40/3

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T10:26Z
Check the source to verify that this is the current version before use.

Table II - Construction of trousers (cont'd)

No.	Description of Operation	Stitch Type	Seam and Stitching Type	Stitches Per Inch	Thread	
					Needle	Bobbin or Looper
23.	Size label Stitch the top edge of the size label on the lower edge of the waistband lining above the right hip pocket.	301		10-14	40/3	40/3
24.	Assemble fasteners Attach slider and staple bottom of fastener together with the ends of chain even.					
25.	Stitch right fly extension piece Finished appearance - The crotch and seat seam shall be properly spread when the right fly extension piece is stitched.					
	a. Turn in raw edges of right fly lining extension piece and hand fell or seam by machine to each side of crotch seam (Ill. L, Fig. 5).	301 or 401	SSac-3 (b,c,d)	10-14 6-8	40/3 40/3	40/3 50/3
26.	Attach belt loops Finished appearance - All belt loops shall measure 1-7/8 (± 1/8) inches from tacking at top to folded edge of loop at bottom. The tacking shall extend the width of the loops but not beyond.					
	a. Fold top of loop under (except center back loop) with the folded edge positioned 1/8 (± 1/16) inch from the top edge of waistband and bartack through the waistband.	Bartack or Automatic loop tacker		21-28 per bartack 24-28 per tack	B B	A A

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T10:26Z
Check the source to verify that this is the current version before use.

Table II - Construction of trousers (cont'd)

No.	Description of Operation	Stitch Type	Seam and Stitching Type	Stitches Per Inch	Thread	
					Needle	Bobbin or Looper
26.	Attach belt loops (cont'd)					
	b. Bartack the lower end of center back loop over the seat seam with the under side up and the bottom raw edge adjacent to the waistband seam. Bartack shall be positioned 1/4 (± 1/8) inch from raw edge of loop.	Bartack or Automatic loop tacker		21-28 per bartack 24-28 per tack	B B	A A
	c. Turn up the center back loop, fold top of loop under so the folded edge is positioned 1/8 (± 1/16) inch from the top edge of the waistband and bartack through the waistband.	Bartack or Automatic loop tacker		21-28 per bartack 24-28 per tack	B B	A A
27.	Make buttonhole Buttonhole shall be of the eyelet end, taper bar, cut after type, worked over gimp with the ends of the buttonhole stitching and gimp securely tacked.					
	a. Make a vertical buttonhole in the center of the left hip pocket with the inside edge of eyelet 3/16 to 5/16 inch below the joining seam of cord edge.	Button-hole		52-54 per buttonhole including tack	B	A
28.	Sew on buttons Hand or machine sewn buttons shall have the thread tightly wrapped not less than four times around to form a 1/8 (± 1/16) inch shank. The thread ends shall be hidden and securely tacked off with not less than two stitches.					

Source: https://assist.dla.mil -- Downloaded: 202610-18T10:26Z
Check the source to verify that this is the current version before use.

Table II - Construction of trousers (cont'd)

No.	Description of Operation	Stitch Type	Seam and Stitching Type	Stitches Per Inch	Thread	
					Needle	Bobbin or Looper
28.	Sew on buttons (cont'd) a. Sew a 22-line button on the bearer of the left hip pocket through all plies to correspond with buttonhole in pocket.	Hand or 101 or 301 or 801		4 double per button not including shank 14-16 per button 14-16 per button 7 (min.) 1 deep set per button	16/4 20/4 20/4 5 nylon	 20/4
29.	Bartacking Finished appearance - The bartacks shall be well made and correctly placed to reinforce points of strain as specified. The bartacks at side pocket openings shall extend across the outseams not more than 1/8 inch.					
	a. Bartack all pockets at ends of pocket openings. The bartacks shall be perpendicular to the opening.	Bartack		21-28 per bartack	B	A
	b. Bartack the base of fly at the junction of the crotch seam and left flystitching. The bartack may be diagonal in line with the left flystitching, or may be horizontal and shall extend 1/16 to 1/8 inch across the crotch seam (Ill. M, Fig. 5).	Bartack		21-28 per bartack	B	A
	c. All bartacks on pockets and at base of fly shall be made by machine and shall be 3/8 to 1/2 inch long.					

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T10:26Z
Check the source to verify that this is the current version before use.

Table II - Construction of trousers (cont'd)

No.	Description of Operation	Stitch Type	Seam and Stitching Type	Stitches Per Inch	Thread	
					Needle	Bobbin or Looper
30.	Finish bottoms Overedge stitch or pink bottom of trousers.	502 or 503 or 504	EFd-1	6-10	70/2	70/2
31.	Cleaning a. Trim all ends of stitching and remove all loose threads. b. Remove all spots, stains, and shade tickets without injury to the material, except one ticket which shall be used to match coat and trouser of uniform.					
32.	Pressing a. Press smooth the tops, including fly and pockets. b. Press smooth and crease the legs in the center with the seams matching at the bottom and in the crotch; or the inseam in the crotch may be slightly back of the outseam. c. Close slide fastener on fly and engage hook and eye on waistband. d. Attach size ticket (see 3.3.9.3).					

NCTR Form 1, 15 Sep 1967

Source: https://assist.dla.mil -- Downloaded: 202640-18T10:26Z
Check the source to verify that this is the current version before use.

3.8 Sizes and measurements.- Sizes and measurements of finished coats and trousers shall be as shown in Tables III and IV (see Figures 1 and 2). All measurements are expressed in inches.

Table III - Sizes and measurements of coats

Sizes	(A) Chest	Sleeve Length (B) Short	Regular	Long	X-Long	Coat Length (C) Short	Regular	Long	X-Long	(D) Waist	(*) Collar Length
34	36	16-3/4	17-3/4	18-3/4	20	27-1/2	29	30-1/2	32-1/2	32	15-1/2
35	37	16-3/4	17-3/4	18-3/4	20	27-5/8	29-1/8	30-5/8	32-5/8	33	15-3/4
36	38	16-3/4	17-3/4	18-3/4	20	27-3/4	29-1/4	30-3/4	32-3/4	34	16
37	39	16-3/4	17-3/4	18-3/4	20	27-7/8	29-3/8	30-7/8	32-7/8	35	16-1/4
38	40	16-3/4	17-3/4	18-3/4	20	28	29-1/2	31	33	36	16-1/2
39	41	16-3/4	17-3/4	18-3/4	20	28-1/8	29-5/8	31-1/8	33-1/8	37	16-3/4
40	42	16-3/4	17-3/4	18-3/4	20	28-1/4	29-3/4	31-1/4	33-1/4	38	17
41	43	16-3/4	17-3/4	18-3/4	20	28-3/8	29-7/8	31-3/8	33-3/8	39	17-1/4
42	44	16-3/4	17-3/4	18-3/4	20	28-1/2	30	31-1/2	33-1/2	40	17-1/2
43	45	16-3/4	17-3/4	18-3/4	20	28-5/8	30-1/8	31-5/8	33-5/8	41	17-3/4
44	46	16-3/4	17-3/4	18-3/4	20	28-3/4	30-1/4	31-3/4	33-3/4	42	18
45	47	16-3/4	17-3/4	18-3/4	20	28-3/4	30-1/4	31-3/4	33-3/4	43	18-1/4
46	48	16-3/4	17-3/4	18-3/4	20	28-7/8	30-3/8	31-7/8	33-7/8	44	18-1/2
47	49	16-3/4	17-3/4	18-3/4	20	28-7/8	30-3/8	31-7/8	33-7/8	45	18-3/4
48	50	16-3/4	17-3/4	18-3/4	20	29	30-1/2	32	34	46	19
Tolerance	+ 3/4 - 1/2	+ 1/2 - 3/8	+ 1/2 - 3/8	+ 1/2 - 3/8	+ 1/2 - 3/8	+ 1/2 - 1/2	+ 1/2 - 1/2	+ 1/2 - 1/2	+ 1/2 - 1/2	+ 1 - 1/2	+ 1/4 - 1/8

NOTE: Refer to Figure 1 for measurement points A, B, C, and D.

(A) Chest - Twice the measurement taken across front at base of armhole from folded edge to folded edge with corresponding buttonhole/button eyelets superimposed.
(B) Sleeve Length - Measurement taken along inseam from base of armhole to bottom edges of sleeve.
(C) Coat Length - Measurement taken along center back seam from neck seam to bottom edge of coat.
(D) Waist - Twice the measurement taken across front at fourth buttonhole from top from folded edge to folded edge with corresponding buttonhole/button eyelets superimposed.
(*) Collar Length - Measurement taken with collar open and spread out flat, along base of collar from end to end.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T10:26Z
Check the source to verify that this is the current version before use.

Table IV - Sizes and measurements of trousers

Coat Size	(A) Trouser Waist Size	(B) Seat	(C) Inseam (unhemmed) Short	Reg.	Long	X-Long	(D) Knee Short	Reg.	Long	X-Long	(E) Bottom Short	Reg.	Long	X-Long
34	28	38-3/4	32	34	36	38	9-1/2	9-3/4	10	10	8-5/8	8-7/8	9-1/8	9-1/8
35	29	39-3/4	32	34	36	38	9-5/8	9-7/8	10-1/8	10-1/8	8-3/4	9	9-1/4	9-1/4
36	30	40-3/4	32	34	36	38	9-3/4	10	10-1/4	10-1/4	8-3/4	9	9-1/4	9-1/4
37	31	41-3/4	32	34	36	38	9-7/8	10-1/8	10-3/8	10-3/8	8-7/8	9-1/8	9-3/8	9-3/8
38	32	42-3/4	32	34	36	38	10	10-1/4	10-1/2	10-1/2	8-7/8	9-1/8	9-3/8	9-3/8
39	33	43-3/4	32	34	36	38	10-1/8	10-3/8	10-5/8	10-5/8	9	9-1/4	9-1/2	9-1/2
40	34	44-3/4	32	34	36	38	10-1/4	10-1/2	10-3/4	10-3/4	9	9-1/4	9-1/2	9-1/2
41	35	45-3/4	32	34	36	38	10-3/8	10-5/8	10-7/8	10-7/8	9-1/8	9-3/8	9-5/8	9-5/8
42	36	46-3/4	32	34	36	38	10-1/2	10-3/4	11	11	9-1/8	9-3/8	9-5/8	9-5/8
43	37	47-3/4	32	34	36	38	10-5/8	10-7/8	11-1/8	11-1/8	9-1/4	9-1/2	9-3/4	9-3/4
44	38	48-3/4	32	34	36	38	10-3/4	11	11-1/4	11-1/4	9-1/4	9-1/2	9-3/4	9-3/4
45	39	49-3/4	32	34	36	38	10-7/8	11-1/8	11-3/8	11-3/8	9-3/8	9-5/8	9-7/8	9-7/8
46	40	50-3/4	32	34	36	38	11	11-1/4	11-1/2	11-1/2	9-3/8	9-5/8	9-7/8	9-7/8
47	41	51-3/4	32	34	36	38	11-1/8	11-3/8	11-5/8	11-5/8	9-1/2	9-3/4	10	10
48	42	52-3/4	32	34	36	38	11-1/4	11-1/2	11-3/4	11-3/4	9-1/2	9-3/4	10	10
Tolerance	± 1/2	+ 1-1/2 - 1	+ 1 - 1/2	+ 1 - 1/2	+ 1 - 1/2	+ 1 - 1/2	± 1/4	± 1/4	± 1/4	± 1/4	± 1/4	± 1/4	± 1/4	± 1/4

NOTE: Measurements for waist and seat shall be taken with slide fastener and waistband fully closed. Refer to Figure 2 for measurement points A, B, C, D, and E. All measurements shall be taken with trousers laid out smooth and flat.

(A) Waist - Twice the measurement taken across top edge of waistband from folded edge to folded edge.
(B) Seat - Twice the measurement taken 1 inch above fly bartack from folded edge to folded edge.
(C) Inseam - Measurement shall be taken from junction of seams (crotch) along inseam to bottom of unhemmed trousers leg.
(D) Knee - Measure from folded edge to folded edge across the width of trouser leg. Location of knee measurements shall be taken from unfinished bottom of leg as follows: Shorts - 18-7/8 to 19-3/8 inches, Regulars - 19-7/8 to 20-3/8 inches, Longs - 20-7/8 to 21-3/8 inches, X-Longs - 21-7/8 to 22-3/8 inches.
(E) Bottom - Measure along unhemmed bottom edge of leg from folded edge to folded edge.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T10:26Z
Check the source to verify that this is the current version before use.

3.9 Workmanship.- The finished coats and trousers shall conform to the quality and grade of product established by this specification. As a final step in the supplier's production control plan before formation of a lot, each dress coat and trouser shall be examined after pressing and prior to folding for packaging, and a coat or trouser containing a selected defect shall not be included in the end item lot. Selected defects are those defects listed in MIL-STD-1490 and MIL-STD-1488 indicated by an asterisk (*). The occurrence of defects shall not exceed the applicable accepted point value or defect limit.

4. QUALITY ASSURANCE PROVISIONS

4.1 Responsibility for inspection.- Unless otherwise specified in the contract or purchase order, the supplier is responsible for the performance of all inspection requirements as specified herein. Except as otherwise specified in the contract or order, the supplier may use his own or any other facilities suitable for the performance of the inspection requirements specified herein, unless disapproved by the Government. The Government reserves the right to perform any of the inspections set forth in this specification where such inspections are deemed necessary to assure supplies and services conform to the prescribed requirements.

4.1.1 Certificate of compliance.- Where certificates of compliance are submitted, the Government reserves the right to check test such items to determine the validity of the certification.

4.2 First article inspection.- When required, the first article submitted in accordance with 3.2 shall be inspected for compliance with design, construction, workmanship, appearance, and dimensional requirements.

4.3 Inspection.- Inspection shall be performed in accordance with MIL-STD-105, except where otherwise indicated in MIL-STD-1490 or MIL-STD-1488.

4.3.1 Component and material inspection.- In accordance with 4.1 above, components and materials shall be inspected and tested in accordance with the requirements of referenced specifications, drawings, and standards unless otherwise amended, excluded, modified or qualified in this specification or applicable purchase document. In addition, the supplier shall furnish a certificate of compliance for hook and eye requirements of 3.3.7, and a certificate of compliance that all metal components of slide fastener are from the same supplier (see 3.3.8).

4.3.2 Examination of the end item.- The end item examination provisions for finished trousers shall be as specified for dress ("D") trousers in MIL-STD-1488. The end item examination provisions for finished coats shall be as specified for dress coats in MIL-STD-1490 and in accordance with the list.

Source: https://assist.dla.mil -- Downloaded: 202640-18T10:26Z
Check the source to verify that this is the current version before use.

Defect	Point Value
I. Collar	
a. Interlining omitted	3
b. Collar ends uneven in width by:	
1. 1/4 to 1/2 inch inclusive	1
2. More than 1/2 inch	2
c. Less than 1-7/8 inches or more than 2 inches wide	1
d. Inner collar exposed beyond edge of outer collar at top edge or ends	2
e. Step on right front extends less than 1-1/4 inches or more than 1-1/2 inches from end of collar	1
f. Step on left front extends less than 1/2 inch or more than 3/4 inch from end of collar	1
II. Hooks and eyes	
a. Hook or eye damaged affecting function or not securely attached	3
b. Hook or eye not positioned as specified causing a bulge, twist, distortion or puckers on outside	3
III. Herringbone tape	
Omitted, not covering base of hooks or insecurely hand stitched	1
IV. Collar tab	
a. Not securely box-stitched or hand-tacked to inner collar	2
b. Hand-tacking not covering stitches at base of eyes	1
c. Less than 2-1/2 inches or more than 2-3/4 inches long	1
d. Exposed above top edge of collar	2
e. Free end extending beyond finished edge of collar less than 1/4 inch or more than 1/2 inch at bottom or less than 1/2 inch or more than 3/4 inch at top (see Note below)	1
f. Less than 1-1/2 inches or more than 1-3/4 inches wide at folded edge of free end (see Note below)	1

Source: https://assist.dla.mil -- Downloaded: 202610-18T10:26Z
Check the source to verify that this is the current version before use.

Defect	Point Value
V. Fronts	
a. Front and bottom edges:	
1. Tape set too tight, causing puckering	2
2. Bottom edge stretched or uneven	1
3. Edge stitching at bottom not extending to the back edge of facing	1
b. Front openings:	
1. Unbuttoned fronts uneven in length by 1/2 inch or more	2
2. Distance of bottom buttonhole and button-eyelet from bottom edge uneven by more than 3/8 inch	1
3. Distance of top buttonhole and button-eyelet from edge of collar uneven by more than 1/8 inch	1
NOTE: Score defects IVe and f only when the width of the tab or the extension of the free end are insufficient to properly cover the buttoned hooks.	
VI. Alignment of front buttonholes and button-eyelets	
a. Buttonholes or eyelets not vertically aligned by more than 1/4 inch	2
b. Buttonholes positioned less than 1/2 inch or more than 3/4 inch from finished left front edge	1
c. Second buttonhole from top not aligned with top edge of pocket flap by:	
1. 1/4 inch to 3/8 inch inclusive	1
2. More than 3/8 inch	2
d. Top buttonhole positioned less than 5/8 inch or more than 7/8 inch from top edge of front step	1
e. Eyelets positioned less than 1-3/8 inches or more than 1-5/8 inches from finished right front edge	1
f. Eyelets not constructed through interlining	2
VII. Darts	
a. Inside folded edge not turned towards armhole	1
b. Not extending to top edge of flaps by more than 3/8 inch	1

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T10:26Z
Check the source to verify that this is the current version before use.

Defect	Point Value
VIII. Pockets	
a. Top edge of finished pocket less than 1/4 inch or more than 1/2 inch below topstitching of flap	1
b. Length of right and left pocket assemblies (top edge of flap to bottom edge of pocket) uneven in length by:	
1. 1/4 to 1/2 inch inclusive	1
2. More than 1/2 inch	2
c. Pocket hem for all sizes less than 7/8 inch or more than 1-1/8 inches in width	1
IX. Front facings and interlining	
a. Facings long, causing bottom corners of fronts to curl up	3
b. Back edge of left facing not stitched to front	2
X. Shoulder	
Back parts not lapped over fronts	1
XI. Shoulder loops	
a. Not securely tacked or caught in shoulder seam	2
b. Opening of loop near armhole less than 1-1/4 inches or more than 1-1/2 inches	1
c. Opening of loop near neck less than 7/8 inch or more than 1-1/8 inches	1
XII. Sleeves and armholes	
a. Sleeve backarm seam and seam joining side body piece to back are not aligned by 1/4 inch or more at armhole	2
b. Bottom hem of sleeve less than 1-3/4 inches or more than 2-1/4 inches wide	1
XIII. Back	
a. Left center back piece not lapped on top of right center back piece	1
b. Center back pieces not lapped on top of side body pieces	1
c. Side body pieces not lapped on top of fronts	1

Source: https://assist.dla.mil -- Downloaded: 202610-18T10:26Z
Check the source to verify that this is the current version before use.

Defect	Point Value
XIV. Swordslit	
a. Hem less than 1/4 inch or more than 1/2 inch wide	1
b. Ends of opening not securely bartacked	1
XV. Seam binding	
a. Fabric edges not securely caught in binding	1
b. Binding tight, causing puckers on outside of coat or seams to curl and not lie flat	2

4.3.3 Dimensional examination.- The dimensional examination provisions for the finished trousers and coats shall be as specified in MIL-STD-1488 and MIL-STD-1490 respectively.

4.3.4 Examination of preparation for delivery requirements.- The examination for compliance with packaging, packing and marking requirements shall be as specified in MIL-STD-1488 and MIL-STD-1490.

4.3.5 Matching of coat and trousers for shade (when purchased as a uniform). Any uniform mismatched in shade shall cause rejection of the lot.

5. PREPARATION FOR DELIVERY

5.1 Packaging.- Packaging shall be level A or C as specified (see 6.2).

5.1.1 Level A.-

5.1.1.1 Folding of coat.- Each coat shall be laid out flat, front up. The buttonhole front shall overlap the button front. The sleeves shall be positioned full length resting naturally over the coat front. The coat shall then be folded in half by bringing the shoulders down even with the bottom edge of the coat with the collar tucked in between. The completely folded coat shall measure approximately 23 by 14-1/2 inches.

5.1.1.2 Folding of trousers.- Each pair of trousers with inseams meeting, shall be folded from the leg bottom up toward the waistband to an overall length of approximately 23 inches. For larger sizes it may be necessary to adjust the seat area to achieve the desired width of approximately 14-1/2 inches.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T10:26Z
Check the source to verify that this is the current version before use.

5.1.1.3 Uniform.- A uniform consisting of a coat and trousers of one size only shall be packaged as follows: The coat folded as specified in 5.1.1.1 shall be placed on top of the trousers folded as specified in 5.1.1.2. Each folded uniform, measuring approximately 23 by 14-1/2 inches, shall be inserted into a snug-fitting clear polyethylene film bag of 0.00125 (± 20 percent tolerance). The bag shall be formed with heat sealed seams that are straight, continuous and parallel to each other and the formed edges of the bag. The final closure of the bag shall be heat sealed with the seal made as close as possible to the open end. A 1/4 inch diameter hole shall be made at one corner of the polyethylene bag to allow excess air to escape. As an alternate, the polyethylene bag may be the tuck-in overlap type, heat seal closure and corner hole not required.

5.1.2 Level C (Commercial packaging).- Uniforms shall be packaged to afford adequate protection against physical damage during shipment from the supplier to the first receiving activity. The package and the quantity per package shall be the same as that normally used by the supplier for retail distribution.

5.2 Packing.- Packing shall be level A, B, or C as specified (see 6.2).

5.2.1 Level A.- Six uniforms, of one description only, packaged as specified in 5.1, shall be packed in a fiberboard shipping container assembled, closed and reinforced conforming to class weather-resistant, grade V2s, size 2A of MIL-B-17757. The fiberboard for the box liner shall conform to type CF, class weather-resistant, variety DW, grade V15c of MIL-B-17757. Level A packages shall be packed flat, six in depth within the shipping container. Each container shall have the contents completely covered on the top and bottom with a sheet of commercial grade kraft paper. Toward the end of the contract or when there are less than the required amount per container of the same size, mixed sizes may be packed within the same shipping container.

5.2.2 Level B.- Six uniforms, of one description only, packaged as specified in 5.1, shall be packed in a fiberboard shipping container assembled and closed conforming to class domestic, grade 200, size 2A of MIL-B-17757. The fiberboard for the box liner shall conform to type CF, class domestic, variety DW, grade 200 of MIL-B-17757. Level A packages shall be packed flat, six in depth within the shipping container. Each container shall have the contents completely covered on the top and bottom with a sheet of commercial grade kraft paper. Toward the end of the contract or when there are less than the required amount per container of the same size, mixed sizes may be packed within the same shipping container.

5.2.2.1 When specified (see 6.2), the shipping container shall be a grade V3c, V3s or V-s fiberboard box fabricated in accordance with MIL-B-17757 and closed in accordance with the appendix of the box specification.

Source: https://assist.dla.mil -- Downloaded: 202610-18T10:26Z
Check the source to verify that this is the current version before use.

5.2.3 Level C (Commercial packing).- Uniforms packaged as specified in 5.1 shall be packed in a manner to insure carrier acceptance and safe delivery at destination at the lowest transportation rate for such supplies. The quantity per shipping container shall be the same as that normally used by the supplier for retail distribution. Containers shall comply with the U.S. Postal Service Manual, Uniform Freight Classification Rules or National Motor Freight Classification Rules, as applicable.

5.3 Marking.- In addition to any special marking required by the contract or order, interior packages and shipping containers shall be marked in accordance with MIL-STD-129.

5.3.1 Polyethylene bagged packages.- Polyethylene bagged packages shall have the required identification information listed below legibly printed or stamped in black directly on the bag across the center face or on a white paper label inserted within the bag so as to permit ready identification. The bag or label shall only indicate the following information:

STOCK NUMBER
ITEM DESCRIPTION
SIZE
QUANTITY

5.3.2 Labels, mixed sizes.- Each shipping container, packed with mixed sizes, shall have securely attached to the end and side, directly under the printing or stenciling a white paper label 5 by 4 inches with the words "MIXED SIZES" plainly stamped or printed thereon and under these words shall be legibly stamped or printed the correct quantity and sizes contained therein.

6. NOTES

6.1 Intended use.- The uniform is intended for wear by male Naval Officers, Naval Academy Midshipmen, NROTC, and Naval Aviation Cadets as their summer dress uniform.

6.2 Ordering data.- Procurement documents should specify the following:

(a) Title, number and date of this specification.
(b) Sizes and lengths required (see 1.2).
(c) Whether first article sample is required (see 3.2).
(d) Levels of packaging and packing required (see 5.1 and 5.2).
(e) When weather-resistant grade fiberboard shipping containers are required for level B packing (see 5.2.2.1).

6.3 Samples and patterns.- For access to samples and patterns, address the procuring activity issuing the invitation for bids.

Custodian:
Navy - SA

Preparing activity:
Navy - SA

Project No. 8405-N595

Source: https://assist.dla.mil -- Downloaded: 202610-18T10:26Z
Check the source to verify that this is the current version before use.


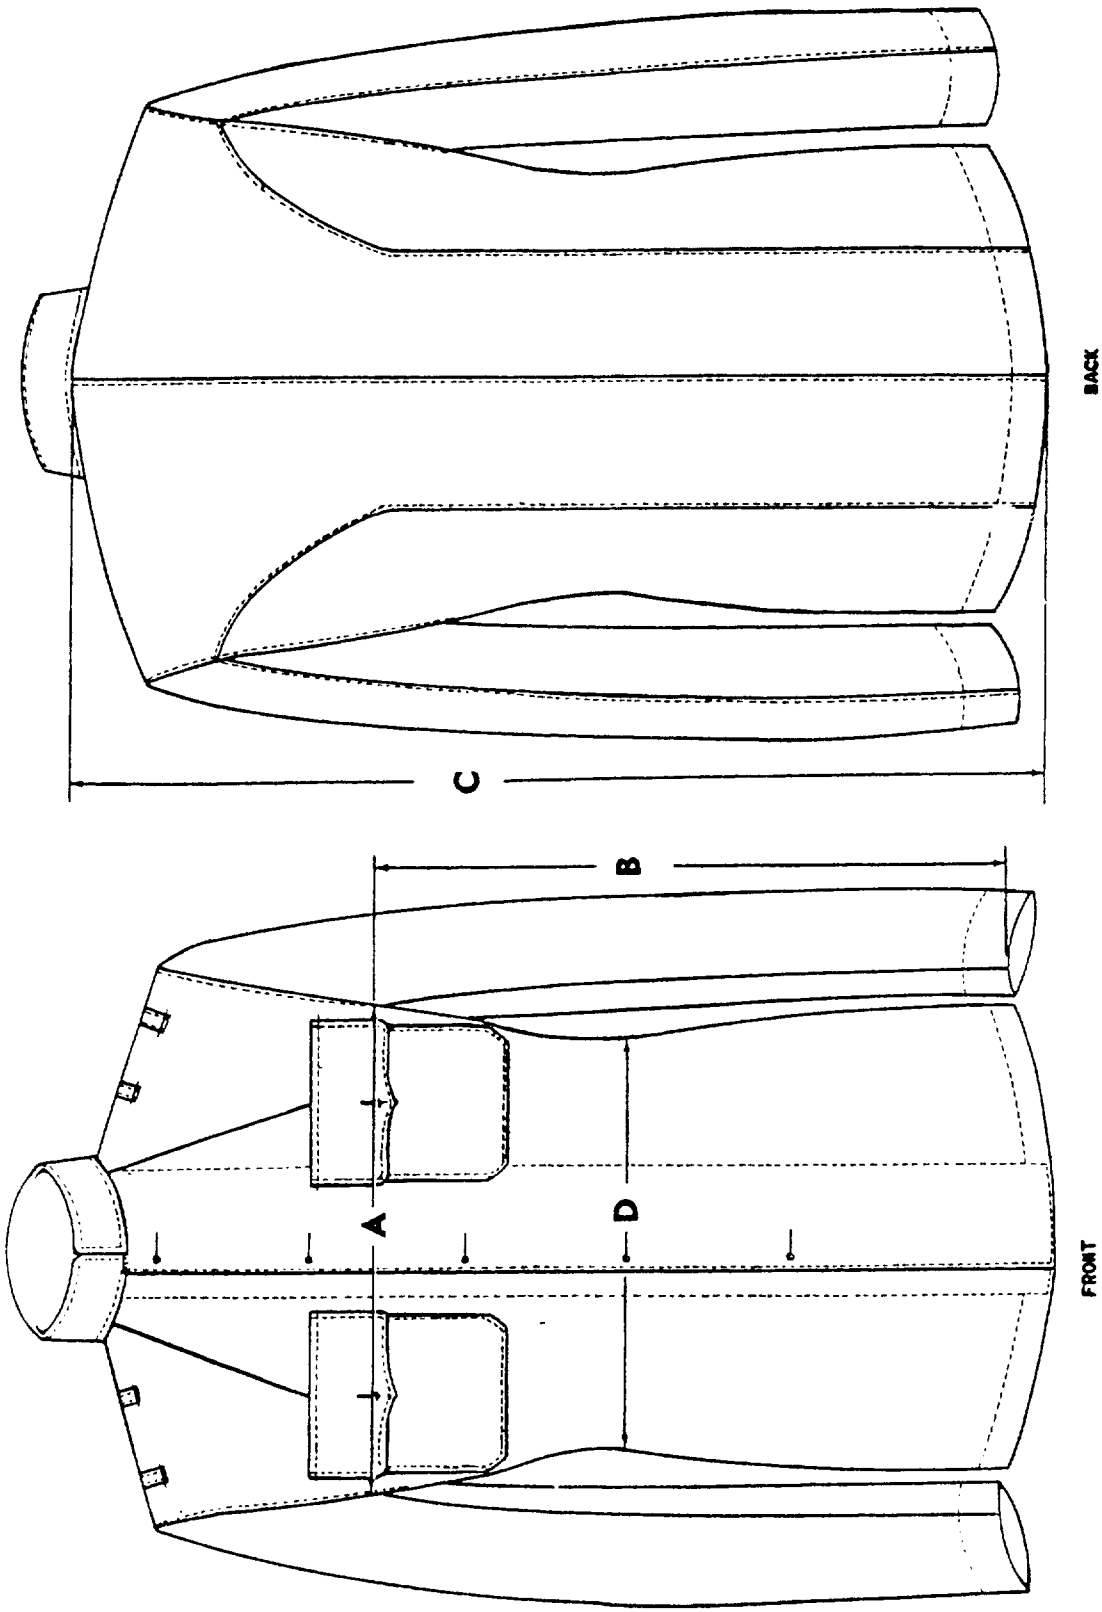


FIGURE 1. UNIFORM, MANS (DRESS, WHITE)


Source: https://assist.dla.mil -- Downloaded: 2026-10-18T10:26Z
Check the source to verify that this is the current version before use.

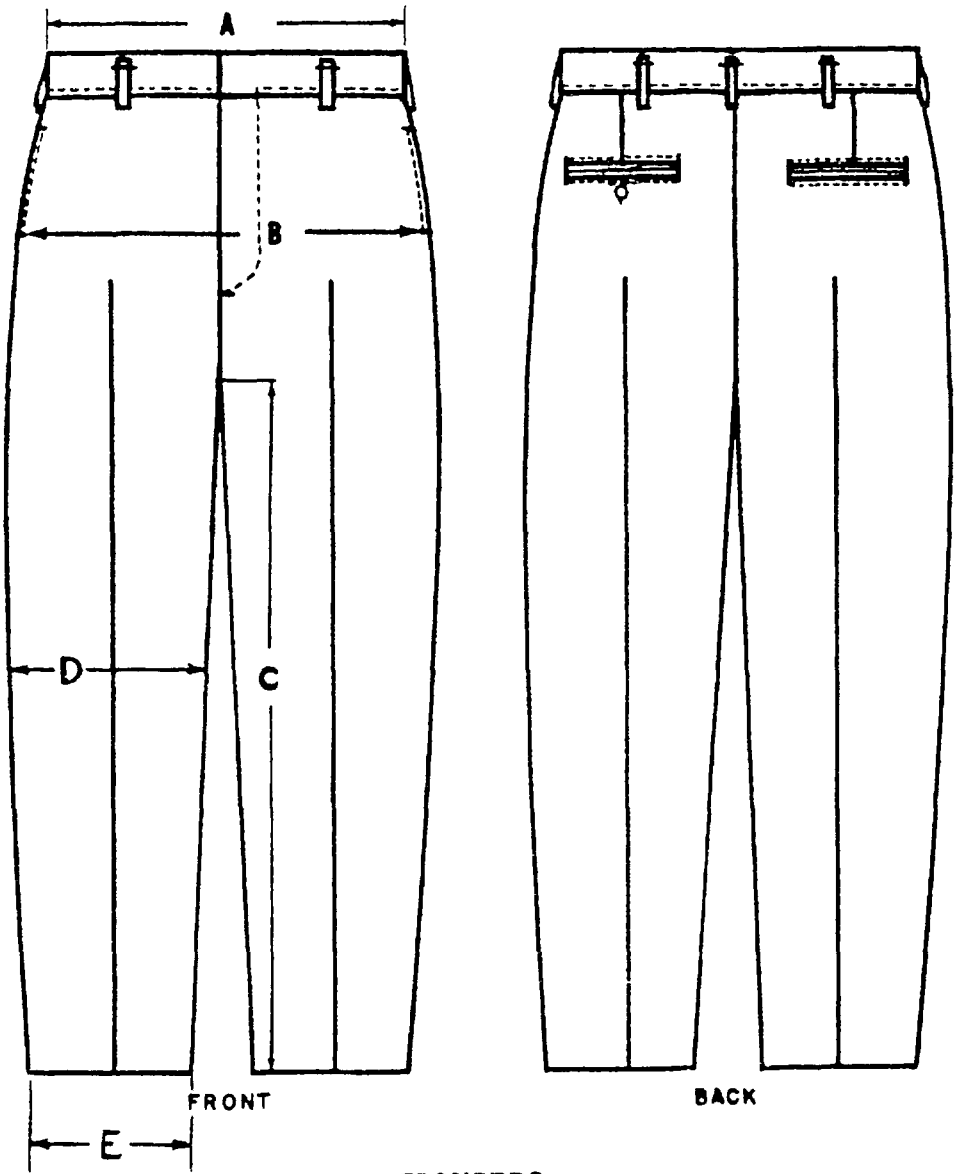

TROUSERS

FIGURE 2 - UNIFORM, MAN'S (DRESS, WHITE)

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T10:26Z
Check the source to verify that this is the current version before use.

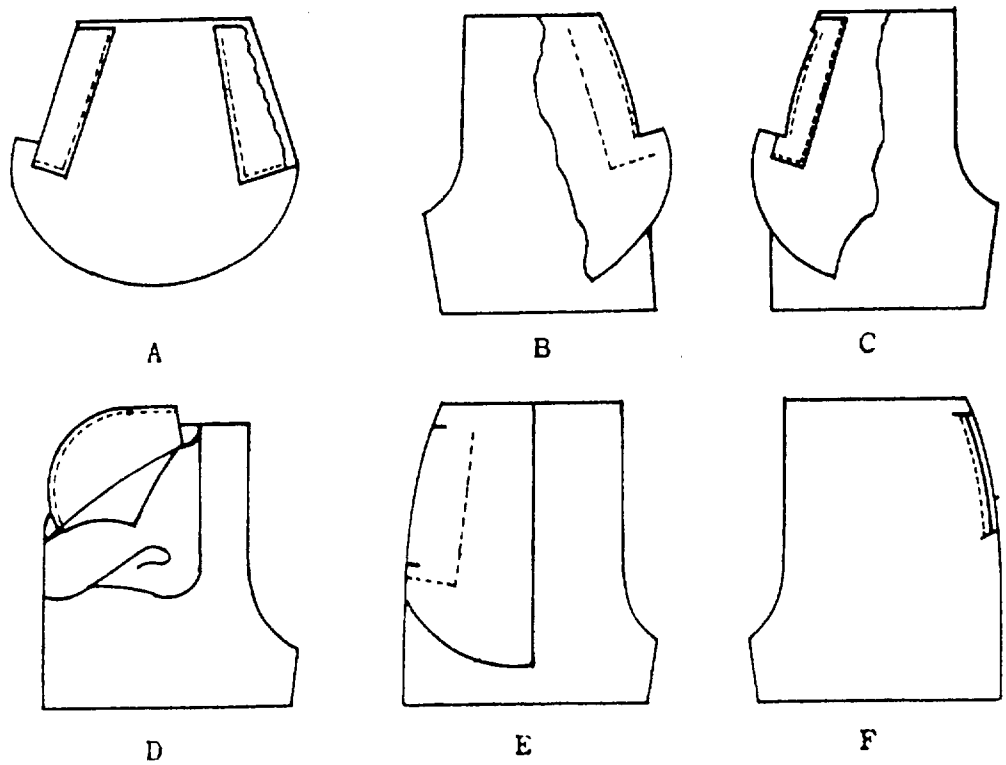


SIDE POCKET

A - Stitch facing and bearer to pocket
B - Stitch pocket to front
C - Turn pocket and top stitch
D & E - Seamed and turned
F - Tack pocket opening to bearer
G - Finished pocket

Figure 3 UNIFORM, MAN'S (DRESS, WHITE)

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T10:26Z
Check the source to verify that this is the current version before use.

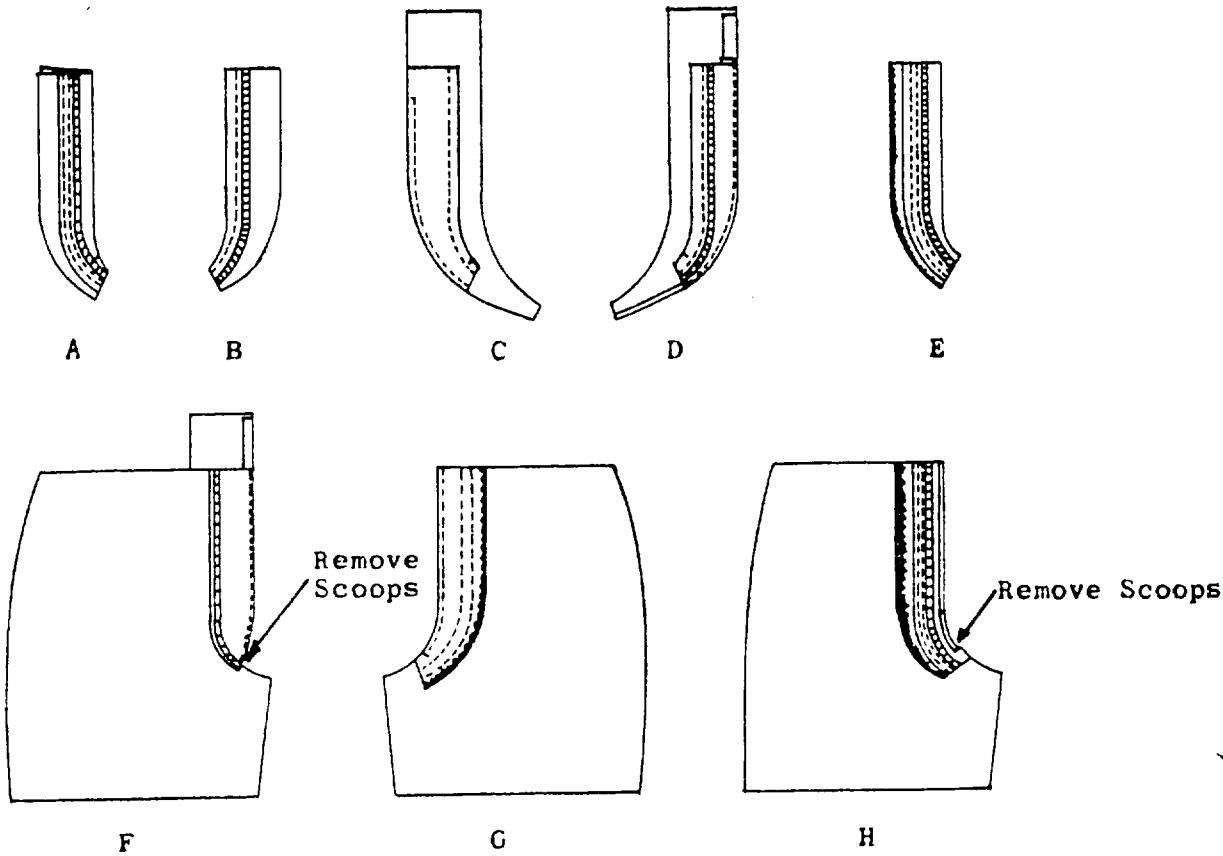


FLY (RIGHT AND LEFT)


A - Double stitch fastener tape to left fly through lining
B - Seam fastener tape to right fly
C & D - Seam lining to right fly, turn and top stitch
E - Overedge left fly
F - Join right fly to trousers
G & H - Join left fly to trousers and press

Figure 4 - UNIFORM, MAN'S (DRESS, WHITE)


Source: https://assist.dla.mil -- Downloaded: 202610-18T10:26Z
Check the source to verify that this is the current version before use.

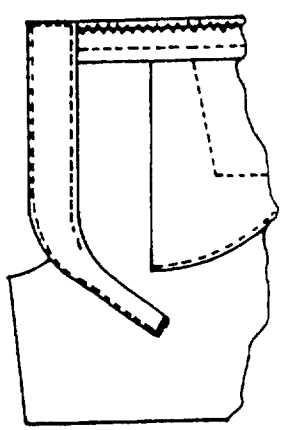


J

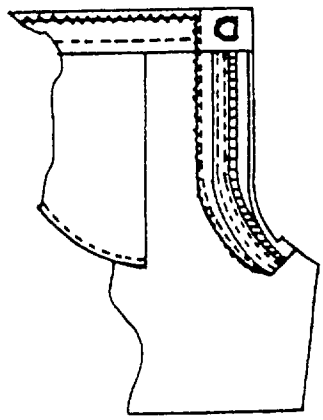

K

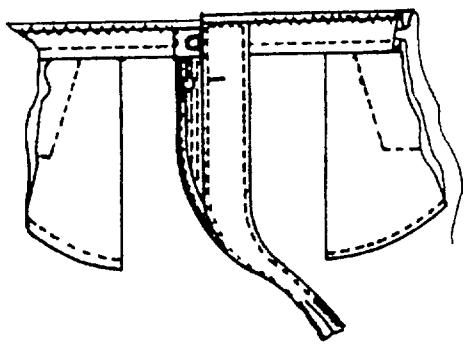

L

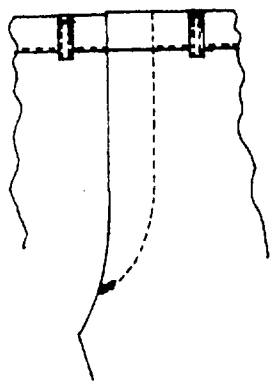


M

FLY (RIGHT AND LEFT)

J - Topstitch right fly catching lining
K - Topstitch back edge of left fly through trouser
L - Finish end of right fly lining
M - Bartack base of finished fly

Figure 5 - UNIFORM, MAN'S (DRESS, WHITE)

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T10:26Z
Check the source to verify that this is the current version before use.

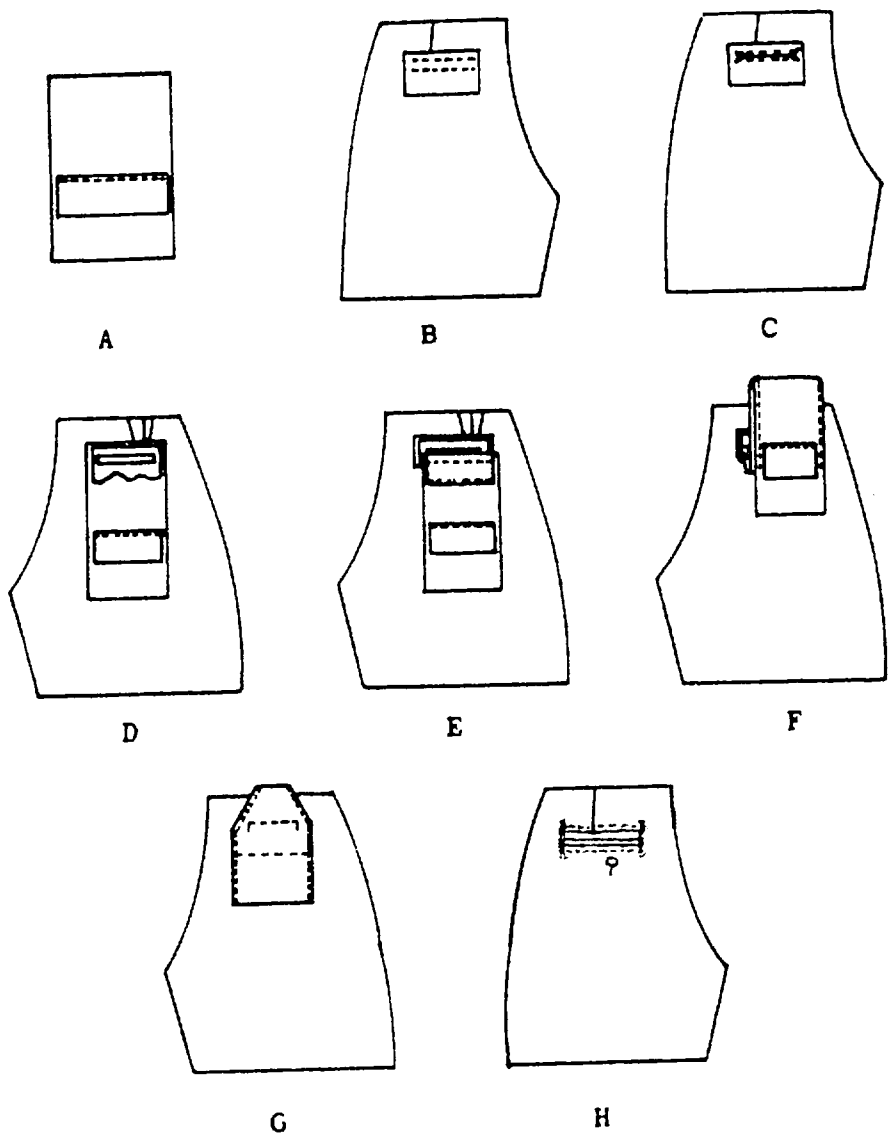

HIP POCKET

A - Bearer on pocket
B - Welt facing piece on outside of trousers
C - Cut through welt piece and notch
D - Welt piece turned inside
E - Make welt
F - Pocket pulled through and closed
G - Pocket pulled through to inside and top stitched on sides
H - Top pocket opening stitched through pocket and facing piece

Figure 6 - UNIFORM, MAN'S (DRESS, WHITE)

☆U.S. GOVERNMENT PRINTING OFFICE: 1976-603-128/1117

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T10:26Z
Check the source to verify that this is the current version before use.

SPECIFICATION ANALYSIS SHEET

Form Approved
Budget Bureau No. 22-R255

INSTRUCTIONS: This sheet is to be filled out by personnel, either Government or contractor, involved in the use of the specification in procurement of products for ultimate use by the Department of Defense. This sheet is provided for obtaining information on the use of this specification which will insure that suitable products can be procured with a minimum amount of delay and at the least cost. Comments and the return of this form will be appreciated. Fold on lines on reverse side, staple in corner, and send to preparing activity. Comments and suggestions submitted on this form do not constitute or imply authorization to waive any portion of the referenced document(s) or serve to amend contractual requirements.

SPECIFICATION

MIL-U-17658D(SA); Uniform, Man's (Dress, White)

ORGANIZATION

CITY AND STATE

CONTRACT NUMBER

MATERIAL PROCURED UNDER A

☐ DIRECT GOVERNMENT CONTRACT ☐ SUBCONTRACT

1. HAS ANY PART OF THE SPECIFICATION CREATED PROBLEMS OR REQUIRED INTERPRETATION IN PROCUREMENT USE?

A. GIVE PARAGRAPH NUMBER AND WORDING.

B. RECOMMENDATIONS FOR CORRECTING THE DEFICIENCIES

2. COMMENTS ON ANY SPECIFICATION REQUIREMENT CONSIDERED TOO RIGID

3. IS THE SPECIFICATION RESTRICTIVE?

☐ YES ☐ NO *(If "yes", in what way?)*

4. REMARKS *(Attach any pertinent data which may be of use in improving this specification. If there are additional papers, attach to form and place both in an envelope addressed to preparing activity)*

SUBMITTED BY *(Printed or typed name and activity - Optional)*

DATE

DD FORM 1 JAN 66 1426

REPLACES EDITION OF 1 OCT 64 WHICH MAY BE USED.

S/N-0102-014-1801 C-25254

Source: https://assist.dla.mil -- Downloaded: 202640-18T10:26Z
Check the source to verify that this is the current version before use.

FOLD

Officer in Charge
Navy Clothing and Textile Research Unit
21 Strathmore Road
Natick, MA 01760

POSTAGE AND FEES PAID

OFFICIAL BUSINESS

Officer in Charge
Navy Clothing and Textile Research Unit
21 Strathmore Road
Natick, MA 01760

FOLD

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T10:26Z
Check the source to verify that this is the current version before use.