FEDERAL SPECIFICATION

HOLDER, PATIENT'S BED-TRAY CARD

This specification was approved by the Commissioner, Federal Supply Service, General Services Administration, for the use of all Federal agencies.

1. SCOPE

1.1 This specification covers one type of corrosion-resisting steel identification card holder, suitable for use in hospital-ward serving kitchens to hold a bed-tray card, used as a means of identification for trays and nourishment service.

2. APPLICABLE SPECIFICATIONS AND STANDARDS

2.1 The following specifications and standards, of the issues in effect on date of invitation for bids, form a part of this specification:

Federal Specifications:

QQ-S-766 — Steel, Corrosion-Resisting, Plates, Sheets, Strips, and Structural Shapes.

PPP-B-566 — Boxes, Folding, Paperboard.

PPP-B-585—Boxes; Wood, Wirebound.

PPP-B-601—Boxes, Wood, Cleated-Plywood.

PPP-B-621—Boxes, Wood, Nailed and Lock-Corner.

PPP-B-676—Boxes, Set-up, Paperboard.

Federal Standards:

Fed. Std. No. 102—Preservation, Packaging and Packing Levels.

Fed. Std. No. 123—Marking For Domestic Shipment (Civilian Agencies).

Fed. Test Method Std. No. 151—Metals; Test Methods.

(Activities outside the Federal Government may obtain copies of Federal Specifications, Standards, and Handbooks as outlined under General Information in the Index of Federal Specifications, Standards, and Handbooks and at the prices indicated in the Index. The Index, which includes cumulative monthly supplements as issued, is for sale on a subscription basis by the Superintendent of Documents, U. S. Government Printing Office, Washington 25, D. C.

(Single copies of this specification and other product specifications required by activities outside the Federal Government for bidding purposes are available without charge at the General Services Administration Regional Offices in Boston, New York, Atlanta, Chicago, Kansas City, Mo., Dallas, Denver, San Francisco, Los Angeles, Seattle, and Washington, D. C.

(Federal Government activities may obtain copies of Federal Specifications, Standards, and Handbooks and the Index of Federal Specifications, Standards, and Handbooks from established distribution points in their agencies.)

Military Specifications:

MIL-B-10377—Box, Wood, Cleated, Veneer, Paper Overlaid.

MIL-L-10547—Liners, Case, Waterproof.

Military Standards:

MIL-STD-105 — Sampling Procedures and Tables for Inspection by Attributes.

MIL-STD-129—Marking for Shipment and Storage.

(Copies of Military Specifications and Standards required by contractors in connection with specific procurement functions should be obtained from the procuring activity or as directed by the contracting officer.)

FSC 6530

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:51Z
Check the source to verify that this is the current version before use.

3. REQUIREMENTS

3.1 Material. — Material shall be corrosion-resisting steel sheet, conforming to class 1 or 2 of Federal Specification QQ–S–766, and shall meet the requirements for chemical composition specified therein, when tested as specified in 4.4.1.

3.2 Construction. — Holder shall be constructed in accordance with figure 1 and this specification. Holder shall be made of a single piece of 0.025-inch (No. 24, United States Standard gage) corrosion-resisting steel.

3.3 Finish. — All surfaces of the holder shall have a No. 4 commercial finish, and when tested as specified in 4.4.2 total surface area showing corrosion shall not exceed 2 percent.

3.4 Identification marking. — Each holder shall have impressed thereon the following information:

Stock number
Manufacturer's name or registered trademark
Contract or order number
U. S.

3.5 Workmanship. — Workmanship shall be first class throughout. Holders shall be free from defects which detract from their appearance or which may affect their serviceability. Holders shall be free of burrs, sharp edges, and die marks.

4. SAMPLING, INSPECTION, AND TEST PROCEDURES

4.1 Supplier responsibilities for inspection. —Such examinations and tests as are set forth in this specification or as shall otherwise be appropriate or necessary to insure that supplies conform to specification requirements shall be performed by and at the expense of the supplier. Suppliers who do not have facilities adequate for such tests shall arrange for the use of test facilities acceptable to the Government. Records of examinations and tests performed by the supplier shall be maintained by the supplier and made available to the Government, upon the Government's request, at any time, or from time to time, for a period of 2 years after delivery of the supplies to which such records relate.

4.1.1 Inspection, as used in this specification, is defined as both examination (such as visual, auditory, etc., investigation without the use of special laboratory appliances or procedures) and testing (determination by technical means of physical and chemical properties) of the item.

4.1.2 *Certificates of quality.*—When available, certificates of quality, supplied by the manufacturer of the component or material, listing the specified test method and test results obtained may be furnished in lieu of actual performance of such testing by the contractor.

4.2 Sampling. — Sampling shall be conducted in accordance with Military Standard MIL–STD–105.

	Inspection level	AQL (percent defective)	Minimum sample size
For visual examination:			
Major defects	II	1.0	--
Minor defects	L4	4.0	--
For dimensional examination	L2	2.5	--
For tests	L2	*	3

* Acceptance number shall be zero for all sample sizes.

4.2.1 *Raw materials.*—Four ounces of each lot of metal used in the construction of the holders shall be selected for chemical analysis.

Source: https://assist.dla.mil -- Downloaded: 202640-26T11:51Z
Check the source to verify that this is the currentversion before use.

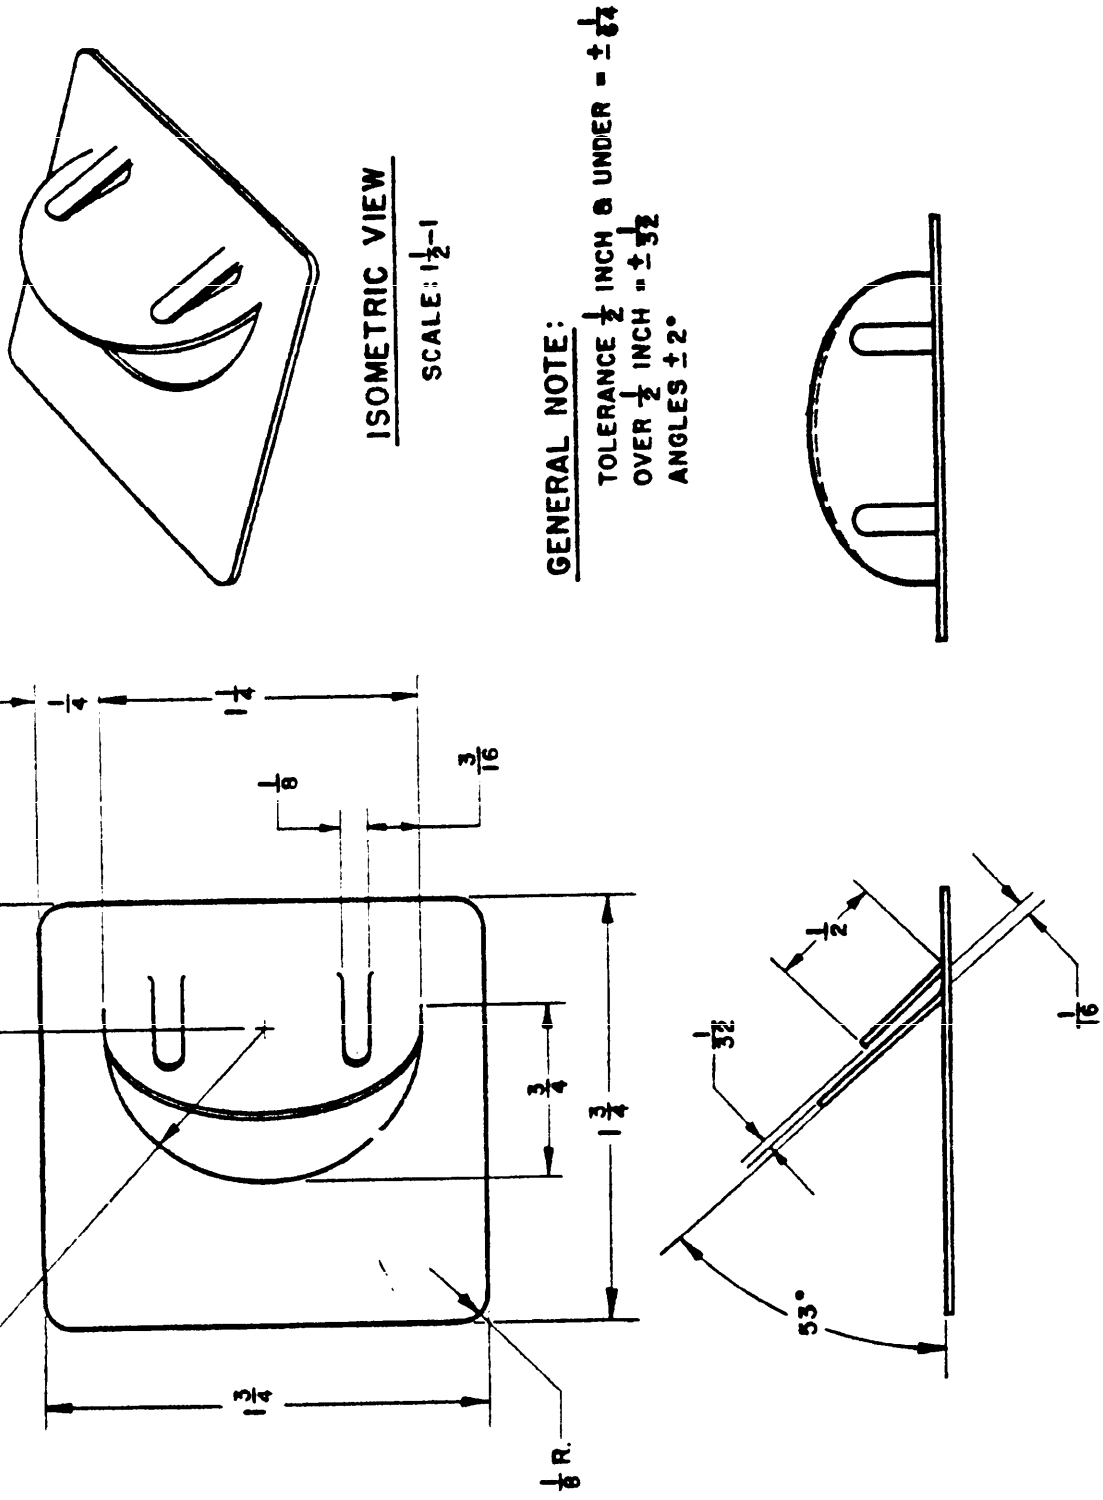


FIGURE 1.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:51Z
Check the source to verify that this is the current version before use.

4.2.2 Where possible, the same sample unit shall be used for the determination of two or more test characteristics.

4.3 **Examination.** — The holders shall be examined to determine compliance with all requirements contained in this specification. Nonconformance with these requirements will be permitted to the extent indicated in 4.2.

4.3.1 *Classification of defects.*—Examination shall be conducted in accordance with the following classification of defects:

*Categories and defects***

Major

101. Holder not one piece.
102. Corners not rounded.
103. Complete holder not free of sharp edges and burs.
104. Finish not No. 4 (commercial).

Minor

201. Identification markings not present and complete.
202. Holder not clean and free from oil, dirt, chips, excessive scratching, or die marks.

** Examination shall not be restricted to the classified possible defects listed above.

4.3.2 *Dimensional examination.*—The holders shall be examined for defects in dimensions. Any dimension not within the tolerances specified herein shall be classified as a defect.

4.4 **Tests.** — Tests shall be conducted, as necessary, to determine compliance with specification requirements.

4.4.1 *Chemical composition.* — Tests for chemical analysis shall be conducted in accordance with method 111 or 112 of Federal Test Method Standard No. 151.

4.4.2 *Boil test.*—Before testing, the holders shall be scrubbed with soap and water and rinsed in distilled water. After cleaning, the holders shall be boiled in distilled water in a glass container for 30 minutes and allowed to remain submerged for 24 hours.

5. PREPARATION FOR DELIVERY

For civil agency procurement the definitions and applications of the levels of preservation, packaging, and packing should be in accordance with Federal Standard No. 102.

5.1 **Packaging.**

5.1.1 *Unit of issue.*—One holder, as specified, constitutes one unit.

5.1.2 *Packaging quantities.*—The number of units of issue indicated in table I shall be packaged in each intermediate and exterior container, as applicable, for the required level of protection specified in the procurement document.

TABLE I.—*Packaging quantities*

Unit package	*Intermediate package*	*Exterior container*
Not required	24 units	1,728 units

5.1.2.1 *Packing variation permitted.* — If the required number of units to be shipped is less than the number of units specified to be overpacked in an exterior container, such units shall be packed in an exterior container of suitable size and design, acceptable to a common carrier, which will insure safe delivery to destination.

5.1.3 *Level A.*

5.1.3.1 *Intermediate package.*—Intermediate package shall be a carton of appropriate size constructed in accordance with Federal Specification PPP–B–566 or PPP–B–676. Each carton shall be adequately secured to prevent accidental opening.

Source: https://assist.dla.mil -- Downloaded: 202610-26T11:51Z
Check the source to verify that this is the current version before use.

5.1.4 *Level C.*—Units shall be packaged in standard commercial containers of the size and kind commonly used, which will afford the degree of protection required for shipment and use of the product for its intended purpose within the continental limits of the United States of America.

5.2 Packing.

5.2.1 *Level A.*

5.2.1.1 *Exterior container.*—Exterior container shall be designed for type 2 load and constructed in accordance with Federal Specification PPP–B–585, style 3, for class 3 use; Federal Specification PPP–B–601, table II. using type III, class 1 plywood; Federal Specification PPP–B–621, table III; or Military Specification MIL–B–10377, table II.

5.2.1.2 *Case liner.*—Each level A box shall be lined with a waterproof case liner conforming to Military Specification MIL–L–10547. Closure and sealing shall conform to applicable paragraphs of appendix thereto.

5.2.1.3 *Strapping.* — Strapping, when required, shall be in accordance with applicable box specifications.

Note.—Strapping will not be required for shipments forwarded to a receiving activity within the continental limits of the United States for storage and redistribution.

5.2.2 *Level B.*

5.2.2.1 *Exterior container.*—Exterior container shall conform to Federal Specification PPP–B–601, table I, using type III, class 1 plywood, or shall be designed for type 2 load and constructed in accordance with Federal Specification PPP–B–585, style 3, for class 2 use; Federal Specification PPP–B–621, table I; or Military Specification MIL–B–10377, table I.

5.2.3 *Level C.* — The subject commodity shall be packed in substantial commercial containers of the type, size, and kind commonly used for the purpose, so constructed as to insure acceptance and safe delivery by common or other carriers, at the lowest rate, to point of delivery called for in the contract or purchase order.

5.3 Marking.

5.3.1 *Intermediate packages—military.*—Each intermediate package shall be marked in accordance with section 5 of Military Standard MIL–STD–129.

5.3.2 *Exterior container—military.*—Exterior container shall be marked in accordance with Military Standard MIL–STD–129, except that 6.2(c), 6.2(d), 6.5, and 7.5.1 shall not be applicable. Service color and service symbol markings are required only on direct shipments from the contractor's plant to overseas activities.

5.3.3 *Exterior container—nonmilitary.*—In addition to any special marking required by the contract or order, marking shall be in accordance with Federal Standard No. 123.

6. NOTES

6.1 Ordering data. — Purchasers should exercise any desired options offered herein, and procurement documents should specify the following:

(*a*) Title, symbol, and date of this specification.

(*b*) Selection of applicable levels of packaging and packing (see 5.1 and 5.2).

6.2 This specification does not include all types, classes, grades, sizes, etc., of the commodity indicated by the title of the specification, or which are commercially available, but is intended to cover the types, etc., which are normally procured to meet Federal Government requirements.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:51Z
Check the source to verify that this is the current version before use.

6.3 Transportation description. — Transportation description applicable to this item is:

Rail:

Sheet Steel Ware, NOIBN, nested solid or flat.

Carload minimum weight 20,000 pounds subject to Rule 34 of the Uniform Freight Classification.

Motor:

Sheet steel articles, not otherwise indexed. Nested solid or flat.

Motor volume minimum weight 20,000 pounds.

Notice. — When Government drawings, specifications, or other data are used for any purpose other than in connection with a definitely related Government procurement operation, the United States Government thereby incurs no responsibility nor any obligation whatsoever; and the fact that the Government may have formulated, furnished, or in any way supplied the said drawings, specifications, or other data, is not to be regarded by implication or otherwise as in any manner licensing the holder or any other person or corporation, or conveying any rights or permission to manufacture, use, or sell any patented invention that may in any way be related thereto.

CUSTODIANS:
Army—Army Medical Service
Navy—Bureau of Medicine and Surgery
Air Force.

PREPARING ACTIVITY:
Navy—Bureau of Medicine and Surgery (MMSA)

Copies of this specification may be purchased for 5 cents each.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:51Z
Check the source to verify that this is the current version before use.