
FED. SUP CLASS.
5307

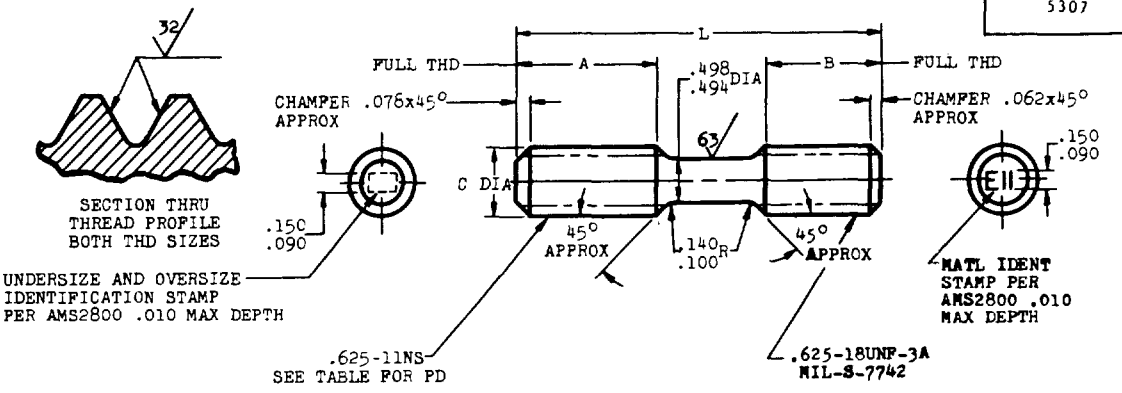

UNDERSIZE AND OVERSIZE IDENTIFICATION			-.003 (-3)	STANDARD	+.003 (3)	+.006 (6)	+.009 (9)	+.012 (12)
C			.620 -.625	.620 -.625	.620 -.625	.620 -.625	.629 -.634	.629 -.634
PD BEFORE PLATING			.5682-.5692	.5712-.5722	.5742-.5752	.5772-.5782	.5802-.5812	.5832-.5842
PD AFTER PLATING			.5687-.5702	.5717-.5732	.5747-.5762	.5777-.5792	.5807-.5822	.5837-.5852
PD LEAD THREAD			.5610-.5630	.5640-.5660	.5670-.5690	.5700-.5720	.5730-.5750	.5760-.5780
L	A	B	PART NUMBER	PART NUMBER	PART NUMBER	PART NUMBER	PART NUMBER	PART NUMBER
2.500	1.250	1.000	AN128099	AN128100	AN128101	AN128102	AN128103	AN128104
2.562	1.250	1.062	AN128105	AN128106	AN128107	AN128108	AN128109	AN128110
2.625	1.250	1.062	AN128111	AN128112	AN128113	AN128114	AN128115	AN128116
2.688	1.250	1.062	AN128117	AN128118	AN128119	AN128120	AN128121	AN128122
2.750	1.250	1.062	AN128123	AN128124	AN128125	AN128126	AN128127	AN128128
2.812	1.562	1.000	AN128129	AN128130	AN128131	AN128132	AN128133	AN128134
2.875	1.562	1.062	AN128135	AN128136	AN128137	AN128138	AN128139	AN128140
2.938	1.562	1.125	AN128141	AN128142	AN128143	AN128144	AN128145	AN128146
3.000	1.562	1.125	AN128147	AN128148	AN128149	AN128150	AN128151	AN128152
3.062	1.562	1.125	AN128153	AN128154	AN128155	AN128156	AN128157	AN128158
3.125	1.562	1.125	AN128159	AN128160	AN128161	AN128162	AN128163	AN128164
3.250	1.562	1.125	AN128165	AN128166	AN128167	AN128168	AN128169	AN128170
3.375	1.562	1.125	AN128171	AN128172	AN128173	AN128174	AN128175	AN128176
3.500	1.562	1.125	AN128177	AN128178	AN128179	AN128180	AN128181	AN128182
3.625	1.562	1.125	AN128183	AN128184	AN128185	AN128186	AN128187	AN128188
3.750	1.562	1.125	AN128189	AN128190	AN128191	AN128192	AN128193	AN128194
3.875	1.562	1.125	AN128195	AN128196	AN128197	AN128198	AN128199	AN128200
4.000	2.250	1.125	AN128201	AN128202	AN128203	AN128204	AN128205	AN128206
4.125	2.250	1.125	AN128207	AN128208	AN128209	AN128210	AN128211	AN128212
4.250	2.250	1.125	AN128213	AN128214	AN128215	AN128216	AN128217	AN128218
4.375	2.250	1.125	AN128219	AN128220	AN128221	AN128222	AN128223	AN128224
4.500	2.250	1.125	AN128225	AN128226	AN128227	AN128228	AN128229	AN128230
4.625	2.250	1.125	AN128231	AN128232	AN128233	AN128234	AN128235	AN128236
4.750	2.250	1.125	AN128237	AN128238	AN128239	AN128240	AN128241	AN128242
4.875	2.250	1.125	AN128243	AN128244	AN128245	AN128246	AN128247	AN128248
5.000	2.250	1.125	AN128249	AN128250	AN128251	AN128252	AN128253	AN128254
5.125	2.250	1.125	AN128255	AN128256	AN128257	AN128258	AN128259	AN128260
5.250	2.250	1.125	AN128261	AN128262	AN128263	AN128264	AN128265	AN128266
5.375	2.250	1.125	AN128267	AN128268	AN128269	AN128270	AN128271	AN128272
5.500	2.250	1.125	AN128273	AN128274	AN128275	AN128276	AN128277	AN128278
5.625	2.250	1.125	AN128279	AN128280	AN128281	AN128282	AN128283	AN128284
5.750	2.250	1.125	AN128285	AN128286	AN128287	AN128288	AN128289	AN128290
5.875	2.250	1.125	AN128291	AN128292	AN128293	AN128294	AN128295	AN128296
6.000	2.250	1.125	AN128297	AN128298	AN128299	AN128300	AN128301	AN128302

INACTIVE FOR DESIGN AFTER 26 OCTOBER 1972. NO SUPERSEDING STANDARD

NOTE: PITCH DIAMETERS OF BOTH THREADED ENDS SHALL BE CONCENTRIC WITHIN .006 FIR.
MATERIAL: STEEL AMS 6322. (AMS 6320 MATERIAL MAY ALSO BE USED FOR THESE PARTS UNTIL 1 JAN 1960.)
HARDNESS: ROCKWELL C26-32.
FINISH: CADMIUM PLATE AMS 2400. DIMENSIONS ARE AFTER PLATING EXCEPT WHERE SHOWN.
SURFACE ROUGHNESS: AS 291
MANUFACTURING SPECIFICATION AMS 7456.
(3) INSPECTION: ALL PARTS SHALL UNDERGO MAGNETIC INSPECTION IN ACCORDANCE WITH AMS2640.
BREAK SHARP EDGES .003-.015 UNLESS OTHERWISE SPECIFIED.
DIMENSIONS IN INCHES. UNLESS OTHERWISE SPECIFIED: TOLERANCES; LINEAR DIMENSIONS ±.010.
DO NOT USE INASSIGNED PART NUMBERS.
THIS STANDARD WAS DEVELOPED COOPERATIVELY WITH THE ENGINE AND PROPELLER UTILITY PARTS COMMITTEE OF THE SAE.

APPROVED 19 May 50 REVISED (1) 23 Jun 58 (2) 26 Oct 72 (3) 30 June 1986

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

NOTICE: When Government drawings, specifications, or other data are used for any purpose other than in connection with a definitely related Government procurement operation, the United States Government thereby incurs no responsibility, nor any obligation whatsoever; and the fact that the Government may have formulated, furnished, or in any way supplied the said drawings, specifications, or other data is not to be regarded by implication or otherwise as in any manner licensing the holder or any other person or corporation, or conveying any rights or permission to manufacture, use, or sell any patented invention that may in any way be related thereto.

NOTE: This drawing was approved by joint action of the Air Force and Navy Departments as an Air Force-Navy standard for this product. This drawing supersedes all previous Air Force and Navy drawings for this product and shall become effective for the procurement of aeronautical supplies, or for use in new designs, not later than 6 months after the latest date of approval shown.

PA 11 CUST AV, AS 11	AIR FORCE-NAVY AERONAUTICAL STANDARD STUD - STRAIGHT, NECKED, .625-11 x .625-18	AN128087 THRU AN128362

*U.S. GOVERNMENT PRINTING OFFICE: 1987-201-515/3817

Project No. 5307-0353

☆U.S. GOVERNMENT PRINTING OFFICE: 1986 — 605-036/43884

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T14:27Z
Check the source to verify that this is the current version before use.