
DISTRIBUTION STATEMENT A Approved for public release, distribution is unlimited

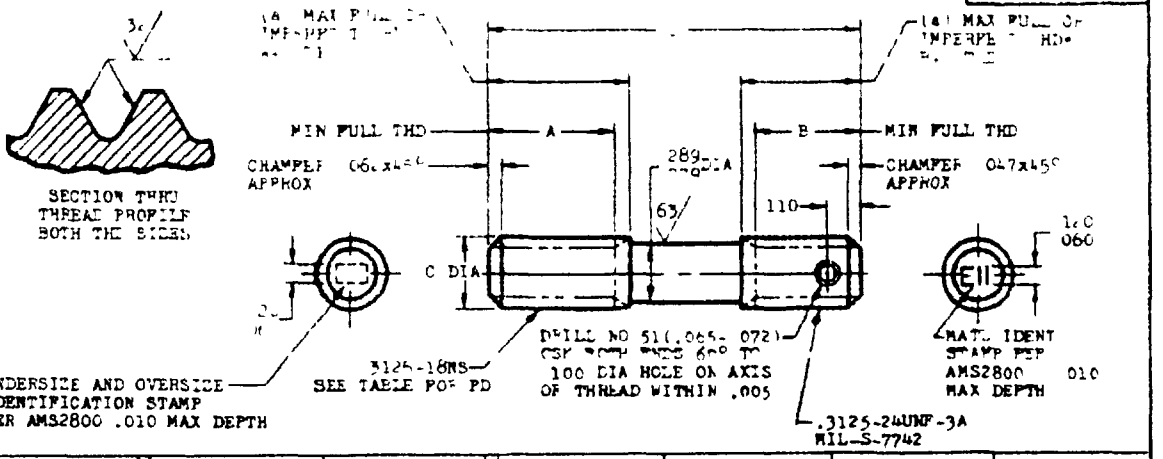

UNDERSIZE AND OVERSIZE IDENTIFICATION			- 003	STANDARD	+ 003	+ 006	+ 009	+ 012
			(-3)		(3)	(6)	(9)	(12)
C			307 - 312	307 - 312	307 - 312	307 - 312	316 - 321	316 - 321
PD BEFORE PLATING			.2775-.2785	.2805- 2815	2835- 2845	.2865- 2875	2895- 2905	.2925-.2935
PD AFTER PLATING			2780- 2790	2810- 2825	2840- 2855	2870- 2885	2900-.2915	.2930- 2945
PD LEAD THREAD			2714- 2734	.2744- 2764	2774- 2794	2804- 2824	2834- 2854	.2864-.2884
L	A	B	PART NUMBER	PART NUMBER	PART NUMBER	PART NUMBER	PART NUMBER	PART NUMBER
1.250	.625	.500	AN128699	AN128700	AN128701	AN128702	AN128703	AN128704
1 312	.688	.500	AN128705	AN128706	AN128707	AN128708	AN128709	AN128710
1 375	.688	.562	AN128711	AN128712	AN128713	AN128714	AN128715	AN128716
1 438	.781	.500	AN128717	AN128718	AN128719	AN128720	AN128721	AN128722
1 500	.844	.500	AN128723	AN128724	AN128725	AN128726	AN128727	AN128728
1.562	.844	.562	AN128729	AN128730	AN128731	AN128732	AN128733	AN128734
1.625	.844	.625	AN128735	AN128736	AN128737	AN128738	AN128739	AN128740
1.688	.844	.625	AN128741	AN128742	AN128743	AN128744	AN128745	AN128746
1 750	.844	.625	AN128747	AN128748	AN128749	AN128750	AN128751	AN128752
1 812	.844	.625	AN128753	AN128754	AN128755	AN128756	AN128757	AN128758
1 875	.844	.625	AN128759	AN128760	AN128761	AN128762	AN128763	AN128764
1.938	.844	.625	AN128765	AN128766	AN128767	AN128768	AN128769	AN128770
2.000	.844	.625	AN128771	AN128772	AN128773	AN128774	AN128775	AN128776
2.062	.844	.625	AN128777	AN128778	AN128779	AN128780	AN128781	AN128782
2.125	.844	.625	AN128783	AN128784	AN128785	AN128786	AN128787	AN128788
2.188	.844	.625	AN128789	AN128790	AN128791	AN128792	AN128793	AN128794
2 250	.844	.625	AN128795	AN128796	AN128797	AN128798	AN128799	AN128800
2.312	.844	.625	AN128801	AN128802	AN128803	AN128804	AN128805	AN128806
2 375	.844	.625	AN128807	AN128808	AN128809	AN128810	AN128811	AN128812
2 500	.844	.625	AN128813	AN128814	AN128815	AN128816	AN128817	AN128818
2 625	.844	.625	AN128819	AN128820	AN128821	AN128822	AN128823	AN128824
2 750	.844	.625	AN128825	AN128826	AN128827	AN128828	AN128829	AN128830
2 875	.844	.625	AN128831	AN128832	AN128833	AN128834	AN128835	AN128836
3 000	.844	.625	AN128837	AN128838	AN128839	AN128840	AN128841	AN128842
3 125	.844	.625	AN128843	AN128844	AN128845	AN128846	AN128847	AN128848
3 250	.844	.625	AN128849	AN128850	AN128851	AN128852	AN128853	AN128854
3 375	.844	.625	AN128855	AN128856	AN128857	AN128858	AN128859	AN128860
3 500	.844	.625	AN128861	AN128862	AN128863	AN128864	AN128865	AN128866
3 625	.844	.625	AN128867	AN128868	AN128869	AN128870	AN128871	AN128872
3 750	.844	.625	AN128873	AN128874	AN128875	AN128876	AN128877	AN128878
3 875	.844	.625	AN128879	AN128880	AN128881	AN128882	AN128883	AN128884
4.000	.844	.625	AN128885	AN128886	AN128887	AN128888	AN128889	AN128890
4 125	.844	.625	AN128891	AN128892	AN128893	AN128894	AN128895	AN128896
4 250	.844	.625	AN128897	AN128898	AN128899	AN128900	AN128901	AN128902
4 375	.844	.625	AN128903	AN128904	AN128905	AN128906	AN128907	AN128908
4 500	.844	.625	AN128909	AN128910	AN128911	AN128912	AN128913	AN128914
4 625	.844	.625	AN128915	AN128916	AN128917	AN128918	AN128919	AN128920
4.750	.844	.625	AN128921	AN128922	AN128923	AN128924	AN128925	AN128926
4 875	.844	.625	AN128927	AN128928	AN128929	AN128930	AN128931	AN128932
5.000	.844	.625	AN128933	AN128934	AN128935	AN128936	AN128937	AN128938

NOTE PITCH DIAMETERS OF BOTH THREADED ENDS SHALL BE CONCENTRIC WITHIN .005 FIR
(a) CROSS THREADING PERMISSABLE AT THREAD RUNOUTS ON SHORT STUDS
MATERIAL STEEL AMS 6322 (AMS 6320 MATERIAL MAY ALSO BE USED FOR THESE PARTS UNTIL 1 JAN 1960)
HARDNESS ROCKWELL C26-32
FINISH CADMIUM PLATE AMS 2400 DIMENSIONS ARE AFTER PLATING EXCEPT WHERE SHOWN
SURFACE ROUGHNESS AS291
MANUFACTURING SPECIFICATION AMS 7456
(2) INSPECTION ALL PARTS SHALL UNDERGO MAGNETIC INSPECTION IN ACCORDANCE WITH AMS2640
BREAK SHARP EDGES 003- 015 UNLESS OTHERWISE SPECIFIED
DIMENSIONS IN INCHES UNLESS OTHERWISE SPECIFIED TOLERANCES, LINEAR DIMENSIONS ± 010
DO NOT USE UNASSIGNED PART NUMBERS
THIS STANDARD WAS DEVELOPED COOPERATIVELY WITH THE ENGINE AND PROPELLER UTILITY PARTS COMMITTEE OF THE SAE

APPROVED 19 May 50 REVISED (1) 23 Jun 58 (2) 30 June 1986

PA 11	AIR FORCE-NAVY AERONAUTICAL STANDARD	AN128687
11	STUD - STRAIGHT, DRILLED	SUPERSEDING AN128998

U S GOVERNMENT PRINTING OFFICE 1986 — 605 036/43886

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T14:27Z
Check the source to verify that this is the current version before use.