
AN161601 THRU AN161900

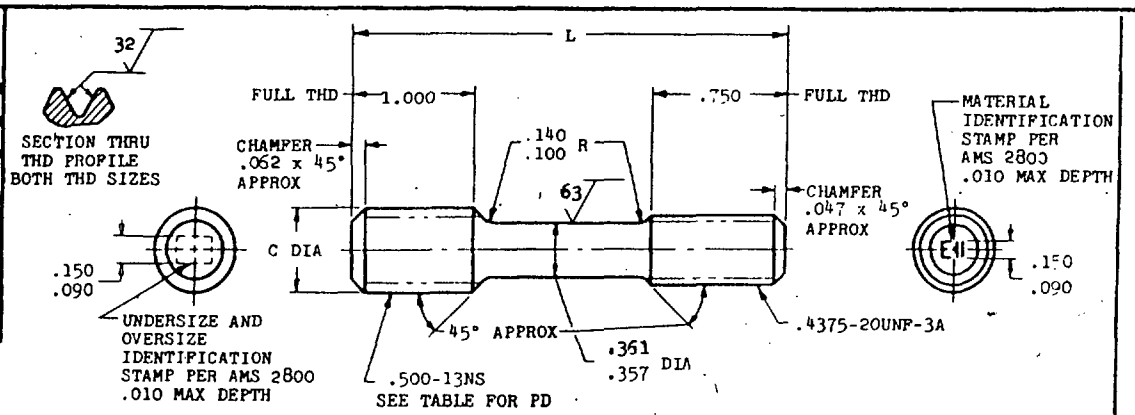

UNDERSIZE AND OVERSIZE IDENTIFICATION	-.003 (-3)	STANDARD	+.003 (3)	+.006 (6)	+.009 (9)	+.012 (12)
C	.495- .500	.495- .500	.495- .500	.495- .500	.504- .509	.504- .509
PD BEFORE PLATING	.4518-.4528	.4548-.4558	.4578-.4588	.4608-.4618	.4638-.4648	.4668-.4678
PD AFTER PLATING	.4523-.4538	.4553-.4568	.4583-.4598	.4613-.4628	.4643-.4658	.4673-.4688
PD LEAD THREAD	.4450-.4470	.4480-.4500	.4510-.4530	.4540-.4560	.4570-.4590	.4600-.4620
L	PART NUMBER	PART NUMBER	PART NUMBER	PART NUMBER	PART NUMBER	PART NUMBER
2.000	AN161613	AN161614	AN161615	AN161616	AN161617	AN161618
2.062	AN161619	AN161620	AN161621	AN161622	AN161623	AN161624
2.125	AN161625	AN161626	AN161627	AN161628	AN161629	AN161630
2.188	AN161631	AN161632	AN161633	AN161634	AN161635	AN161636
2.250	AN161637	AN161638	AN161639	AN161640	AN161641	AN161642
2.132	AN161643	AN161644	AN161645	AN161646	AN161647	AN161643
2.375	AN161649	AN161650	AN161651	AN161652	AN161653	AN161654
2.438	AN161655	AN161656	AN161657	AN161658	AN161659	AN161660
2.500	AN161661	AN161662	AN161663	AN161664	AN161665	AN161666
2.562	AN161667	AN161668	AN161669	AN161670	AN161671	AN161672
2.625	AN161673	AN161674	AN161675	AN161676	AN161677	AN161678
2.688	AN161679	AN161680	AN161681	AN161682	AN161683	AN161684
2.750	AN161685	AN161686	AN161687	AN161688	AN161689	AN161690
2.875	AN161691	AN161692	AN161693	AN161694	AN161695	AN161696
3.000	AN161697	AN161698	AN161699	AN161700	AN161701	AN161702
3.125	AN161703	AN161704	AN161705	AN161706	AN161707	AN161708
3.250	AN161709	AN161710	AN161711	AN161712	AN161713	AN161714
3.375	AN161715	AN161716	AN161717	AN161718	AN161719	AN161720
3.500	AN161721	AN161722	AN161723	AN161724	AN161725	AN161726
3.625	AN161727	AN161728	AN161729	AN161730	AN161731	AN161732
3.750	AN161733	AN161734	AN161735	AN161736	AN161737	AN161738
3.875	AN161739	AN161740	AN161741	AN161742	AN161743	AN161744
4.000	AN161745	AN161746	AN161747	AN161748	AN161749	AN161750
4.125	AN161751	AN161752	AN161753	AN161754	AN161755	AN161756
4.250	AN161757	AN161758	AN161759	AN161760	AN161761	AN161762
4.375	AN161763	AN161764	AN161765	AN161766	AN161767	AN161768
4.500	AN161769	AN161770	AN161771	AN161772	AN161773	AN161774
4.625	AN161775	AN161776	AN161777	AN161778	AN161779	AN161780
4.750	AN161781	AN161782	AN161783	AN161784	AN161785	AN161786
4.875	AN161787	AN161788	AN161789	AN161790	AN161791	AN161792
5.000	AN161793	AN161794	AN161795	AN161796	AN161797	AN161798
5.125	AN161799	AN161800	AN161801	AN161802	AN161803	AN161804
5.250	AN161805	AN161806	AN161807	AN161808	AN161809	AN161810
5.375	AN161811	AN161812	AN161813	AN161814	AN161815	AN161816
5.500	AN161817	AN161818	AN161819	AN161820	AN161821	AN161822

NOTE: PITCH DIAMETERS OF BOTH THREADED ENDS SHALL BE CONCENTRIC WITHIN .006 FIR.
MATERIAL: STEEL AMS 6322 (AMS 6320 MATERIAL MAY ALSO BE USED FOR THIS PART UNTIL JANUARY 1, 1957).
HARDNESS: ROCKWELL C26-32.
FINISH: CADMIUM PLATE AMS 2400. DIMENSIONS ARE AFTER PLATING EXCEPT WHERE SHOWN.
SURFACE ROUGHNESS: AS 107.
MANUFACTURING SPECIFICATION: AMS 7456. PARTS SUBJECT TO MAGNETIC INSPECTION PER AMS 2640.
BREAK SHARP EDGES .003-.015 UNLESS OTHERWISE SPECIFIED.
DIMENSIONS IN INCHES. UNLESS OTHERWISE SPECIFIED: TOLERANCES; LINEAR DIMENSIONS ±.010.

(2) INACTIVE FOR DESIGN AFTER 26 OCTOBER 1972. NO SUPERSEDING STANDARD.

DO NOT USE UNASSIGNED PART NUMBERS. (3) CANCELED AS OF 9 OCT 87

THIS STANDARD WAS DEVELOPED COOPERATIVELY WITH THE ENGINE AND PROPELLER UTILITY PARTS COMMITTEE OF THE SAE.

APPROVED ... REVISED (1) 25 Mar 55 (2) 26 Oct 72 (3) 9 OCT 87

PROCUREMENT SPECIFICATION	AIR FORCE-NAVY AERONAUTICAL STANDARD	AN161601 THRU AN161900
NONE	STUD-STEPPED, NECKED, 2 DIA ENGAGEMENT, .500-13 x .4375-20	

E-25-121 Source: https://assist.dla.mil -- Downloaded: 2026-10-26T14:28Z
Check the source to verify that this is the current version before use.