
FED. SUP CLASS. 5307

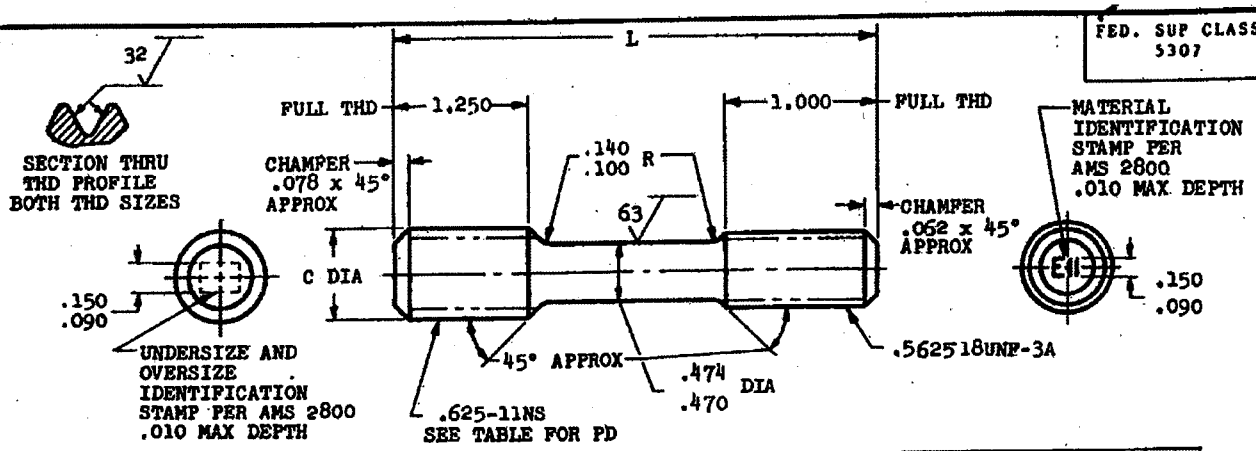


| UNDERSIZE AND OVERSIZE IDENTIFICATION | -.003 (-3) | STANDARD | +.003 (3) | +.006 (6) | +.009 (9) | +.012 (12) |
|---|---|---|---|---|---|---|
| C | .620- .625 | .620- .625 | .620- .625 | .620- .625 | .629- .634 | .629- .634 |
| PD BEFORE PLATING | .5682-.5692 | .5712-.5722 | .5742-.5752 | .5772-.5782 | .5802-.5812 | .5832-.5842 |
| PD AFTER PLATING | .5687-.5702 | .5717-.5732 | .5747-.5762 | .5777-.5792 | .5807-.5822 | .5837-.5852 |
| PD LEAD THREAD | .5610-.5630 | .5640-.5660 | .5670-.5690 | .5700-.5720 | .5730-.5750 | .5760-.5780 |
| L | PART NUMBER | PART NUMBER | PART NUMBER | PART NUMBER | PART NUMBER | PART NUMBER |
| 2.500 | AN162213 | AN162214 | AN162215 | AN162216 | AN162217 | AN162218 |
| 2.562 | AN162219 | AN162220 | AN162221 | AN162222 | AN162223 | AN162224 |
| 2.625 | AN162225 | AN162226 | AN162227 | AN162228 | AN162229 | AN162230 |
| 2.688 | AN162231 | AN162232 | AN162233 | AN162234 | AN162235 | AN162236 |
| 2.750 | AN162237 | AN162238 | AN162239 | AN162240 | AN162241 | AN162242 |
| 2.812 | AN162243 | AN162244 | AN162245 | AN162246 | AN162247 | AN162248 |
| 2.875 | AN162249 | AN162250 | AN162251 | AN162252 | AN162253 | AN162254 |
| 2.938 | AN162255 | AN162256 | AN162257 | AN162258 | AN162259 | AN162260 |
| 3.000 | AN162261 | AN162262 | AN162263 | AN162264 | AN162265 | AN162266 |
| 3.125 | AN162267 | AN162268 | AN162269 | AN162270 | AN162271 | AN162272 |
| 3.250 | AN162273 | AN162274 | AN162275 | AN162276 | AN162277 | AN162278 |
| 3.375 | AN162279 | AN162280 | AN162281 | AN162282 | AN162283 | AN162284 |
| 3.500 | AN162285 | AN162286 | AN162287 | AN162288 | AN162289 | AN162290 |
| 3.625 | AN162291 | AN162292 | AN162293 | AN162294 | AN162295 | AN162296 |
| 3.750 | AN162297 | AN162298 | AN162299 | AN162300 | AN162301 | AN162302 |
| 3.875 | AN162303 | AN162304 | AN162305 | AN162306 | AN162307 | AN162308 |
| 4.000 | AN162309 | AN162310 | AN162311 | AN162312 | AN162313 | AN162314 |
| 4.125 | AN162315 | AN162316 | AN162317 | AN162318 | AN162319 | AN162320 |
| 4.250 | AN162321 | AN162322 | AN162323 | AN162324 | AN162325 | AN162326 |
| 4.375 | AN162327 | AN162328 | AN162329 | AN162330 | AN162331 | AN162332 |
| 4.500 | AN162333 | AN162334 | AN162335 | AN162336 | AN162337 | AN162338 |
| 4.625 | AN162339 | AN162340 | AN162341 | AN162342 | AN162343 | AN162344 |
| 4.750 | AN162345 | AN162346 | AN162347 | AN162348 | AN162349 | AN162350 |
| 4.875 | AN162351 | AN162352 | AN162353 | AN162354 | AN162355 | AN162356 |
| 5.000 | AN162357 | AN162358 | AN162359 | AN162360 | AN162361 | AN162362 |
| 5.125 | AN162363 | AN162364 | AN162365 | AN162366 | AN162367 | AN162368 |
| 5.250 | AN162369 | AN162370 | AN162371 | AN162372 | AN162373 | AN162374 |
| 5.375 | AN162375 | AN162376 | AN162377 | AN162378 | AN162379 | AN162380 |
| 5.500 | AN162381 | AN162382 | AN162383 | AN162384 | AN162385 | AN162386 |
| 5.625 | AN162387 | AN162388 | AN162389 | AN162390 | AN162391 | AN162392 |
| 5.750 | AN162393 | AN162394 | AN162395 | AN162396 | AN162397 | AN162398 |
| 5.875 | AN162399 | AN162400 | AN162401 | AN162402 | AN162403 | AN162404 |
| 6.000 | AN162405 | AN162406 | AN162407 | AN162408 | AN162409 | AN162410 |
| 6.125 | AN162411 | AN162412 | AN162413 | AN162414 | AN162415 | AN162416 |
| 6.250 | AN162417 | AN162418 | AN162419 | AN162420 | AN162421 | AN162422 |

NOTE: PITCH DIAMETERS OF BOTH THREADED ENDS SHALL BE CONCENTRIC WITHIN .006 FIR.
MATERIAL: STEEL AMS 6322 (AMS 6320 MATERIAL MAY ALSO BE USED FOR THIS PART UNTIL JANUARY 1, 1957).
HARDNESS: ROCKWELL C26-32.
FINISH: CADMIUM PLATE AMS 2400. DIMENSIONS ARE AFTER PLATING EXCEPT WHERE SHOWN.
SURFACE ROUGHNESS: AS 107.
MANUFACTURING SPECIFICATION: AMS 7456.
(3) INSPECTION: ALL PARTS SHALL UNDERGO MAGNETIC INSPECTION IN ACCORDANCE WITH AMS2640.
BREAK SHARP EDGES .003-.015 UNLESS OTHERWISE SPECIFIED.
DIMENSIONS IN INCHES. UNLESS OTHERWISE SPECIFIED: TOLERANCES; LINEAR DIMENSIONS ±.010.

**INACTIVE FOR DESIGN AFTER 26 OCTOBER 1972. NO SUPERSEDING STANDARD.**

DO NOT USE UNASSIGNED PART NUMBERS.
THIS STANDARD WAS DEVELOPED COOPERATIVELY WITH THE ENGINE AND PROPELLER UTILITY PARTS COMMITTEE OF THE SAE.

APPROVED 19 MAY 50 REVISED (1) 25 MAR 55 (2) 26 OCT 72 (3) 30 June 1986

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

NOTE: This drawing was approved by joint action of the Air Force and Navy Departments as the Air Force-Navy standard for this product. This drawing supersedes all conflicting standard drawings for the same product and shall not be used for procurement of new design not later than 6 months after the latest date of approval, except for use in the design of replacement assemblies or for use in the procurement of spare parts for such assemblies.

NOTE: When Government drawings, specifications or other data are used for any purpose other than in connection with a definitely related Government procurement operation, the United States Government thereby incurs no responsibility, nor any obligation whatsoever; and the fact that the Government may have formulated, furnished, or in any way supplied the said drawings, specifications or other data is not to be regarded by implication or otherwise in any manner construed, as licensing the holder, or any other person or corporation; or conveying any rights or permission to manufacture, use or sell any patented invention that may in any way be related thereto.

| P.A. 11 | AERONAUTICAL STANDARD | AN162201 THRU AN162500 |
|---|---|---|
| OTHER CUST | STUD-STEPPED, NECKED, 2 DIA ENGAGEMENT, .625-11 x .5625-18 | |
| PROCUREMENT SPECIFICATION NONE | | SHEET 1 OF 1 |

DISC Form 1299 APR 76

Project No. 5307-0404

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T14:28Z
Check the source to verify that this is the current version before use.