
AN164301 THRU AN164600

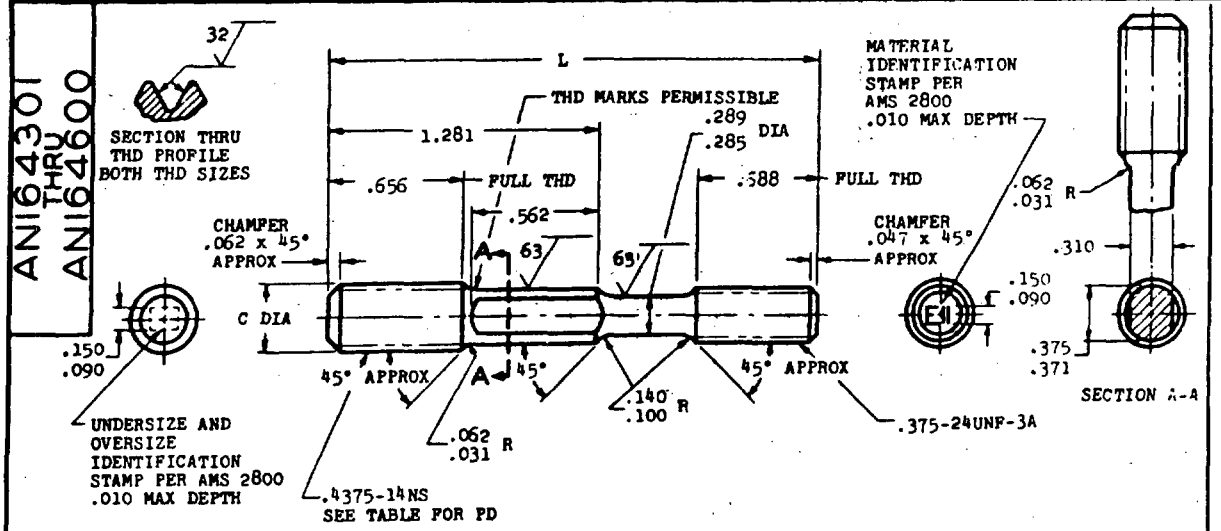

UNDERSIZE AND OVERSIZE IDENTIFICATION	-.003 (-3)	STANDARD	+.003 (3)	+.006 (6)	+.009 (9)	+.012 (12)
C	.433- .438	.433- .438	.433- .438	.433- .438	.442- .447	.442- .447
PD BEFORE PLATING	.3927-.3937	.3957-.3967	.3987-.3997	.4017-.4027	.4047-.4057	.4077-.4087
PD AFTER PLATING	.3932-.3947	.3962-.3977	.3992-.4007	.4022-.4037	.4052-.4067	.4082-.4097
PD LEAD THREAD	.3861-.3881	.3891-.3911	.3921-.3941	.3951-.3971	.3981-.4001	.4011-.4031
L	PART NUMBER	PART NUMBER	PART NUMBER	PART NUMBER	PART NUMBER	PART NUMBER
2.219	AN164313	AN164314	AN164315	AN164316	AN164317	AN164318
2.281	AN164319	AN164320	AN164321	AN164322	AN164323	AN164324
2.344	AN164325	AN164326	AN164327	AN164328	AN164329	AN164330
2.406	AN164331	AN164332	AN164333	AN164334	AN164335	AN164335
2.531	AN164337	AN164338	AN164339	AN164340	AN164341	AN164342
2.656	AN164343	AN164344	AN164345	AN164346	AN164347	AN164348
2.781	AN164349	AN164350	AN164351	AN164352	AN164353	AN164354
2.906	AN164355	AN164356	AN164357	AN164358	AN164359	AN164360
3.031	AN164361	AN164362	AN164363	AN164364	AN164365	AN164366
3.156	AN164367	AN164368	AN164369	AN164370	AN164371	AN164372
3.281	AN164373	AN164374	AN164375	AN164376	AN164377	AN164378
3.406	AN164379	AN164380	AN164381	AN164382	AN164383	AN164384
3.531	AN164385	AN164386	AN164387	AN164388	AN164389	AN164390
3.656	AN164391	AN164392	AN164393	AN164394	AN164395	AN164396
3.781	AN164397	AN164398	AN164399	AN164400	AN164401	AN164402
3.906	AN164403	AN164404	AN164405	AN164406	AN164407	AN164408
4.031	AN164409	AN164410	AN164411	AN164412	AN164413	AN164414
4.156	AN164415	AN164416	AN164417	AN164418	AN164419	AN164420
4.281	AN164421	AN164422	AN164423	AN164424	AN164425	AN164426
4.406	AN164427	AN164428	AN164429	AN164430	AN164431	AN164432
4.531	AN164433	AN164434	AN164435	AN164436	AN164437	AN164438
4.656	AN164439	AN164440	AN164441	AN164442	AN164443	AN164444
4.781	AN164445	AN164446	AN164447	AN164448	AN164449	AN164450
4.906	AN164451	AN164452	AN164453	AN164454	AN164455	AN164456
5.031	AN164457	AN164458	AN164459	AN164460	AN164461	AN164462
5.156	AN164463	AN164464	AN164465	AN164466	AN164467	AN164468
5.281	AN164469	AN164470	AN164471	AN164472	AN164473	AN164474
5.406	AN164475	AN164476	AN164477	AN164478	AN164479	AN164480
5.531	AN164481	AN164482	AN164483	AN164484	AN164485	AN164486
5.656	AN164487	AN164488	AN164489	AN164490	AN164491	AN164492
5.781	AN164493	AN164494	AN164495	AN164496	AN164497	AN164498
5.906	AN164499	AN164500	AN164501	AN164502	AN164503	AN164504

NOTE: PITCH DIAMETERS OF BOTH THREADED ENDS SHALL BE CONCENTRIC WITHIN .006 FIR.
MATERIAL: STEEL AMS 6322 (AMS 6320 MATERIAL MAY ALSO BE USED FOR THIS PART UNTIL JANUARY 1, 1957).
HARDNESS: ROCKWELL C26-32.
FINISH: CADMIUM PLATE AMS 2400. DIMENSIONS ARE AFTER PLATING EXCEPT WHERE SHOWN.
SURFACE ROUGHNESS: AS 107.
MANUFACTURING SPECIFICATION: AMS 7456. PARTS SUBJECT TO MAGNETIC INSPECTION PER AMS 2540.
BREAK SHARP EDGES .003-.015 UNLESS OTHERWISE SPECIFIED.
DIMENSIONS IN INCHES. UNLESS OTHERWISE SPECIFIED: TOLERANCES; LINEAR DIMENSIONS ±.010, ANGULAR DIMENSIONS ±2°

(2) INACTIVE FOR DESIGN AFTER 26 OCTOBER 1972. NO SUPERSEDING STANDARD. DO NOT USE UNASSIGNED PART NUMBERS. (3) CANCELED AS OF 9 OCT *&

THIS STANDARD WAS DEVELOPED COOPERATIVELY WITH THE ENGINE AND PROPELLER UTILITY PARTS COMMITTEE OF THE SAE.

APPROVED 19 MAY 50 REVISED (1) 25 Mar 55 (2) 26 Oct 72 (3) 9 OCT 87

PROCUREMENT SPECIFICATION	AIR FORCE-NAVY AERONAUTICAL STANDARD	AN164301 THRU AN164600
NONE	STUD-STEPPED, HECKED, WRENCH PAD, 1.5 DIA ENGAGEMENT, .4375-14 x .375-24	

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

E-25-121 Project 5307-0411

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T14:28Z
Check the source to verify that this is the current version before use.