
DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

AN164601 THRU AN164900

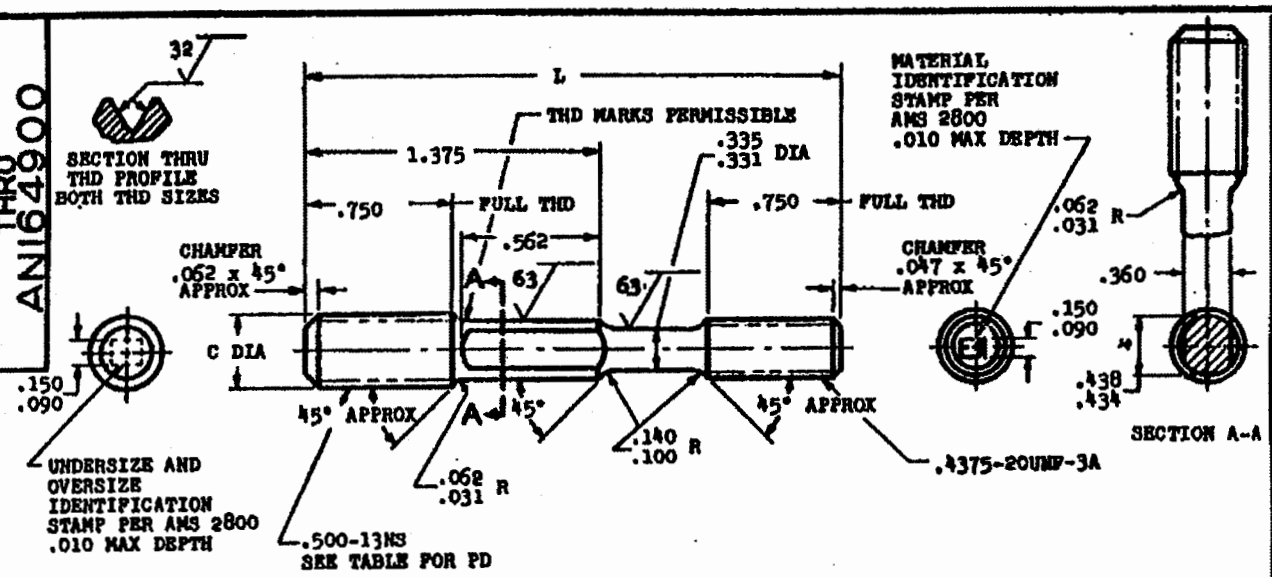

UNDERSIZE AND OVERSIZE IDENTIFICATION	-.003 (-3)	STANDARD	+.003 (3)	+.006 (6)	+.009 (2)	+.012 (12)
C	.495- .500	.495- .500	.495- .500	.495- .500	.504- .509	.504- .509
PD BEFORE PLATING	.4518-.4528	.4548-.4558	.4578-.4588	.4608-.4618	.4638-.4648	.4668-.4678
PD AFTER PLATING	.4523-.4538	.4553-.4568	.4583-.4598	.4613-.4628	.4643-.4658	.4673-.4688
PD LEAD THREAD	.4450-.4470	.4480-.4500	.4510-.4530	.4540-.4560	.4570-.4590	.4600-.4620
L	PART NUMBER	PART NUMBER	PART NUMBER	PART NUMBER	PART NUMBER	PART NUMBER
2.375	AN164613	AN164614	AN164615	AN164616	AN164617	AN164618
2.438	AN164619	AN164620	AN164621	AN164622	AN164623	AN164624
2.500	AN164625	AN164626	AN164627	AN164628	AN164629	AN164630
2.625	AN164631	AN164632	AN164633	AN164634	AN164635	AN164636
2.750	AN164637	AN164638	AN164639	AN164640	AN164641	AN164642
2.875	AN164643	AN164644	AN164645	AN164646	AN164647	AN164648
3.000	AN164649	AN164650	AN164651	AN164652	AN164653	AN164654
3.125	AN164655	AN164656	AN164657	AN164658	AN164659	AN164660
3.250	AN164661	AN164662	AN164663	AN164664	AN164665	AN164666
3.375	AN164667	AN164668	AN164669	AN164670	AN164671	AN164672
3.500	AN164673	AN164674	AN164675	AN164676	AN164677	AN164678
3.625	AN164679	AN164680	AN164681	AN164682	AN164683	AN164684
3.750	AN164685	AN164686	AN164687	AN164688	AN164689	AN164690
3.875	AN164691	AN164692	AN164693	AN164694	AN164695	AN164696
4.000	AN164697	AN164698	AN164699	AN164700	AN164701	AN164702
4.125	AN164703	AN164704	AN164705	AN164706	AN164707	AN164708
4.250	AN164709	AN164710	AN164711	AN164712	AN164713	AN164714
4.375	AN164715	AN164716	AN164717	AN164718	AN164719	AN164720
4.500	AN164721	AN164722	AN164723	AN164724	AN164725	AN164726
4.625	AN164727	AN164728	AN164729	AN164730	AN164731	AN164732
4.750	AN164733	AN164734	AN164735	AN164736	AN164737	AN164738
4.875	AN164739	AN164740	AN164741	AN164742	AN164743	AN164744
5.000	AN164745	AN164746	AN164747	AN164748	AN164749	AN164750
5.125	AN164751	AN164752	AN164753	AN164754	AN164755	AN164756
5.250	AN164757	AN164758	AN164759	AN164760	AN164761	AN164762
5.375	AN164763	AN164764	AN164765	AN164766	AN164767	AN164768
5.500	AN164769	AN164770	AN164771	AN164772	AN164773	AN164774
5.625	AN164775	AN164776	AN164777	AN164778	AN164779	AN164780
5.750	AN164781	AN164782	AN164783	AN164784	AN164785	AN164786
5.875	AN164787	AN164788	AN164789	AN164790	AN164791	AN164792
6.000	AN164793	AN164794	AN164795	AN164796	AN164797	AN164798
6.125	AN164799	AN164800	AN164801	AN164802	AN164803	AN164804
6.250	AN164805	AN164806	AN164807	AN164808	AN164809	AN164810

NOTE: PITCH DIAMETERS OF BOTH THREADED ENDS SHALL BE CONCENTRIC WITHIN .006 FIR.
MATERIAL: STEEL AMS 6322 (AMS 6320 MATERIAL MAY ALSO BE USED FOR THIS PART UNTIL JANUARY 1, 1957).
HARDNESS: ROCKWELL C26-32.
FINISH: CADMIUM PLATE AMS 2400. DIMENSIONS ARE AFTER PLATING EXCEPT WHERE SHOWN.
SURFACE ROUGHNESS: AS 107.
MANUFACTURING SPECIFICATION: AMS 7456. PARTS SUBJECT TO MAGNETIC INSPECTION PER AMS 2640.
BREAK SHARP EDGES .003-.015 UNLESS OTHERWISE SPECIFIED.
DIMENSIONS IN INCHES. UNLESS OTHERWISE SPECIFIED: TOLERANCES; LINEAR DIMENSIONS ±.010, ANGULAR DIMENSIONS ±2°.

(2) INACTIVE FOR DESIGN AFTER 26 OCTOBER 1972. NO SUPERSEDING STANDARD.
DO NOT USE UNASSIGNED PART NUMBERS. (3) CANCELED AS OF 9 OCT 87

THIS STANDARD WAS DEVELOPED COOPERATIVELY WITH THE ENGINE AND PROPELLER UTILITY PARTS COMMITTEE OF THE SAE.

APPROVED 19 May 50 REVISED (1) 25 Jan 55 (2) 26 Oct 72 (3) 9 OCT 87

PROCUREMENT SPECIFICATION	AIR FORCE-NAVY AERONAUTICAL STANDARD	AN164601 THRU AN164900
NONE	STUD-STEPPED, NECKED, WRENCH PAD, 1.5 DIA ENGAGEMENT, .500-13 x .4375-20	

E-5-12

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T14:28Z
Check the source to verify that this is the current version before use.